



Essential LED Bulb



## Technical Application Guide

# Philips

## Essential LED Bulb 3000K/6500K 230V

Philips Essential LED Bulb is a sustainable green light bulb to ensure direct replacement of GLS bulbs in indoor application.

With latest LED technology, Essential LED Bulb offers over 85% energy saving and lasts 8 years (if lit 2.7 hours per day across 365 days) to save your total investment cost.

From LED chips chosen to the final assembly, different kinds of professional quality control methods are adopted to guarantee the light quality consistency through product lifetime.

The product is professionally designed to endure surge and environmental tests to make sure it can be adapted into different indoor application situations.




85%  
Energy cost  
saving

[www.philips.com](http://www.philips.com)



## Design highlights

- Form factor is designed as a direct retrofit into A60 fixtures
- Over 85% energy-saving compared with GLS
- Long lifetime of 8 years (if lit 2.7 hours per day across 365 days)
- Warm white CCT 3000K and cool daylight CCT 6500K available
- Environmental friendly, no Mercury or any other hazardous substances
- Low Carbon Footprint

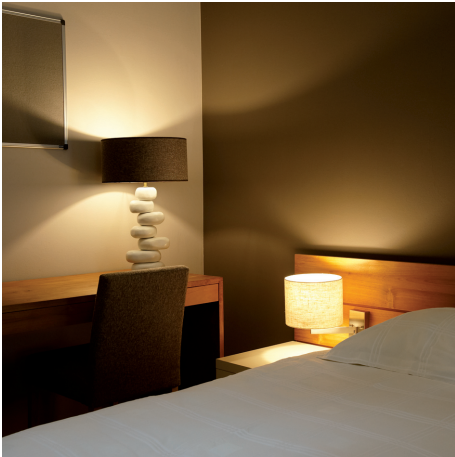

## Application areas

The qualified light makes it suitable for general indoor applications such as:

- Elite shops
- Corridors / Stairways / Washrooms
- Lobby / Reception areas
- Hotel rooms / Bars
- Home

## Application notes

- Operating temperature range is between -20 °C and 45 °C ambient
- Only to apply in dry or damp locations and most of open fixtures with E27/E26/B22 lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights
- Not intended for enclosed luminaires

# Product features


## Technical Specifications

Product type	Voltage (V)	Wattage (W)	Cap	Bulb shape	CCT (K)	Lumen (Lm)	Luminous efficacy (=lm/W)	Lifetime (hours)	CRI	Dimmable
ESS LEDBulb 5-40W E27 3000K 230V A60	220~240	5.0	E27	A60	3000K	315	63	8000	70	No
ESS LEDBulb 5-40W E27 6500K 230V A60	220~240	5.0	E27	A60	6500K	350	70	8000	70	No
ESS LEDBulb 7-55W E27 3000K 230V A60	220~240	7.0	E27	A60	3000K	480	69	8000	70	No
ESS LEDBulb 7-55W E27 6500K 230V A60	220~240	7.0	E27	A60	6500K	540	77	8000	70	No
ESS LEDBulb 9-65W E27 3000K 230V A60	220~240	9.0	E27	A60	3000K	650	72	8000	70	No
ESS LEDBulb 9-65W E27 6500K 230V A60	220~240	9.0	E27	A60	6500K	720	80	8000	70	No
ESS LEDBulb 5-40W E26 3000K 230V A60	220~240	5.0	E26	A60	3000K	315	63	8000	70	No
ESS LEDBulb 5-40W E26 6500K 230V A60	220~240	5.0	E26	A60	6500K	350	70	8000	70	No
ESS LEDBulb 7-55W E26 3000K 230V A60	220~240	7.0	E26	A60	3000K	480	69	8000	70	No
ESS LEDBulb 7-55W E26 6500K 230V A60	220~240	7.0	E26	A60	6500K	540	77	8000	70	No
ESS LEDBulb 9-65W E26 3000K 230V A60	220~240	9.0	E26	A60	3000K	650	72	8000	70	No
ESS LEDBulb 9-65W E26 6500K 230V A60	220~240	9.0	E26	A60	6500K	720	80	8000	70	No
ESS LEDBulb 5-40W B22 3000K 230V A60	220~240	5.0	B22	A60	3000K	315	63	8000	70	No
ESS LEDBulb 5-40W B22 6500K 230V A60	220~240	5.0	B22	A60	6500K	350	70	8000	70	No
ESS LEDBulb 7-55W B22 3000K 230V A60	220~240	7.0	B22	A60	3000K	480	69	8000	70	No
ESS LEDBulb 7-55W B22 6500K 230V A60	220~240	7.0	B22	A60	6500K	540	77	8000	70	No
ESS LEDBulb 9-65W B22 3000K 230V A60	220~240	9.0	B22	A60	3000K	650	72	8000	70	No
ESS LEDBulb 9-65W B22 6500K 230V A60	220~240	9.0	B22	A60	6500K	720	80	8000	70	No

## Dimensions

Type	C typical Overall Length (mm)	D typical Diameter (mm)
ESS LEDBulb 5-40W E27 3000K 230V A60	106	60
ESS LEDBulb 5-40W E27 6500K 230V A60	106	60
ESS LEDBulb 7-55W E27 3000K 230V A60	106	60
ESS LEDBulb 7-55W E27 6500K 230V A60	106	60
ESS LEDBulb 9-65W E27 3000K 230V A60	106	60
ESS LEDBulb 9-65W E27 6500K 230V A60	106	60
ESS LEDBulb 5-40W E26 3000K 230V A60	104	60
ESS LEDBulb 5-40W E26 6500K 230V A60	104	60
ESS LEDBulb 7-55W E26 3000K 230V A60	104	60
ESS LEDBulb 7-55W E26 6500K 230V A60	104	60
ESS LEDBulb 9-65W E26 3000K 230V A60	104	60
ESS LEDBulb 9-65W E26 6500K 230V A60	104	60
ESS LEDBulb 5-40W B22 3000K 230V A60	105	60
ESS LEDBulb 5-40W B22 6500K 230V A60	105	60
ESS LEDBulb 7-55W B22 3000K 230V A60	105	60
ESS LEDBulb 7-55W B22 6500K 230V A60	105	60
ESS LEDBulb 9-65W B22 3000K 230V A60	105	60
ESS LEDBulb 9-65W B22 6500K 230V A60	105	60

LEDbulb

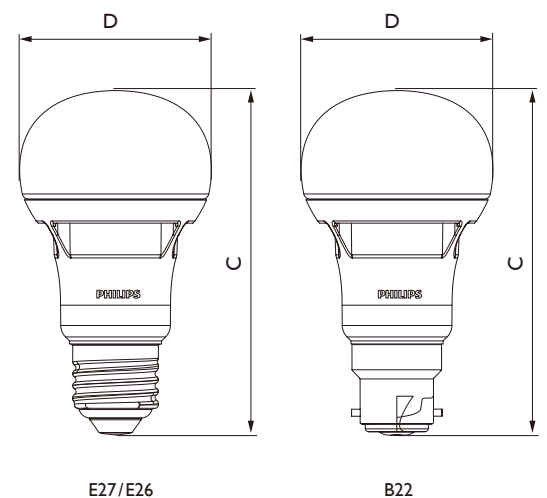


E27/E26


B22

# Spectral Power Distribution


Spectrum Essential LED Bulb 3000K

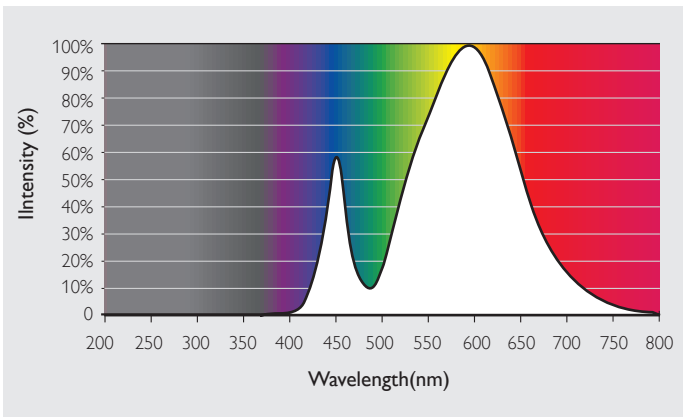

Spectrum Essential LED Bulb 6500K

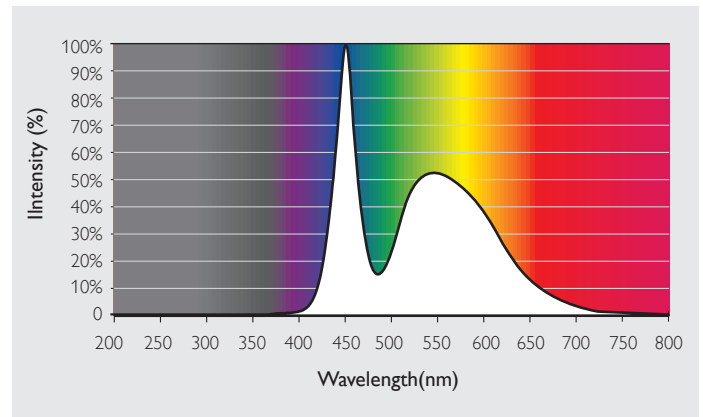

# Temperature

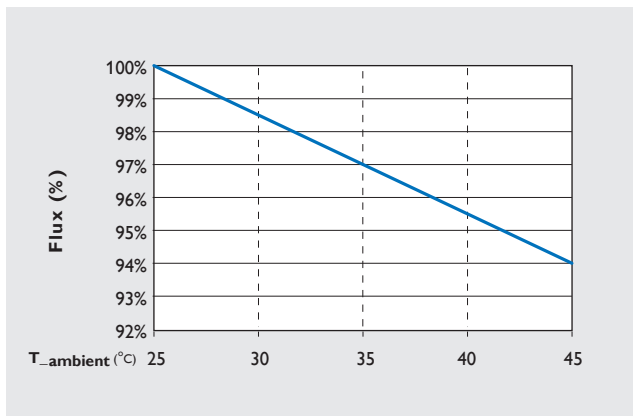

T<sub>c</sub> point

350/315 lm


T<sub>c</sub> Max: 102 °C

540/480 lm

T<sub>c</sub> Max: 88 °C

720/650 lm

T<sub>c</sub> Max: 105 °C

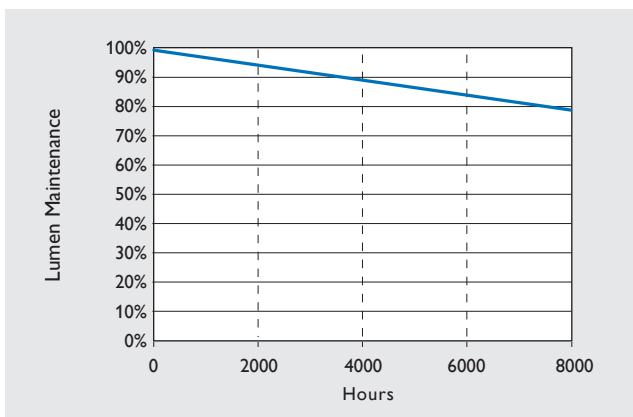

# Photometric Diagrams




Essential LED bulb A60 E27/E26/B22 5-40W 3000K

1 x 315 lm


Light output ratio 1.00  
Service upward 0.81  
Service downward 0.19

CIE flux code 7 26 56 19 100  
UGR<sub>cen</sub> (4Hx8H, 0.25H) 16


Polar intensity diagram



Quantity estimation diagram

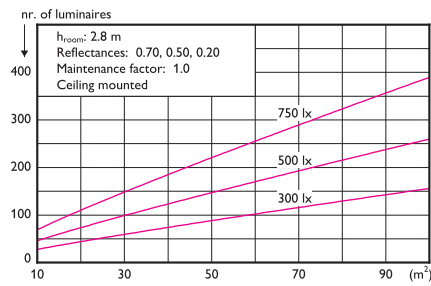

UGR diagram

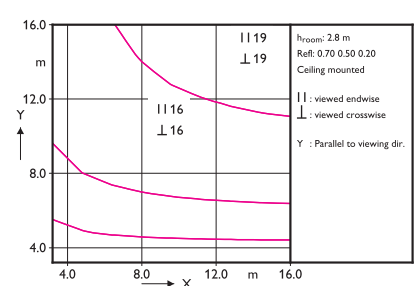


Essential LED bulb A60 E27/E26/B22 5-40W 6500K

1 x 350 lm


Light output ratio 1.00  
Service upward 0.81  
Service downward 0.19

CIE flux code 7 26 56 19 100  
UGR<sub>cen</sub> (4Hx8H, 0.25H) 16


Polar intensity diagram



Quantity estimation diagram

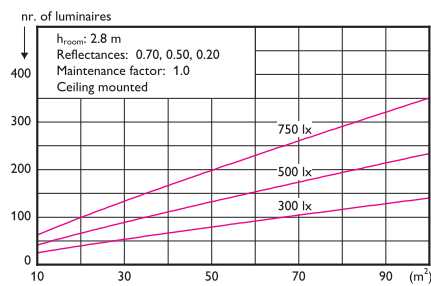

UGR diagram

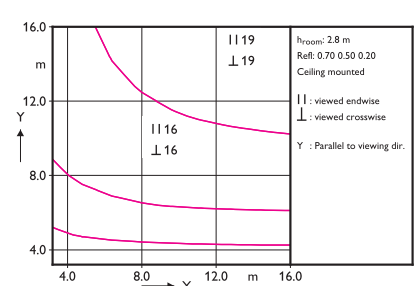


Essential LED bulb A60 E27/E26/B22 7-55W 3000K

1 x 480 lm


Light output ratio 1.00  
Service upward 0.81  
Service downward 0.19

CIE flux code 7 26 56 19 100  
UGR<sub>cen</sub> (4Hx8H, 0.25H) 17


Polar intensity diagram



Quantity estimation diagram

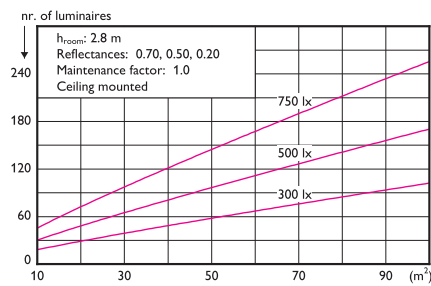

UGR diagram

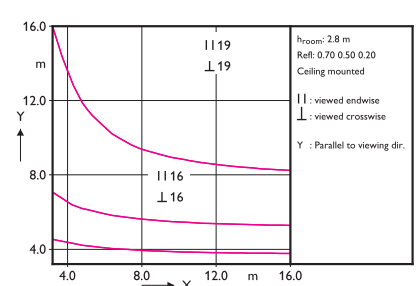






### Essential LED bulb A60 E27/E26/B22 7-55W 6500K

1 x 540 lm


Light output ratio 1.00  
Service upward 0.81  
Service downward 0.19

CIE flux code 7 26 56 19 100  
UGRcen (4Hx8H, 0.25H) 18


Polar intensity diagram



Quantity estimation diagram

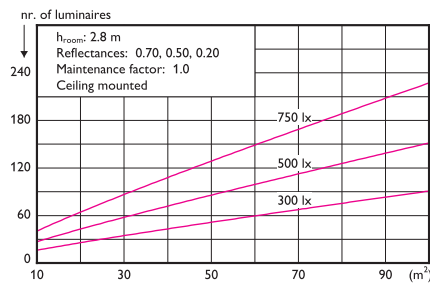

UGR diagram

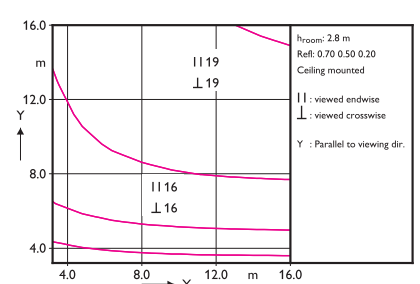


### Essential LED bulb A60 E27/E26/B22 9-65W 3000K

1 x 650 lm


Light output ratio 1.00  
Service upward 0.81  
Service downward 0.19

CIE flux code 7 26 56 19 100  
UGRcen (4Hx8H, 0.25H) 18


Polar intensity diagram



Quantity estimation diagram

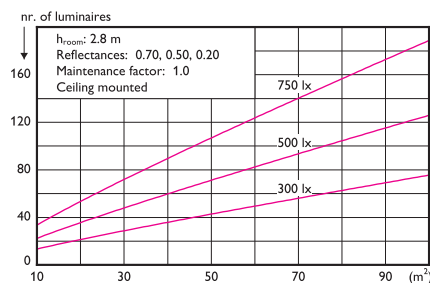

UGR diagram

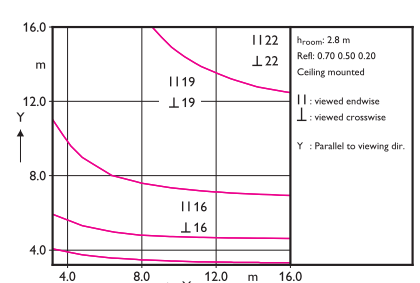


### Essential LED bulb A60 E27/E26/B22 9-65W 6500K

1 x 720 lm


Light output ratio 1.00  
Service upward 0.81  
Service downward 0.19

CIE flux code 7 26 56 19 100  
UGRcen (4Hx8H, 0.25H) 19


Polar intensity diagram




Quantity estimation diagram

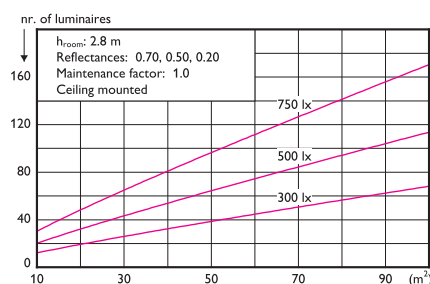

UGR diagram

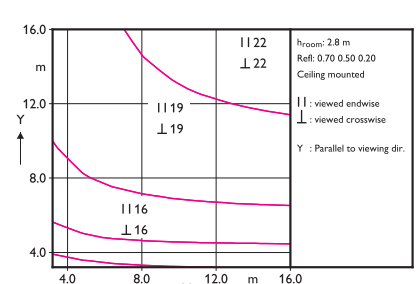

Failure Rate Curve of Essential LED bulb 3000K/6500K

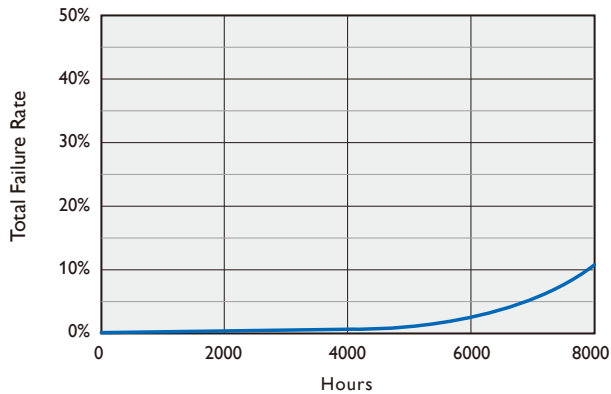

**Essential LED Bulb has a lifetime exceeding 8,000 hours defined as (F50L70), where:**

- F50L70, meaning 50% in total of whole population of lamps either fail without light output or lumen maintenance lower than 70% of initial value
- Lifetime estimation based on the application environment condition: at room temperature (25°C), free air burning, baseup burning position, and at rated voltage.



© 2016 Philips Lighting

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.

01/2016  
www.philips.com