

**PHILIPS  
ADVANCE**

LED Driver

Xitanium SR

75W 120-277V 0.7A SR  
XI075C070V118VSY1



Class P  
For Dry and Damp Location


The Philips Advance Xitanium SR LED driver can help reduce complexity and cost of light fixtures used in wireless connected lighting systems. It features a standard digital interface to enable direct connection to SR-certified components. Functionality that ordinarily would require additional auxiliary components is integrated into the driver. The result is a simple, cost-effective light fixture that can enable every fixture to become a wireless node.

**Specifications**


| Input Voltage (Vrms) | Output Power (W) | Output Voltage (V) | Output Current (A) | Efficiency@ Max. Load and 70°C Case | Max. Case Temp. (°C) | Input Current (Arms) | Max. Input Power (W) <sup>1</sup> | Inrush Current (Apk/10%-µs) | THD @ Max. Load | Power Factor @ Max. Load | Surge Protection Common/Diff (KV) | Weight (Lbs/kgs) | Envir. Protection Rating |
|----------------------|------------------|--------------------|--------------------|-------------------------------------|----------------------|----------------------|-----------------------------------|-----------------------------|-----------------|--------------------------|-----------------------------------|------------------|--------------------------|
| 120                  | 75               | 43-118             | 0.07-0.70          | 89                                  | 80                   | 0.74                 | 95                                | 38 / 200                    | <10%            | >0.95                    | 6/6                               | 1.50 / 0.68      | UL damp & dry            |
| 277                  |                  |                    |                    | 92                                  |                      | 0.32                 |                                   | 94 / 175                    |                 |                          |                                   |                  |                          |

**Enclosure**

|                 | In. (mm)     |
|-----------------|--------------|
| Case Length     | 5.43 (138.0) |
| Case Width      | 2.32 (59.0)  |
| Case Height     | 1.50 (38.0)  |
| Mounting Length | 5.98 (152.0) |
| Overall Length  | 6.61 (168.0) |

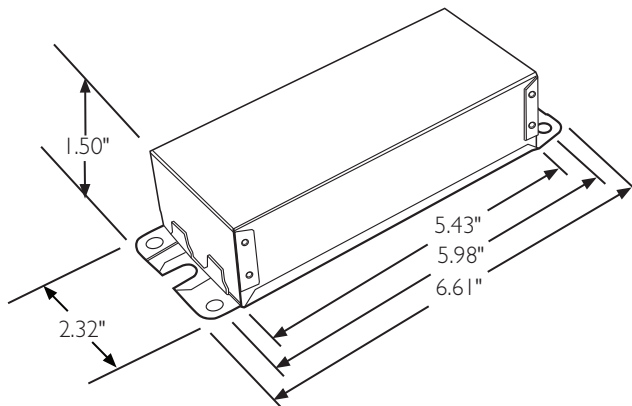

**Wiring Diagram**

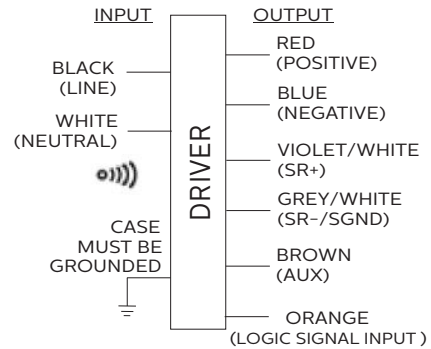

Input and output use lead-wires.

Lead-wires are 18AWG 105C/600V solid copper per UL1452.

Lead length outside enclosure: 270 mm (±30mm) on all wires.

| Dimming | Dimming Range | Minimum Output Current (A) |
|---------|---------------|----------------------------|
| DALI    | 10% ~ 100%    | 0.070                      |

1. Based on 1W load from SR power supply and 6.2W load from auxiliary power supply.

# Xitanium SR 75W 120-277V 0.7A

## Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

### Features

- Compatible with SR-certified devices
- Standard SR digital interface including integral power supply
- Auxiliary power supply for higher power device requirements
- Accurate power metering
- Logic signal input
- Drive current setting via SimpleSet
- 5-year limited warranty<sup>1</sup>

### Benefits

- Enables interoperability with multiple sensor/network system vendors
- Reduces cost and complexity of outdoor connected lighting systems<sup>2</sup>
- Eliminates need for high-voltage relays to increase system reliability
- 2% metering accuracy meets proposed ANSI standard C136.52
- Can be used with standard motion sensors for local control to complement network control

### Application

- Area
- Roadway
- Parking garages
- Floodlights

## Product Data

| Ordering Information            |  |
|---------------------------------|--|
| Order Code                      | XI075C070V118VSY1  |
| Full Product Code               | XI075C075C070V118VSY1M (Mid-pack, 10pcs/box)   |
| Full Product Name               | XITANIUM 150W 0.7A 120-277V SR   |
| Net Weight Per Piece            | 1.50 lbs / 0.68 kgs  |
| Input Information               |  |
| Inrush Current                  | Per NEMA 410   |
| Line Voltage (AC operation)     | 120-277VAC +/- 10%   |
| Line Current                    | 0.80A @ 120V, 0.35 @277V   |
| Line Frequency                  | 50/60Hz  |
| Surge Protection                | Refer to table   |
| Output Information              |  |
| Output Voltage Range            | 43VDC to 118VDC  |
| Output Current Range            | 0.07A to 0.70A   |
| Output Current Ripple           | <15% at max. Iout (ripple = pk-avg/avg) Low frequency (<120 Hz) content <1%                  |
| Output Current Tolerance        | ±5% at max. output current   |
| Open Circuit Voltage            | 180VDC max.  |
| Protections                     | Short Circuit and Open Circuit Protection for LED + and LED-                                 |
| Features                        |  |
| AOC (adjustable output current) | 0.07A to 0.70A via SimpleSet programming (refer to graphs and notes)                         |
| Life @ TC 80°C                  | 50,000 hr nom. @ TC 80°C; 100,000 hr nom. @ TC 70°C (refer to graphs)                        |
| Suitable for Outdoor Use?       | Yes  |
| Interfaces                      | AOC via SimpleSet or SR using MultiOne, SR, Logic Signal Input (LSI), Auxiliary Power Supply |
| Min. Ambient Temp               | -40°C  |
| Max. Case Temperature (Tcase)   | 80°C   |
| Input Over-voltage              | Can survive input over-voltage stress of 320VAC for 48 hours and 350VAC for 2 hours          |
| Earth Leakage Current           | 0.75 mA [max.]   |
| THD Total                       | Refer to graph   |

- <sup>1</sup> Philips Advance Xitanium LED drivers are designed and manufactured to engineering standards correlating to an average life expectancy of 50,000 hours of operation at maximum rated case temperature. Minimum 90% survivals based on MTBF modeling.
- <sup>2</sup> Functionality that ordinarily would require additional auxiliary components is integrated into the driver.

# Xitanium SR 75W 120-277V 0.7A

## Electrical Specifications

All specifications are typical and at 25°C Tcase unless specified otherwise.

## Product Data (continued)


|   |   |
|---|---|
| <b>Power Factor</b>                       | Refer to graph  |
| <b>Efficiency</b>                         | Refer to graph  |
| <b>Power Reporting Accuracy</b>           | ± 2% in performance window and under nominal operating conditions |
| <b>SR Interface</b>                       |   |
| <b>Digital Protocol</b>                   | Detailed specifications available to SR-Certified Partners        |
| <b>SR Power Supply</b>                    | Detailed specifications available to SR-Certified Partners        |
| <b>Auxiliary Power Supply</b>             |   |
| <b>Power</b>                              | 3W continuous, 10.5W peak for 1.2ms                               |
| <b>Voltage</b>                            | 24V+/-10%   |
| <b>Ripple</b>                             | 300mV peak-peak for resistive load                                |
| <b>Protection</b>                         | Overload and short circuit protected                              |
| <b>Last Gasp Energy</b>                   | 200mJ typ.  |
| <b>Logic Signal Input (LSI)</b>           |   |
| <b>Dry Contact Input</b>                  | Yes   |
| <b>Logic Low</b>                          | <3V or open   |
| <b>Logic High</b>                         | >7V   |
| <b>Max. Current Draw</b>                  | 2mA   |
| <b>Environment &amp; Approbation</b>      |   |
| <b>Agency Approbations</b>                | UL8750, UL1310, UL935, CSA-C22.2 No. 250.13-12, CSA C22.2 No. 223 |
| <b>Audible Noise</b>                      | <24dB Class A   |
| <b>Isolation Between Output and Input</b> | Refer to table  |
| <b>Isolation of Controls</b>              | Refer to table  |
| <b>EMC (electromagnetic compliance)</b>   | Meets FCC 47 Part 15 Class A                                      |
| <b>Envir. Protection Rating</b>           | UL Dry & Damp   |

# Xitanium SR 75W 120-277V 0.7A

## Electrical Specifications

All specifications are typical and at 25°C Tcase unless specified otherwise.

### Logic Signal Input (LSI) Characteristics (Typical)

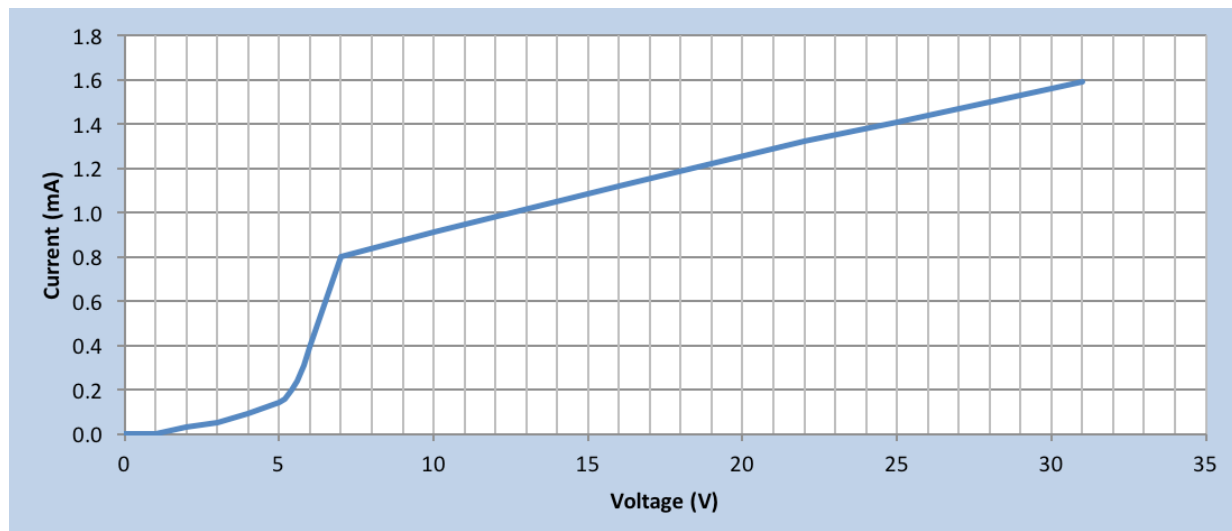


# Xitanium SR 75W 120-277V 0.7A

## Electrical Specifications

All specifications are typical and at 25°C Tcase unless specified otherwise.

## Operating Window

The driver current cutback feature provides for an increased output voltage with a reduced output current during abnormal LED operation, such as cold weather starting. Output tolerance +/-5%.

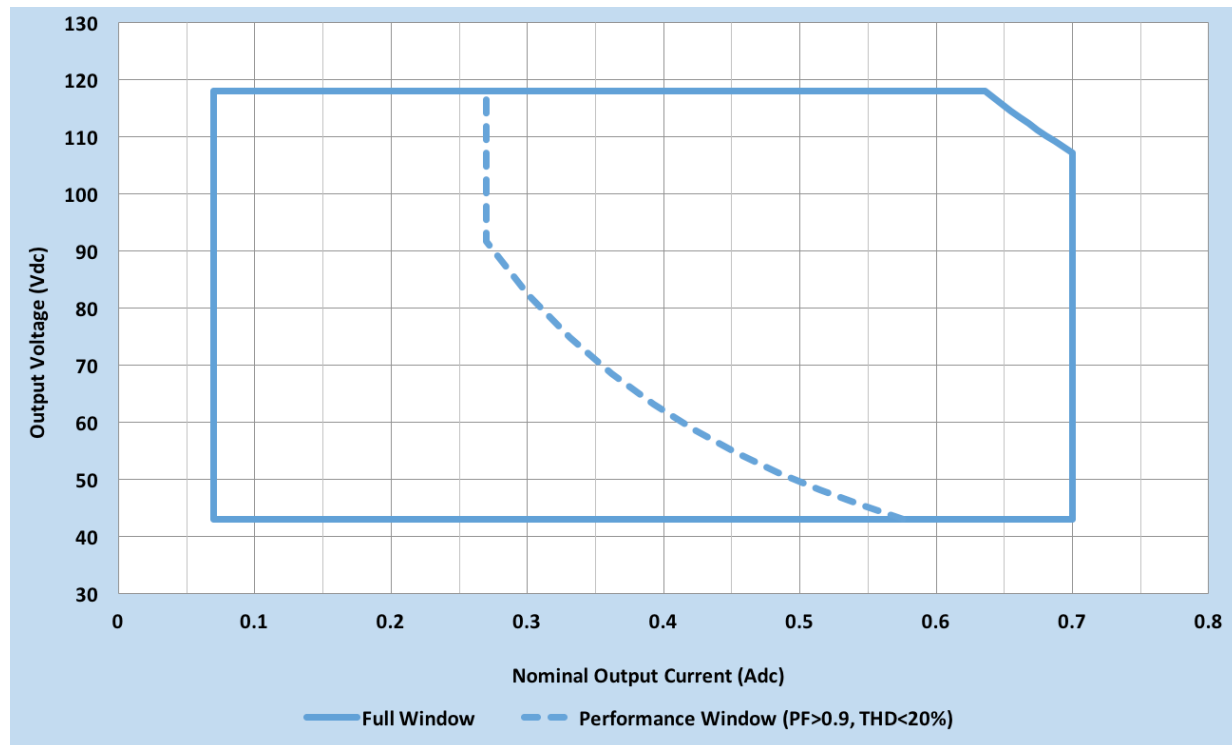



# Xitanium SR 75W 120-277V 0.7A

## Electrical Specifications

All specifications are typical and at 25°C Tcase unless specified otherwise.

## Dimming Characteristics

SR drivers use a logarithmic dimming curve as default. Dimming is accomplished through the 2-wire DALI connection to the sensor. DALI standard IEC62386\_102 Edition 2 defines the logarithmic dimming curve. DALI standard IEC62386\_101 Edition 2 defines the linear dimming curve as well as the command for switching between logarithmic and linear curves.

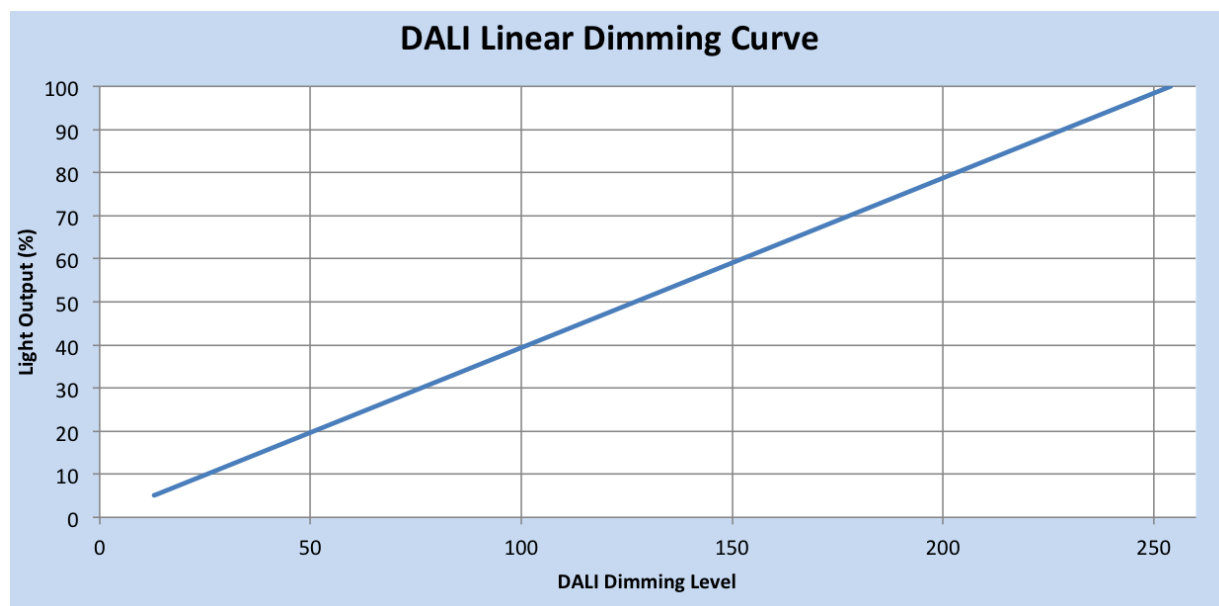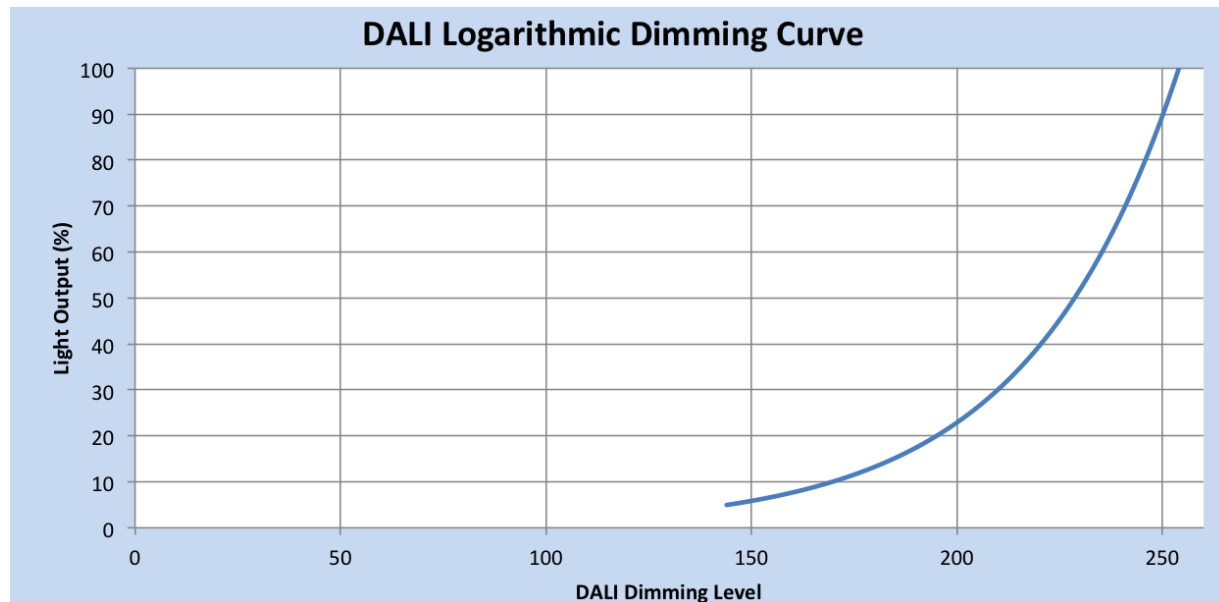


# Xitanium SR 75W 120-277V 0.7A


## Performance Characteristics

Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments. The graphs are meant to be a guideline and not a specification. Data below at 70°C Tcase.

### Efficiency Vs. Output Voltage @ 120VAC

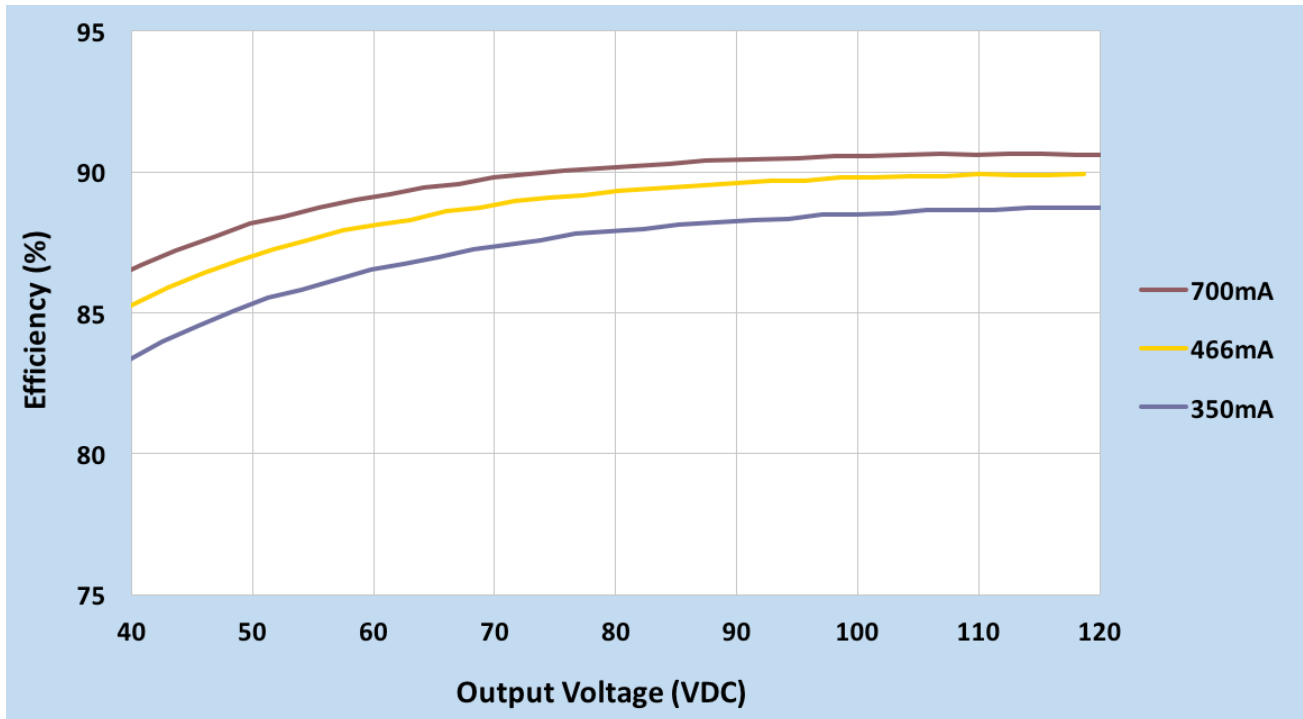

### Efficiency Vs. Output Voltage @ 277VAC

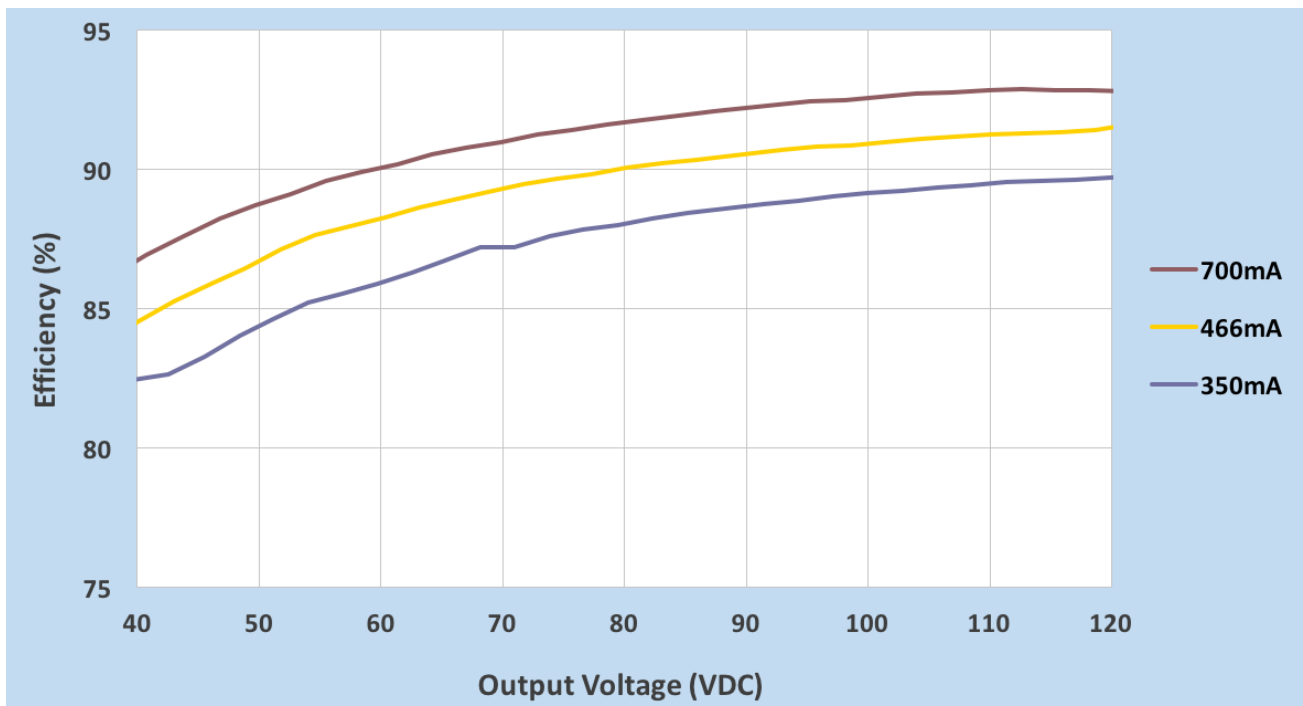


# Xitanium SR 75W 120-277V 0.7A


## Performance Characteristics

Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments. The graphs are meant to be a guideline and not a specification. Data below at 70°C Tcase.

### Power Factor Vs. Output Power

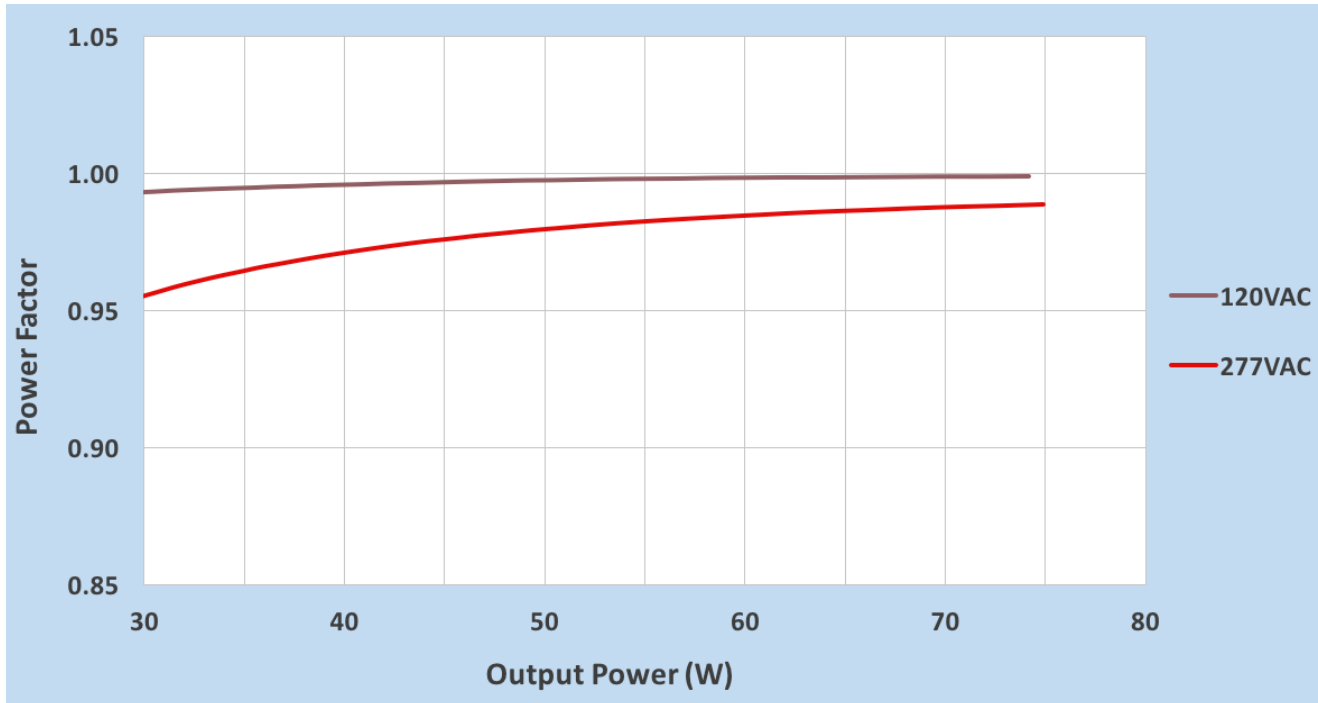

### Total Harmonic Distortion Vs. Output Power

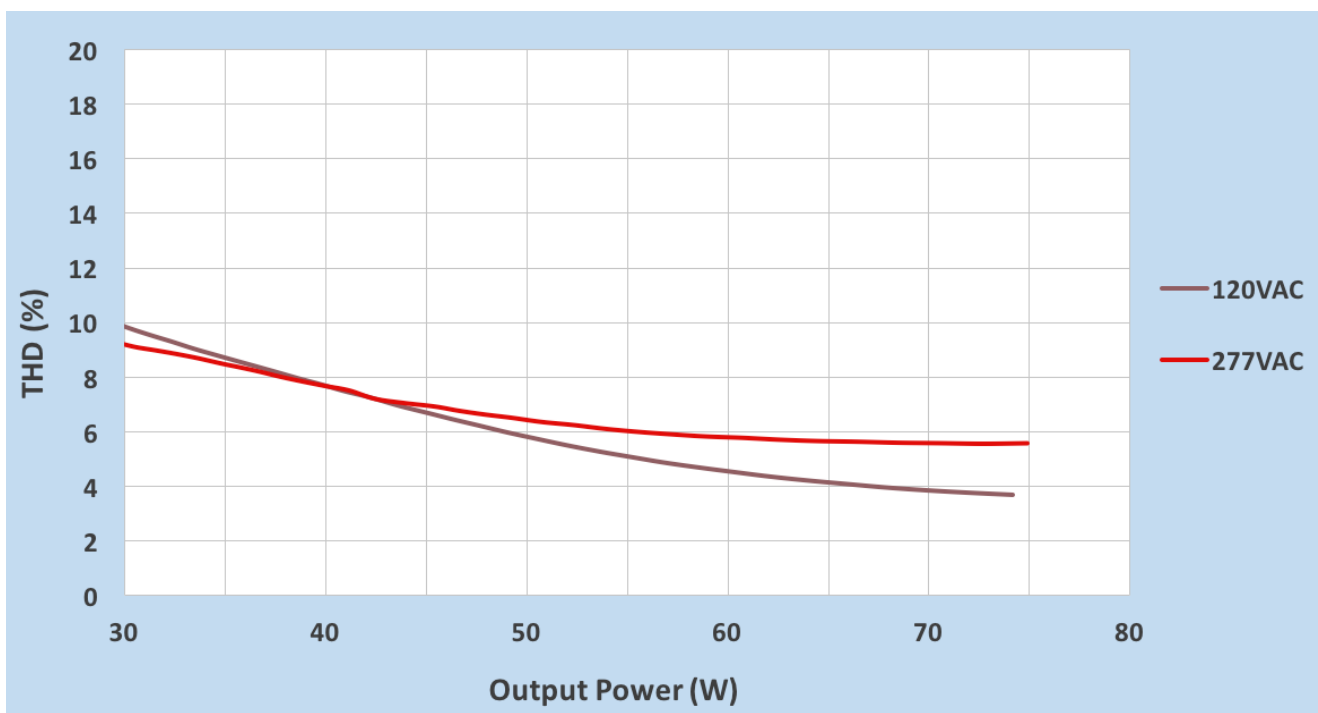




# Xitanium SR 75W 120-277V 0.7A


## Electrical Specifications

All specifications are typical and at 25°C Tcase unless specified otherwise.

### Output Current Vs. Driver Case Temperature

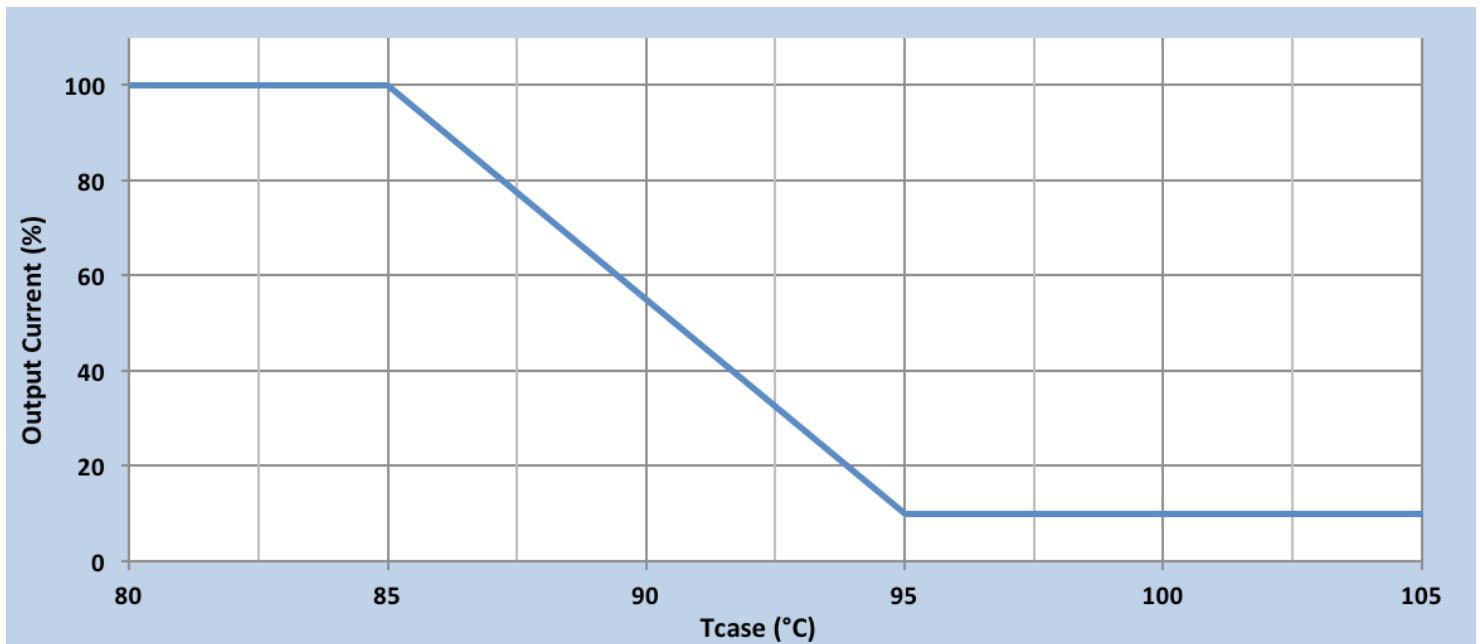


### Driver Lifetime Vs. Driver Case Temperature

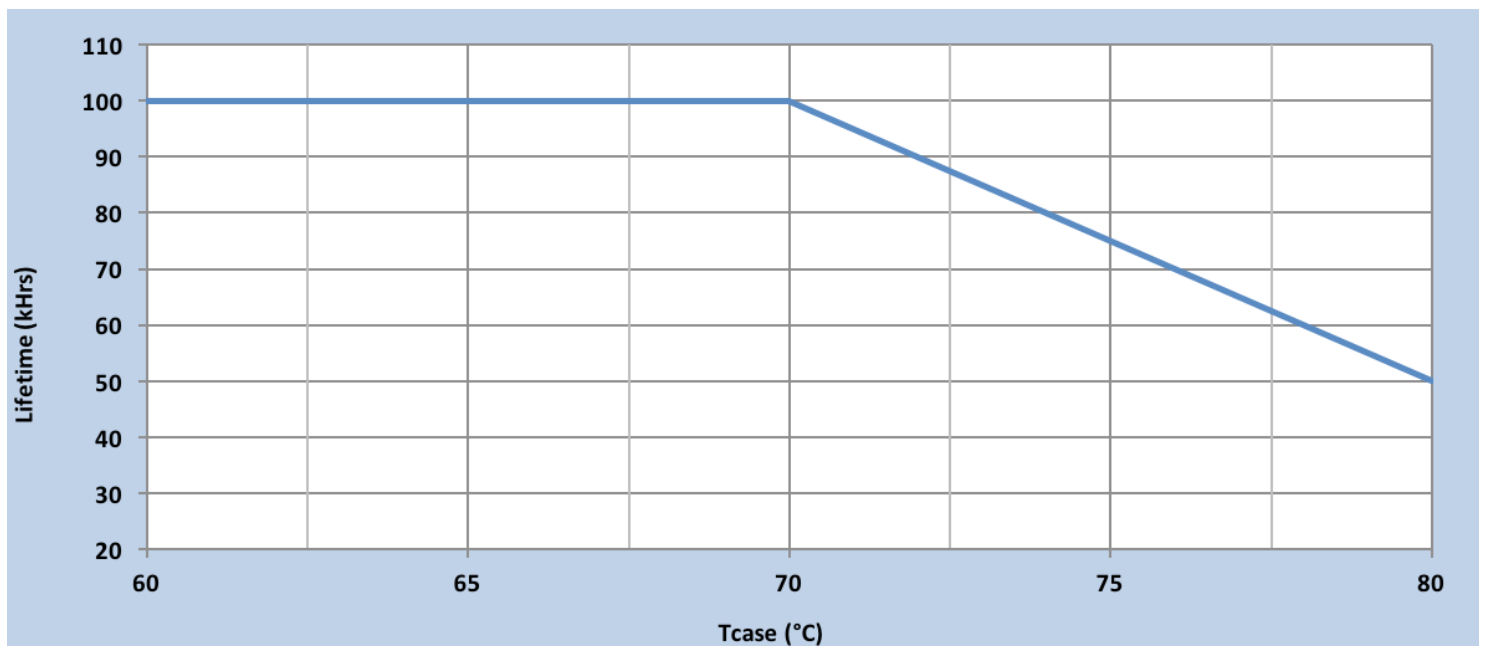

# Xitanium SR 75W 120-277V 0.7A

## Inrush Current Info

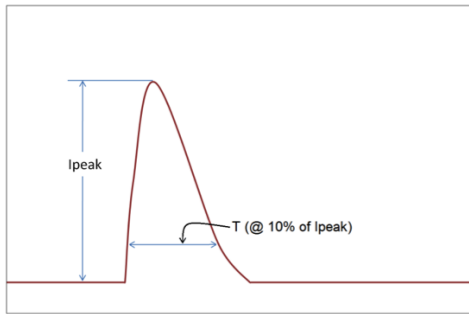

| Vin     | I <sub>peak</sub> | T (@ 10% of I <sub>peak</sub> ) |
|---------|-------------------|---------------------------------|
| 120 Vac | 38A               | 200μs                           |
| 277 Vac | 94A               | 175μs                           |

Inrush current is measured at peak of the corresponding line voltage, source impedance per NEMA 410.

## Lightning Surge Info

| ANSI Surge Type                    | Differential Mode (L-N) | Common Mode (L-G, N-G, L&N-G) |
|------------------------------------|-------------------------|-------------------------------|
| 1.2/50μs Combination Wave (w/t 2Ω) | 6kV                     | 6kV                           |

## Isolation

| Isolation  | Input Leads | Output Leads | SR Leads (SR+, SR-/SGND, AUX, and LSI), Class 2 Only | Enclosure |
|--|-------------|--------------|--|-----------|
| Input Leads  | NA          | 2xU+1kV      | 2xU+1kV  | 2xU+1kV   |
| Output Leads   | 2xU+1kV     | NA           | 2xU+1kV  | 2xU+1kV   |
| SR Leads (SR+, SR-/SGND, AUX, and LSI), Class 2 Only | 2xU+1kV     | 2xU+1kV      | NA   | 2xU+1kV   |
| Enclosure  | 2xU+1kV     | 2xU+1kV      | 2xU+1kV  | NA        |

U = Max. input voltage

© 2017 Philips Lighting Holding B.V. All rights reserved. Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication. [philips.com/leddrivers](http://philips.com/leddrivers)



Philips Lighting North America Corporation  
10275 W. Higgins Road, Rosemont IL 60018  
Tel: 800-322-2086 Fax: 888-423-1882  
Customer/Technical Service: 800-372-3331  
OEM Support: 866-915-5886

Philips Lighting Canada Ltd.  
281 Hillmount Rd, Markham, ON, Canada L6C 2S3  
Tel. 800-668-9008