

B100

EMERGENCY LIGHTING EQUIPMENT

PHILIPS bodine

A Division Of Philips Electronics North America Corporation

Replaces model BDL100

**For Damp locations;
Convenient code compliance;
End-of-lamp-life compatible**

Product Summary

UL LISTED

Factory or Field Installation
(Damp)

Illumination Time

90 Minutes

Initial Light Output

350 - 450 Lumens

Full Warranty

1 Year (NOT pro-rata)

Dual Input Voltage

120/277 VAC, 60 Hz

AC Input Current

280 mA

AC Input Power Rating

2.5 Watts

Test Switch

Single Pole

Battery

High-Temperature,
Maintenance-Free
Nickel-Cadmium Battery
7- to 10-Year Life Expectancy

Batter Charging Current

280 mA

Recharge Time

24 Hours

Charging Indicator Light

LED

Temperature Rating (Ambient)

0°C to +50°C
(32°F to 122°F)
(Damp Location)

0°C to +55°C
(32°F to 131°F)
(Dry Location)

Dimensions

9.4" x 2.4" x 1.5"
(238 mm x 60 mm x 38 mm)
Mounting Center 8.9" (226 mm)

Weight

2.1 lbs. (.95 kg)


Emergency ballasts can be modified to accommodate special voltages, frequencies and longer run times.

CSA Certified model also available.

Specifiers Reference

Project _____ Type _____ Model No. _____

Comments _____

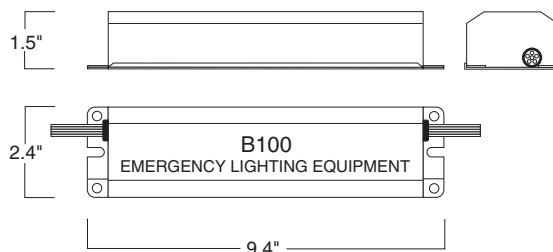

APPLICATION

The B100 emergency ballast works in conjunction with an AC ballast to convert new or existing fluorescent fixtures into emergency lighting. The emergency ballast consists of a high-temperature nickel-cadmium battery, charger and electronic circuitry in one compact red case. The B100 can be used with most 17 - 40 W (2' - 4') T8, T10, T12 or (4-pin) long compact fluorescent lamps without an integral starter, including U-shaped, HO, VHO, circline and energy-saving. It is also compatible with most one-, two-, three- and four-lamp electronic, standard, energy-saving and dimming AC ballasts. If used in an emergency-only fixture, no AC ballast is necessary. The B100 is suitable for indoor and damp locations and for sealed & gasketed fixtures, including fixtures rated for wet locations. It is not suitable for air handling heated air outlets or wet or hazardous locations. For information about specific lamp and ballast compatibility, please call the factory.

OPERATION

When AC power fails, the B100 immediately switches to the emergency mode, operating one lamp at a reduced lumen output for a minimum of 90 minutes. When AC power is restored, the emergency ballast automatically returns to the charging mode and, using a patented circuit, delays AC ballast operation for approximately three seconds to prevent false tripping of the AC ballast end-of-lamp-life shutdown circuits.

INSTALLATION


The B100 does not affect normal fixture operation and may be used with either a switched or unswitched fixture. If a switched fixture is used, an unswitched hot lead must be connected to the emergency ballast. The emergency ballast must be fed from the same branch circuit as the AC ballast. The B100 may be installed inside, on top of or remote from the fixture. The emergency ballast may be remotely installed up to half the distance the AC ballast manufacturer recommends removing the AC ballast from the lamp or up to 50 feet, whichever is less. Installation is not recommended with fixtures where the ambient temperature may fall below 0°C.

UL and CODE COMPLIANCE

The B100 has been tested by Underwriters Laboratories in accordance with the standards set forth in UL 924, "Emergency Lighting and Power Equipment," and is UL Listed for factory or field installation. Emergency illumination time exceeds the National Electrical Code (NEC), Life Safety Code (NFPA-LSC) and UL 90-minute requirements.

L0000071

02/23/12 © Philips Emergency Lighting
P.O. Box 460 Collierville, TN USA 38027-0460
Sales 800-223-5728 FAX 901-853-5009
Tech. Support 888-263-4638
www.philips.com/bodine



B100

EMERGENCY LIGHTING EQUIPMENT

Replaces model BDL100
**For damp locations;
Convenient code compliance;
End-of-lamp-life compatible**

EMERGENCY ILLUMINATION

Depending on the wattage and type of lamp selected, the B100 produces 350 to 450 lumens initial emergency light output. During emergency illumination, one lamp is illuminated, even if installed with a multi-lamp AC ballast. Emergency lumen output will be less with a compact fluorescent lamp.

SPECIFICATION

Emergency lighting shall be provided by using a standard fluorescent fixture equipped with a Philips Bodine B100 emergency ballast. This emergency ballast shall consist of a high-temperature, maintenance-free nickel-cadmium battery, charger and electronic circuitry contained in one 9 3/8" x 2 3/8" x 1 1/2" red metal case. A solid-state charging indicator light to monitor the charger and battery, a single-pole test switch and installation hardware shall be provided. The emergency ballast, using a patented circuit, shall delay AC ballast operation for approximately three seconds to prevent false tripping of AC ballast end-of-lamp-life shutdown circuits. The emergency ballast shall be capable of operating one 17 - 40 W (2' - 4') T8, T10 or T12 or (4-pin) long compact fluorescent lamp at reduced illumination in the emergency mode for a minimum of 90 minutes. It shall be suitable for indoor and damp locations and for sealed & gasketed fixtures, including fixtures rated for wet locations. The B100 shall produce 350 to 450 lumens initial emergency light output, have 3.5 Watts of input power and a 9.6 Watt-hour battery capacity and comply with emergency standards set forth by the current NEC. The emergency ballast shall be UL Listed for installation inside, on top of or remote from the fixture and shall be warranted for a full year from date of purchase.

WARRANTY

Model B100 is warranted for one (1) full year from date of purchase. This warranty covers only properly installed Philips Bodine emergency ballasts used under normal conditions. For the warranty period, Philips Emergency Lighting will, at its option, repair or replace without charge a defective emergency ballast, provided it is returned to the factory transportation prepaid and our inspection determines it to be defective under terms of the warranty. Repair or replacement, as stated above, shall constitute the purchaser's exclusive warranty, which does not extend to transportation, installation, labor or any other charges; nor does it apply to any equipment of another manufacturer used in conjunction with the emergency ballast.

L0000071

02/23/12 © Philips Emergency Lighting
P.O. Box 460 Collierville, TN USA 38027-0460
Sales 800-223-5728 FAX 901-853-5009
Tech. Support 888-263-4638
www.philips.com/bodine

For the most current technical information and notices, please visit TechNotes on our website.