

PHILIPS

Xitanium

LED driver



Datasheet

Xitanium Outdoor LED Drivers Dimmable (1-10V) Independent Xitanium Dim 250W 1.05A 1-10V 230V I220C

LED-based light sources are an excellent solution for outdoor environment. They are long-lasting and require low maintenance. However, to get the best out of the LEDs, these light sources require highly reliable and efficient LED Drivers. Philips Xitanium Dimmable (1-10V) LED Outdoor Drivers are specifically designed to deliver reliable performance and protection while meeting the strict performance, approbation and application requirements.

Benefits

Reliability

- Robust design; capable of withstanding harsh outdoor conditions.
- Long lifetime and high survival rate.
- Superior Surge protection suitable for much more rigorous outdoor application.
- Backed by 5 year warranty from a company you can trust.
- Consistent waterproof performance through the lifecycle.

Affordable

- Component integration in advanced IC enables cost effective design.
- Proven robustness & reliability secure the lowest luminaire maintenance over time.

Easy to use

- Extreme compact size. fitting with varied luminaires.
- Easy to design-in based on the good thermal management and extra EMI margin

Features

- Proven robustness and reliable electronic driver design.
- Achieving highest efficiencies based on advance technology.
- Long lifetime; 50k hrs @Tc max.
- Surge protection; 6kV line-line, 6kV line-earth
- Suitable for Class I isolated luminaires.
- Authorized certificate: ENEC, CB, CE and CCC.

Applications

- Road and street lighting
- Area and flood lighting
- Tunnel lighting
- High-bay lighting

Electrical Input Data

| Specification item | Value | Unit | Condition |
|---------------------------|-----------|------|---------------------------|
| Nominal Input Voltage | 220...240 | Vac | |
| Input Voltage AC | 198...264 | Vac | Performance range |
| Operation Voltage AC | 85...305 | Vac | Safety operation range |
| Nominal Input Frequency | 50...60 | Hz | |
| Input Frequency AC | 47...63 | Hz | Maximum permissible range |
| Nominal Input Current | 0.9...1.2 | A | 220V...240V at full load |
| Maximum Input Current | 1.35 | A | At 198V |
| Nominal Input Power | 265 | W | At 230V at full load |
| Power Factor | ≥0.95 | | At 230V at full load |
| Total Harmonic Distortion | ≤10 | % | At 230V at full load |
| Efficiency | 93 | % | At 230V at full load |

Electrical Output Data


| Specification item | Value | Unit | Condition |
|--------------------------|------------------|-----------------|-----------------------------------|
| Regulation Method | Constant Current | | |
| Output Voltage | 118...238 | V _{dc} | |
| Output Voltage Max | 400 | V _{dc} | Peak voltage at open circuit |
| Output Current | 1050 | mA | Performance voltage range |
| Output Current Tolerance | ±5 | % | At max. output current |
| Output Current Ripple LF | 5 | % | Ripple = peak / average, at <1kHz |
| Output Power | 250 | W | At full load |
| Galvanic Isolation | Yes | | Basic; 2U+1000V |

Electrical Data Control Input

| Specification item | Value | Unit | Condition |
|-------------------------------|--------|------|--------------------------------|
| Control Method | 1-10 | V | |
| Digital Interface | N/A | | According 2.0 specifications |
| Mains Control | N/A | | Can be configured via MultiOne |
| Time-based Integrated Control | N/A | | Can be configured via MultiOne |
| Dimming Range | 10-100 | % | |

Wiring & Connections

| Specification item | Value | Unit | Condition |
|----------------------------|----------|-----------------|---|
| Input Wire Size | 1.0 | mm ² | 3-wire cable; 300V/500V rating or higher |
| Output Wire Size | 1.0 | mm ² | 2-wire cable; 300V/500V rating or higher |
| Input & Output Wire Length | 200 ± 30 | mm | Out of enclosure and not including connector length |
| Control Wire Size | 1.0 | mm ² | 2-wire cable; 300V/500V rating or higher |
| Control Wire Length | 200 ± 30 | mm | Out of enclosure and not including connector length |

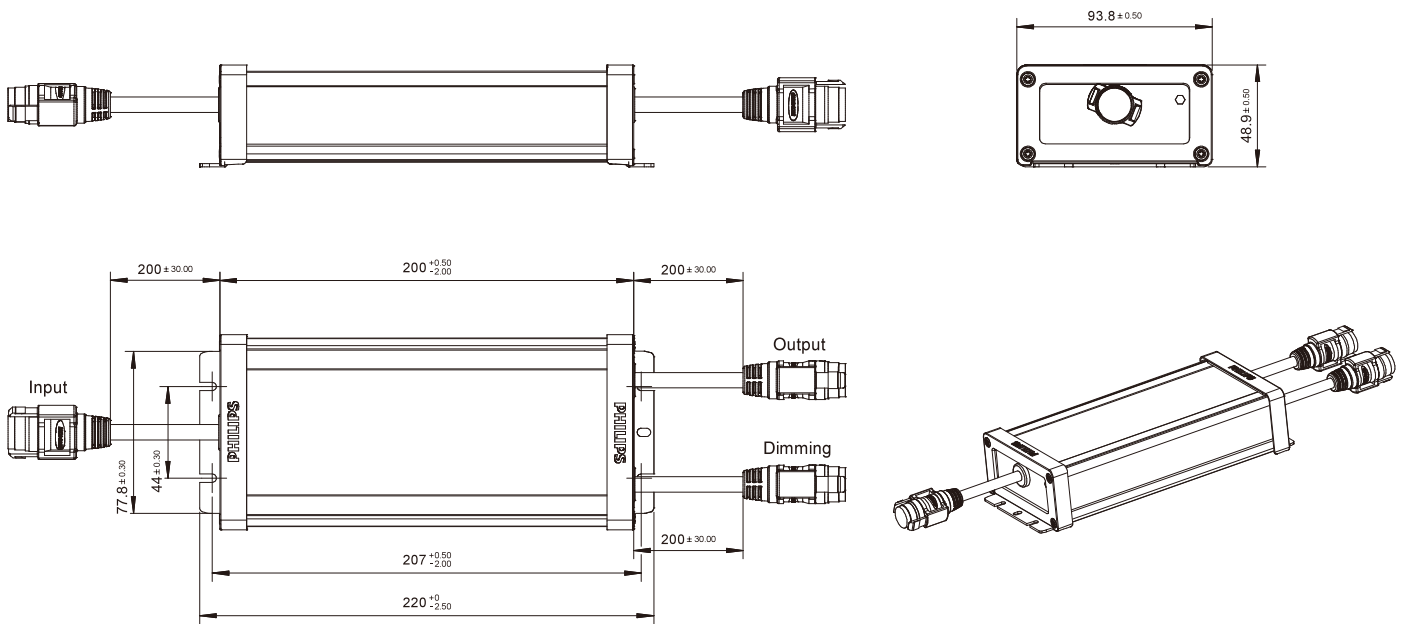

CE Isolation

| | | | |
|--------------------------|-------------|--------------|---------|
| Basicsolation: 2U+1000 V | Input Wires | Output Wires | Chassis |
| Input Wires | N/A | Basic | Basic |
| Output Wires | Basic | N/A | Basic |
| Chassis | Basic | Basic | N/A |

Operational Temperature and Humidity

| Specification item | Value | Unit | Condition |
|---------------------------|-----------|------|-----------------------------------|
| Ambient Temperature | -40...+55 | °C | |
| T _{case} Maximum | 80 | °C | Measured at T _c -point |
| T _{case} Life | 70 | °C | Measured at T _c -point |
| T _{case} Cut-Off | 90 | °C | Power to LEDs is reduced |

Storage Temperature and Humidity

| Specification item | Value | Unit | Condition |
|---------------------|-----------|------|-----------|
| Ambient Temperature | -40...+55 | °C | |

Lifetime

| Specification item | Value | Unit | Condition |
|--------------------|---------|-------|--|
| Lifetime | 100,000 | Hours | At T _{case} Life; Survival rate = 90% |

Programmable Features

| Specification item | Value | Remark | Condition |
|---------------------------------------|-------|--------|---------------------|
| Adjustable Output Current (AOC) | N/A | | See Design-In Guide |
| LED Module Temperature Derating (MTP) | N/A | | |
| Constant Lumen Output (CLO) | N/A | | |
| DC Emergency Dimming (DCEmDIM) | N/A | | |
| Corridor Mode | N/A | | |
| Energy Metering | N/A | | |
| Diagnostics | N/A | | |

Features


| Specification item | Value | Remark | Condition |
|---|---------|----------|-----------------------------|
| Over Temperature Protection | Yes | Dim Down | Automatic Recovery |
| Open Circuit Protection | Yes | | Automatic Recovery |
| Short Circuit Protection | Yes | | Automatic Recovery |
| Over Power Protection | Yes | | |
| Hot Wiring | N/A | | |
| Suitable for fixtures with Protection Class | Class I | | |
| Input over-voltage | Yes | | 320Vac@48hrs 350Vac@2hrs |

Certificates and Standards

| Specification item | Value |
|---------------------------|----------------------|
| Approval Marks | CE / CCC / ENEC / CB |
| Ingress Protection Rating | IP67 |

Inrush current

| Specification item | Value | Unit | Condition |
|----------------------------|-------|------|----------------------------------|
| Inrush Current Ipeak | 38.3 | A | At 230Vac |
| Inrush Current Twidth | 625 | μs | At 230Vac, measured at 50% Ipeak |
| Drivers per MCB 16A Type B | 6 | pcs | |

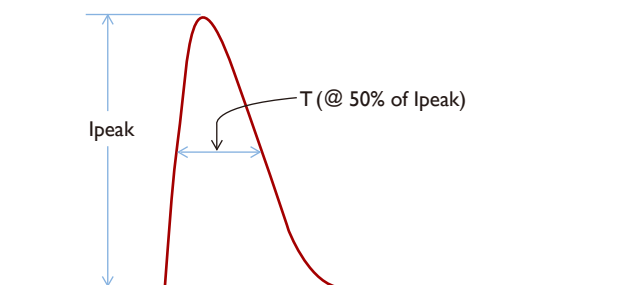

Earth Leakage Current

| Specification item | Value | Unit | Condition |
|-------------------------|-------|------|---|
| Typical Leakage Current | ≤0.7 | mApk | Meets IEC60598; LED module not included |

Surge Capability

| Specification item | Value | Unit | Condition |
|--|-------|------|----------------|
| Mains Surge Capability Differential Mode | 6 | KV | L-N, 20hm |
| Mains Surge Capability Common Mode | 6 | KV | L/N-GND, 120hm |

Dimensions


| Specification item | Value | Unit | Condition |
|-------------------------|-------|------|---------------------------------------|
| Length overall | 220 | mm | |
| Width overall | 93.8 | mm | |
| Height overall | 48.6 | mm | |
| Mounting Holes Distance | 207 | mm | |
| Mounting Holes Width | 44 | mm | |
| Mounting Holes Size | 4 | mm | For M4 with max head diameter of 10mm |
| Weight | 1305 | g | |

Logistical Data


| Specification item | Value |
|---------------------|--|
| Product Name | Xitanium Dim 250W 1.05A 1-10V 230V I220C |
| Logistics Code 12NC | 9290 014 04180 |
| Pieces per Box | 6 |

Graphs


Operating window

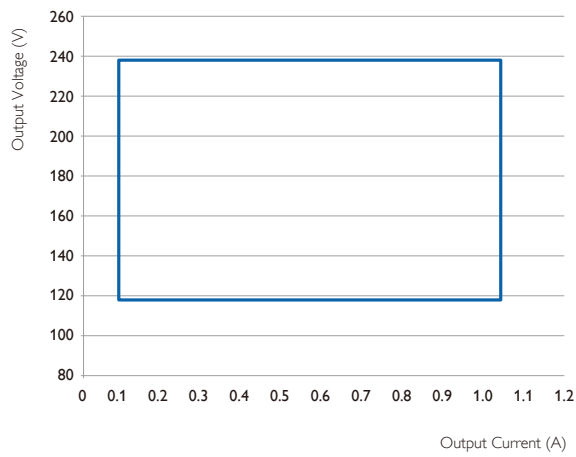


Efficiency versus output power

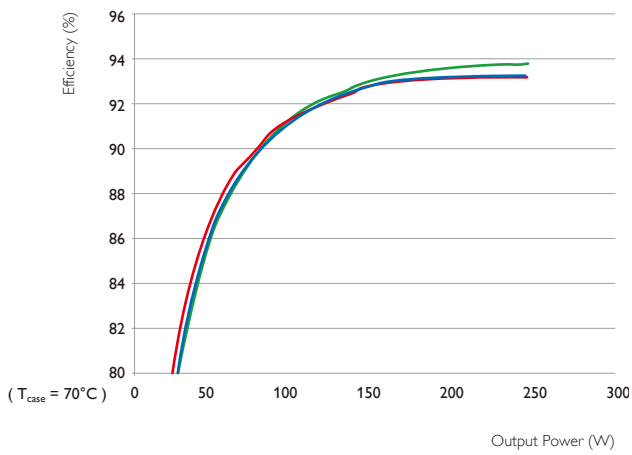


Power factor versus output power

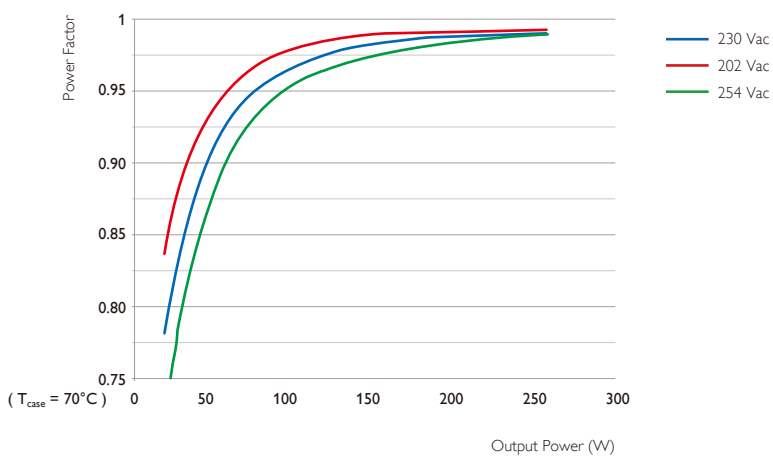

Total Harmonic Distortion (Tcase = 70°C)

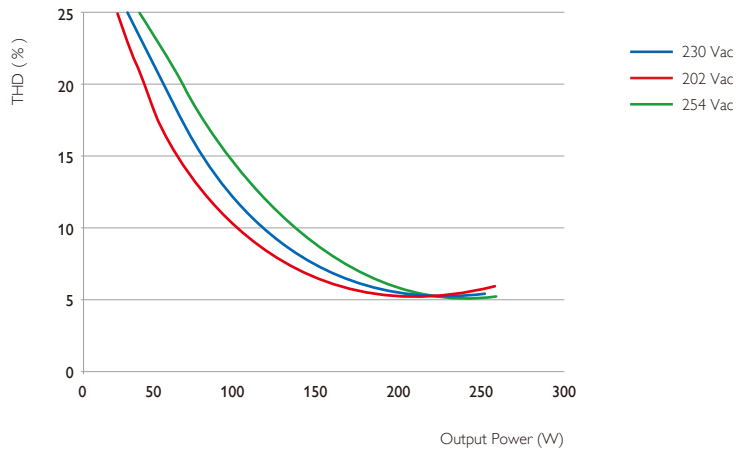


Lifetime vs Tcase

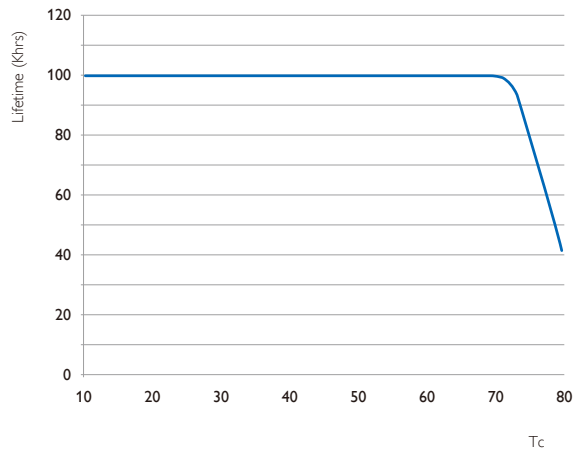


- Failure rate information based upon MTTF modeling: 90% survival at end of life @ Tcase ≤ 80°C
- Failure rate information based upon field call rate data: <0.01% per 1K hour @ Tcase ≤ 80°C

1-10V dimming Curve

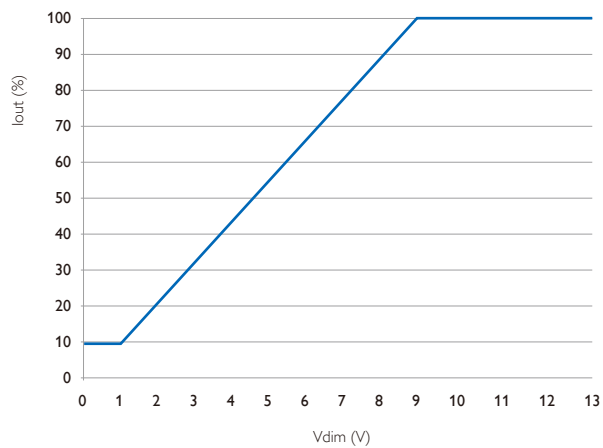

250W Vin vs Pout

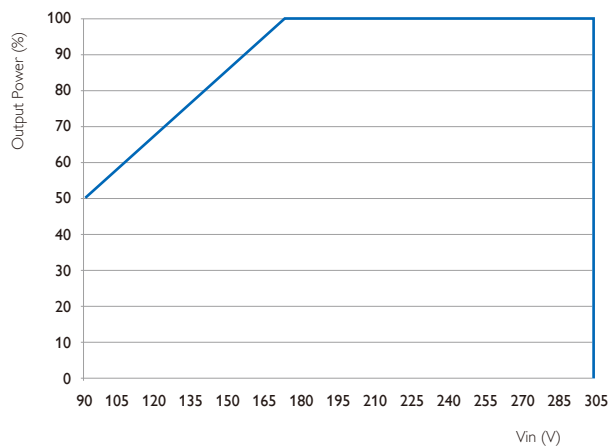

©2015 Koninklijke Philips Electronics N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights. Data subject to change.

Date of release: October 13, 2015

www.philips.com/technology