


1 x TLED 16W 6500K 240D 9290012769

1 x 1600 lm

Polar intensity diagram




Light output ratio 1.00  
 Service upward 0.27  
 Service downward 0.73

CIE flux code 36 64 85 73 100

UGRcen (4Hx8H, 0.25H) 23

Quantity estimation diagram

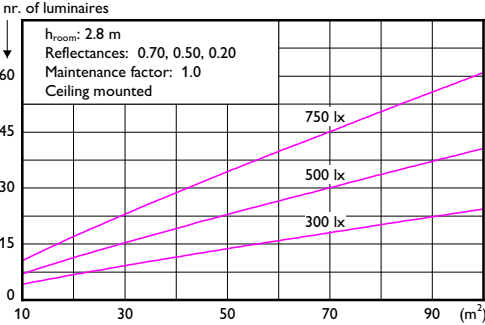


Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)												
	0.80			0.70			0.50			0.30			0.00
	0.80	0.50	0.30	0.80	0.50	0.30	0.80	0.50	0.30	0.80	0.50	0.30	0.00
0.60	0.40	0.38	0.38	0.37	0.36	0.29	0.27	0.22	0.25	0.21	0.17		
0.80	0.50	0.47	0.47	0.46	0.44	0.37	0.34	0.29	0.31	0.27	0.22		
1.00	0.58	0.53	0.54	0.53	0.51	0.43	0.40	0.35	0.36	0.32	0.27		
1.25	0.65	0.60	0.62	0.59	0.57	0.50	0.46	0.41	0.42	0.38	0.31		
1.50	0.72	0.65	0.67	0.65	0.62	0.55	0.50	0.45	0.46	0.42	0.35		
2.00	0.81	0.72	0.76	0.72	0.69	0.63	0.57	0.53	0.52	0.49	0.41		
2.50	0.87	0.77	0.82	0.78	0.74	0.68	0.62	0.58	0.57	0.54	0.46		
3.00	0.92	0.81	0.86	0.81	0.77	0.72	0.66	0.62	0.60	0.57	0.49		
4.00	0.98	0.85	0.92	0.86	0.81	0.77	0.71	0.67	0.65	0.62	0.53		
5.00	1.02	0.88	0.96	0.90	0.84	0.80	0.74	0.71	0.68	0.65	0.56		

Ceiling mounted

UGR diagram

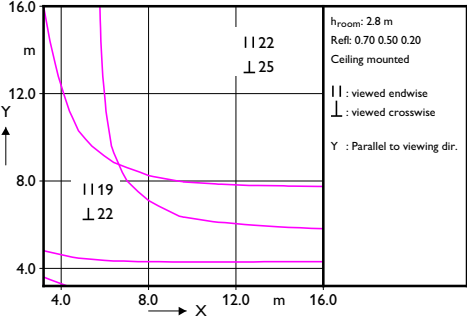

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	5497	5468	5447	5494	5709	6300	7667
50.0	5311	5269	5223	5226	5379	5902	7379
55.0	5150	5102	5024	4976	5037	5471	7030
60.0	5020	4960	4865	4765	4728	5027	6648
65.0	4914	4859	4730	4576	4434	4559	6157
70.0	4839	4789	4637	4438	4198	4074	5561
75.0	4821	4766	4599	4375	4019	3590	4802
80.0	4840	4774	4628	4366	3914	3130	3663
85.0	4879	4794	4662	4420	3894	2819	2103
90.0	4958	4875	4734	4500	4016	2835	1531

(cd/m²)