

As easy as 1,2,3...



MARK 10 POWERLINE DIMMABLE BALLASTS FOR T8 LAMPS



Philips Advance Mark 10 Powerline Dimmable Ballasts make converting your existing fixtures easy. For companies looking to make their fixed-output linear T8 fluorescent systems more cost effective and sustainable, Mark 10 Powerline ballasts provide an easy solution without the need for additional control leads. Simply replace the ballast, replace the switch and dim the lights.

Features

- Full range continuous dimming (100% light output down to 5%)
- NEMA Premium

Benefits

- Compatible with controls from numerous manufacturers using standard *Powerline* controls
- Ideal for frequent switching applications such as occupancy sensors and daylight harvesting – programmed start operation

Applications

- Ideal for conference rooms, auditoriums, educational facilities, hotels, restaurants, and department stores as well as other new construction or retrofit installations where dimming is desired.

(¥, ‡ See page 2 for footnote)

PHILIPS
ADVANCE

MARK 10 POWERLINE DIMMABLE BALLASTS FOR T8 LAMPS

Mark 10 Powerline Ballasts For 17 - 32W T8 Lamps

Programmed Start

No. of Lamps	Input Volts	Catalog Number	Max/Min		Full Light Output		Minimum Starting Temp (°F/°C)	Dim.	Wiring Diagram
			Input Power ANSI (Watts)	Ballast Factor	THD %	Line Current (Amps)			
F17T8, FBO16T8 (17W)									
1	120	REZ-132-SC	24/7	1.05/0.05	10	0.20	50/10	B	152
1	277	VEZ-132-SC	24/7	1.05/0.05	10	0.09	50/10	B	152
2	120	REZ-132-SC	38/13	1.05/0.05	10	0.32	50/10	B	153
2	277	VEZ-132-SC	38/13	1.05/0.05	10	0.14	50/10	B	153
3	120	REZ-132-SC	56/18	1.05/0.05	10	0.47	50/10	B	155
3	277	VEZ-132-SC	56/18	1.05/0.05	10	0.21	50/10	B	155
F25T8, FBO24T8 (3' 25W)									
1	120	REZ-132-SC	30/7	1.05/0.05	10	0.26	50/10	B	152
1	277	VEZ-132-SC	30/7	1.05/0.05	10	0.11	50/10	B	152
2	120	REZ-132-SC	55/13	1.05/0.05	10	0.46	50/10	B	153
2	277	VEZ-132-SC	55/13	1.05/0.05	10	0.20	50/10	B	153
3	120	REZ-132-SC	79/19	1.05/0.05	10	0.66	50/10	B	155
3	277	VEZ-132-SC	79/19	1.05/0.05	10	0.29	50/10	B	155
F32T8, FBO31T8, F32T8/U6 (32W)									
1	120	REZ-132-SC	35/9	1.00/0.05	10	0.29	50/10	B	152
1	277	VEZ-132-SC	35/9	1.00/0.05	10	0.13	50/10	B	152
2	120	REZ-132-SC	68/15	1.00/0.05	10	0.57	50/10	B	153
2	277	VEZ-132-SC	68/15	1.00/0.05	10	0.25	50/10	B	153
3	120	REZ-132-SC	96/20	0.97/0.05	10	0.82	50/10	B	155
3	277	VEZ-132-SC	96/20	0.97/0.05	10	0.35	50/10	B	155

Ballasts utilizing poke-in connectors can accept wire gauges from AWG 16 - 20.

Some lamp manufacturers recommend burning in new lamps 100 hours at full light output prior to dimming. Consult lamp manufacturer.

¥ As a licensee in the NEMA Premium Ballast Program, Philips Lighting Company has determined that these products meet the NEMA Premium specification for premium energy efficiency.


‡ Restrictions on Hazardous Substances (RoHS) is a European directive (2002/95/EC) designed to limit the content of 6 substances [lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB), and polybrominated diphenyl ethers (PBDE)] in electrical and electronic products. For products used in North America compliance to RoHS is voluntary and self-certified.

MARK 10 POWERLINE DIMMABLE BALLASTS FOR T8 LAMPS

Dimensions

Figure	A	B	C	D
B	1.18"	1.70"	8.90"	9.50"

Figure B

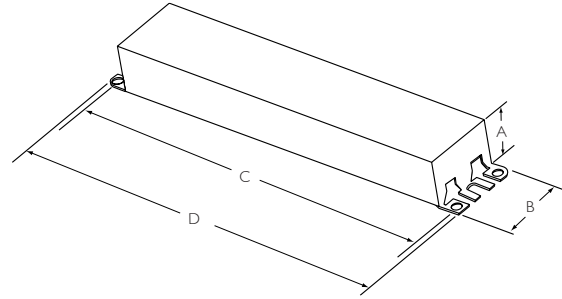

Wiring Diagrams

Diagram 152

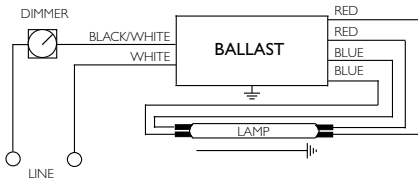


Diagram 153


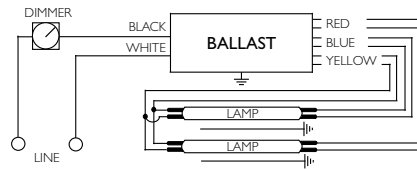


Diagram 155

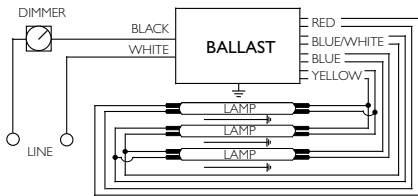

MARK 10 POWERLINE DIMMABLE BALLASTS FOR T8 LAMPS

Ballast Specification

Section I - Physical Characteristics

- 1.1 Ballast shall be physically interchangeable with standard electromagnetic or standard electronic ballasts where applicable.
- 1.2 Ballast shall be available in a plastic/metal can or all metal can construction to meet all plenum requirements.
- 1.3 Ballast shall be provided with poke-in wire trap connectors or integral leads color coded per ANSI C82.11.

Section II - Performance Requirements

- 2.1 Ballast shall be Programmed Start.
- 2.2 Ballast shall contain auto restart circuitry in order to restart lamps without resetting power.
- 2.3 Ballast shall operate from 60 Hz input source of 120V or 277V or 120V through 277V as applicable with sustained variations of +/- 10% (voltage and frequency).
- 2.4 Ballast shall be high frequency electronic type and operate lamps at a frequency above 42 kHz to avoid interference with infrared devices and eliminate visible flicker.
- 2.5 Ballast shall have a Power Factor greater than 0.98 at full light output.
- 2.6 Ballast shall have a minimum ballast factor of 1.00 at maximum light output and 0.05 at minimum light output for primary lamp application.
- 2.7 Ballast shall provide for a Lamp Current Crest Factor of 1.7 or less.
- 2.8 Ballast input current shall have Total Harmonic Distortion (THD) of less than 10% at maximum light output when operated at nominal line voltage with primary lamp. Total Harmonic Current (THC) at minimum light output shall not exceed THC at maximum light output.
- 2.9 Ballast shall have a Class A sound rating.
- 2.10 Ballast shall have a minimum starting temperature of 10° C (50° F) for primary lamp.
- 2.11 Ballast shall control lamp light output from 100% - 5% relative light output for T8.
- 2.12 Ballast shall ignite the lamps at any light output setting without first going to another output setting.
- 2.13 Ballast shall tolerate sustained open circuit and short circuit output conditions.

Section III - Regulatory Requirements

- 3.1 Ballast shall not contain any Polychlorinated Biphenyl (PCB).
- 3.2 Ballast shall be Underwriters Laboratories (UL) listed, Class P and Type I Outdoor; and Canadian Standards Association (CSA) certified where applicable.
- 3.3 Ballast shall comply with ANSI C62.41 Category A for Transient protection.
- 3.4 Ballast shall comply with ANSI C82.11 where applicable.
- 3.5 Ballast shall comply with the requirements of the Federal Communications Commission (FCC) rules and regulations, Title 47 CFR part 18, Non-Consumer (Class A) for EMI/RFI (conducted and radiated).
- 3.6 Ballast shall comply with NEMA 410 for in-rush current limits.

Section IV - Other

- 4.1 Ballast shall be manufactured in a factory certified to ISO 9001 Quality System Standards.
- 4.2 Ballast shall carry a five-year limited warranty from date of manufacture against defects in material or workmanship for operation at a maximum case temperature of 70°C.
- 4.3 Manufacturer shall have a twenty-year history of producing electronic ballasts for the North American market.
- 4.4 Ballast shall be controlled by a compatible Mark 10 Powerline two-wire dimmer. When input voltage to dimmer is 120V, control voltage at the ballast (from the dimmer) shall be 120V at full light output and 56V at minimum light output. When input voltage to dimmer is 277V, control voltage at the ballast (from the dimmer) shall be 277V at full light output and 129V at minimum light output.
- 4.5 Ballast shall be Philips Advance part # _____ or approved equal.



© 2013 Koninklijke Philips N.V.
All rights reserved.
Specifications are subject to change without notice.

EL-2020-A 09/13

Philips Lighting Company
A Division of Philips North America
10275 W. Higgins Road
Rosemont, IL 60018
Tel: 800-322-2086
Fax: 888-423-1882
Customer Support/Customer
Care: 800-372-3331

Philips Lighting Company
A Division of Philips Canada
281 Hillmount Road
Markham ON, Canada L6C 2S3
Phone: 800-668-9008