




High Pressure Sodium Lamp Ballast

Catalog Number 71A8088
For 100W S54
60 Hz CWA
Status: Active

DIMENSIONS AND DATA

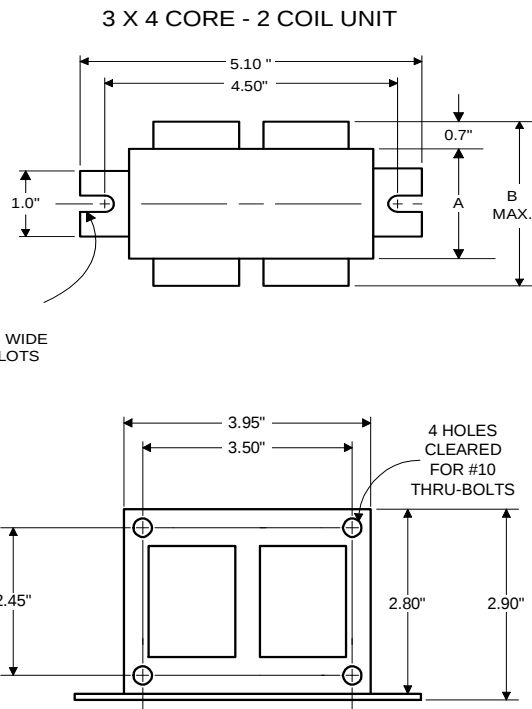


INPUT VOLTS	120	277			
CIRCUIT TYPE	CWA				
POWER FACTOR (min)	90%				
REGULATION					
Line Volts	±10%				
Lamp Watts	WITHIN TRAPEZOID				
LINE CURRENT (Amps)					
Operating.....	1.15	0.50			
Open Circuit.....	0.65	0.25			
Starting.....	0.80	0.35			
UL TEMPERATURE RATINGS					
Insulation Class	H(180°C)				
Coil Temperature Code	1029				
MIN. AMBIENT STARTING TEMP.	-40°F or -40°C				
NOM. OPEN CIRCUIT VOLTAGE	115				
INPUT VOLTAGE AT LAMP DROPOUT.....	90	208			
INPUT WATTS	138				
RECOMMENDED FUSE (Amps).....	3	2			
CORE and COIL					
Dimension (A)	2.00				
Dimension (B)	3.30				
Weight (lbs.)	7.5				
Lead Lengths	12"				
CAPACITOR REQUIREMENT					
Microfarads	34.0				
Volts (min.)	170				
Fault Current Withstand (amps)					
60 Hz TEST PROCEDURES (Refer to Advance Test Procedure for HID Ballasts - Form 1270)					
High Potential Test (Volts)					
1 minute	2000				
2 seconds	2500				
Open Circuit Voltage Test (Volts)	105-125				
Short-Circuit Current Test (Amps)					
Secondary Current	2.85-3.10				
Input Current.....	0.50-0.80	0.20-0.35	-	-	-

Capacitor: 7C340P24



Capacitance: 34
Dia/Oval Dim: 1.75
Height: 3.75
Temp Rating: 105°C

Wiring Diagram:

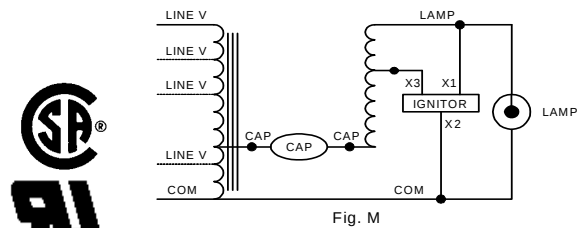

Ignitor: LI551-J4



Ballast to Lamp Distance
(BTL) = 5 feet
Temp Rating: 105°C

Ordering Information

Order Suffix

Description

Data is based upon tests performed by Advance Transformer in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

ADVANCE TRANSFORMER CO.

O'HARE INTERNATIONAL CENTER · 10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Customer Support/Technical Service: Phone: 800-372-3331 · Fax: 847-768-7768
Corporate Offices: Phone: 800-322-2086

07/10/97