

Intelligent Control



ROVR (DALI) DIMMABLE BALLASTS FOR CFL LAMPS



Philips Advance ROVR Ballasts provide intelligent control through the DALI Protocol. They reflect the latest approach to controlling fluorescent lighting. Rather than simply responding to instructions from control components, ROVR ballasts enable two-way communication, and have the ability to dim and switch individual ballasts through the control signal. These features allow for virtually unlimited design flexibility while creating sustainable lighting systems. This two-way communication is made possible through the industry-standard digital communication protocol known as DALI (Digital Addressable Lighting Interface).

Features

- Digital control protocol
- Full range continuous dimming (100% light output down to 3%)
- Programmed start operation

Benefits

- Ideal for frequent switching applications such as occupancy sensors and daylight harvesting
- Compatible with controls from numerous manufacturers offering standard DALI controls

Applications

- Ideal for conference rooms, auditoriums, educational facilities, hotels, restaurants, and department stores as well as other new construction or retrofit installations where dimming is desired.

(‡ See page 2 for footnote)

PHILIPS
ADVANCE

ROVR (DALI) DIMMABLE BALLASTS FOR CFL LAMPS

ROVR Ballasts For 13-70W T4 Lamps

Programmed Start

No. of Lamps	Input Volts	Catalog Number	Max/Min		Full Light Output		Minimum Starting Temp (°F/°C)	Dim.	Wiring Diagram
			Input Power ANSI (Watts)	Ballast Factor	THD %	Line Current (Amps)			
CFQ13W/G24q - 13W CFL Quad Tube Lamp (PL-CI3W/4P, F13DBX/4P, CF13DD/E)									
CFTR13W/GX24q - 13W CFL Triple Tube Lamp (F13TBX/4P, CF13DT/E)									
1	120	IDL-2S26-M5-BS	18/6	1.00/0.03	10	0.15-0.07	50/10	Size 5	I65
1	120	IDL-2S26-M5-LD	18/6	1.00/0.03	10	0.15-0.07	50/10	Size 5	I65
2	277	IDL-2S26-M5-BS	33/19	1.00/0.03	10	0.28-0.12	50/10	Size 5	I65
2	277	IDL-2S26-M5-LD	33/19	1.00/0.03	10	0.28-0.12	50/10	Size 5	I65
CFQ18W/G24q - 18W CFL Quad Tube Lamp (PL-CI8W/4P, F18DBX/4P, CF18DD/E)									
CFTR18W/GX24q - 18W CFL Triple Tube Lamp (PL-TI8W, F18TBX/4P, CF18DT/E)									
1	120	IDL-2S26-M5-BS	23/7	1.00/0.03	10	0.19-0.09	50/10	Size 5	I65
1	120	IDL-2S26-M5-LD	23/7	1.00/0.03	10	0.19-0.09	50/10	Size 5	I65
2	277	IDL-2S26-M5-BS	41/11	1.00/0.03	10	0.34-0.15	50/10	Size 5	I65
2	277	IDL-2S26-M5-LD	41/11	1.00/0.03	10	0.34-0.15	50/10	Size 5	I65
CFQ26W/G24q - 26W CFL Quad Tube Lamp (PL-C26W/4P, F26DBX/4P, CF26DD/E)									
CFTR26W/GX24q - 26W CFL Triple Tube Lamp (PL-T26W, F26TBX/4P, CF26DT/E)									
1	120	IDL-2S26-M5-BS	30/8	1.00/0.03	10	0.25-0.11	50/10	Size 5	I65
1	120	IDL-2S26-M5-LD	30/8	1.00/0.03	10	0.25-0.11	50/10	Size 5	I65
2	277	IDL-2S26-M5-BS	55/13	1.00/0.03	10	0.46-0.20	50/10	Size 5	I65
2	277	IDL-2S26-M5-LD	55/13	1.00/0.03	10	0.46-0.20	50/10	Size 5	I65
CFTR32W/GX24q - 32W CFL Triple Tube Lamp (PL-T32W, F32TBX/4P, CF32DT/E)									
1	120	IDL-2S26-M5-BS	36/9	1.00/0.03	10	0.30-0.13	50/10	Size 5	I65
1	120	IDL-2S26-M5-LD	36/9	1.00/0.03	10	0.30-0.13	50/10	Size 5	I65
2	277	IDL-2T42-M5-BS	75/19	1.00/0.03	10	0.63-0.21	50/10	Size 5	I65
2	277	IDL-2T42-M5-LD	75/19	1.00/0.03	10	0.63-0.21	50/10	Size 5	I65
CFTR42W/GX24q - 42W CFL Triple Tube Lamp (PL-T42W, F42TBX/4P, CF42DT/E)									
1	120	IDL-2S26-M5-BS	47/9	1.00/0.03	10	0.39-0.17	50/10	Size 5	I65
1	120	IDL-2S26-M5-LD	47/9	1.00/0.03	10	0.39-0.17	50/10	Size 5	I65
2	277	IDL-2T42-M5-BS	98/18	1.00/0.03	10	0.82-0.36	50/10	Size 5	I65
2	277	IDL-2T42-M5-LD	98/18	1.00/0.03	10	0.39-0.17	50/10	Size 5	I65
CFTR57W/GX24q - 57W CFL Triple Tube Lamp (PL-T57W, F57QBX/4P, CF57DT/E)									
1	120	IDL-2T42-M5-BS	65/16	1.00/0.03	10	0.55-0.24	50/10	Size 5	I65
1	120	IDL-2T42-M5-LD	65/16	1.00/0.03	10	0.55-0.24	50/10	Size 5	I65
CFTR70W/GX24q - 70W CFL Triple Tube Lamp (F70QBX/4P, CF70DT/E)									
1	120	IDL-2T42-M5-BS	75/16	1.00/0.03	10	0.63-0.27	50/10	Size 5	I65
1	120	IDL-2T42-M5-LD	75/16	1.00/0.03	10	0.63-0.27	50/10	Size 5	I65

Ballasts utilizing poke-in connectors can accept wire gauges from AWG 16 - 20.

Some lamp manufacturers recommend burning in new lamps 100 hours at full light output prior to dimming. Consult lamp manufacturer.

ROVR Ballasts For 55W FT5 Lamps

Programmed Start

No. of Lamps	Input Volts	Catalog Number	Max/Min		Full Light Output		Minimum Starting Temp (°F/°C)	Dim.	Wiring Diagram
			Input Power ANSI (Watts)	Ballast Factor	THD %	Line Current (Amps)			
FT55W/2G11 - 55W Long Twin Tube Lamp (PL-L55W, F55BX, FT55DL)									
1	120-277	IDA-154	59/13	0.90/0.03	10	0.50-0.22	50/10	D	58B
2	120-277	IDA-2554	114/24	0.90/0.03	10	0.96-0.42	50/10	D	59B

Ballasts utilizing poke-in connectors can accept wire gauges from AWG 16 - 20.

Some lamp manufacturers recommend burning in new lamps 100 hours at full light output prior to dimming. Consult lamp manufacturer.

‡ Restrictions on Hazardous Substances (RoHS) is a European directive (2002/95/EC) designed to limit the content of 6 substances [lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB), and polybrominated diphenyl ethers (PBDE)] in electrical and electronic products. For products used in North America compliance to RoHS is voluntary and self-certified.

ROVR (DALI) DIMMABLE BALLASTS FOR CFL LAMPS

Dimensions

Figure	A	B	C	D	E
D	1.00"	1.18"	16.34"	16.70"	
5 - BS	1.18"	3.00"	4.20"	4.55"	2.00"
5 - LD	1.18"	3.00"	4.20"	4.55"	

Figure D - Includes connectors with no leads

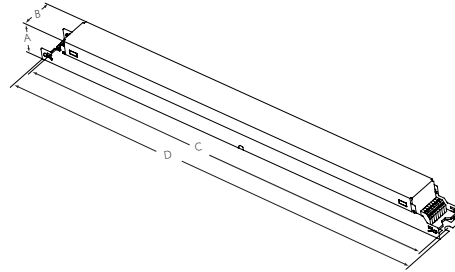


Figure 5 - BS


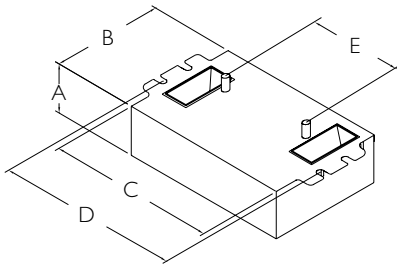


Figure 5 - LD

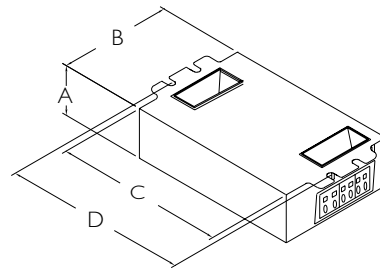

Wiring Diagrams

Diagram 58B

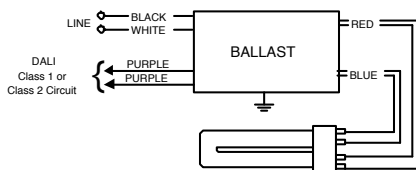


Diagram 59B


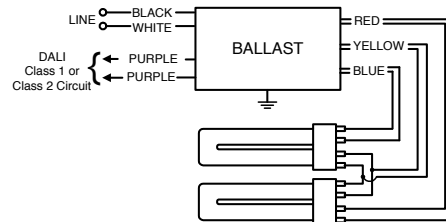


Diagram 165

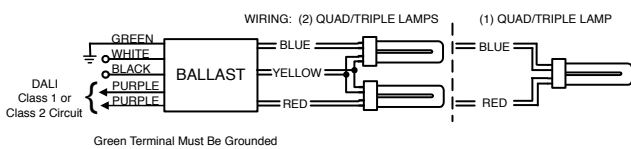

Ballast Specification

Section I - Physical Characteristics

- 1.1 Ballast shall be physically interchangeable with standard electromagnetic or standard electronic ballasts, where applicable.
- 1.2 Ballast shall be available in a plastic/metal can or all metal can construction to meet all plenum requirements.
- 1.3 Ballast shall be provided with poke-in wire trap connectors or integral leads color coded per ANSI C82.11.

Section II - Performance Requirements

- 2.1 Ballast shall be Programmed Start.
- 2.2 Ballast shall be provided with integral protection circuitry to withstand connection of low voltage control leads to mains power supply. In this event, ballast shall default to maximum light output.
- 2.3 Ballast shall contain auto restart circuitry in order to restart lamps without resetting power.
- 2.4 Ballast shall operate from 50/60Hz input source of 120V through 277V with sustained variations of +/-10% (voltage and frequency) with no damage to the ballast.
- 2.5 Ballast shall be high frequency electronic type and operate lamps at a frequency above 42 kHz to avoid interference with infrared devices and eliminate visible flicker.
- 2.6 Ballast shall have a Power Factor greater than 0.98 at full light output and greater than 0.90 throughout the dimming range for primary lamp.
- 2.7 Ballast shall have a minimum ballast factor of 1.00 at maximum light output and 0.03 at minimum light output for primary lamp.
- 2.8 Ballast shall provide for a Lamp Current Crest Factor of 1.7 or less throughout the dimming range in accordance with lamp manufacturer recommendations.
- 2.9 Ballast input current shall have Total Harmonic Distortion (THD) of less than 10% when operated at nominal line voltage with primary lamp.
- 2.10 Ballast shall have a Class A sound rating.
- 2.11 Ballast shall have a minimum starting temperature of 10°C (50°F) for primary lamp.
- 2.12 Ballast shall control lamp light output from 100% – 3% relative light output for Compact Fluorescent Lamps.
- 2.13 Ballast shall ignite the lamps at any light output setting without first going to another output setting.
- 2.14 Ballast shall tolerate sustained open circuit and short circuit output conditions.
- 2.15 Ballast shall provide Lamp EOL Protection Circuit for CFL lamps.

Section III - Regulatory Requirements

- 3.1 Ballast shall not contain any Polychlorinated Biphenyl (PCB).
- 3.2 Ballast shall be Underwriters Laboratories (UL) listed, Class P and Type I Outdoor; and Canadian Standards Association (CSA) certified where applicable.
- 3.3 Ballast shall comply with ANSI C62.41 Category A for Transient protection.
- 3.4 Ballast shall comply with ANSI C82.11 where applicable.
- 3.5 Ballast shall comply with the requirements of the Federal Communications Commission (FCC) rules and regulations, Title 47 CFR part 18, Non-Consumer (Class A) for EMI/RFI (conducted and radiated).
- 3.6 Ballast shall comply with NEMA 410 for in-rush current limits.

Section IV - Other

- 4.1 Ballast shall be manufactured in a factory certified to ISO 9002 Quality System Standards.
- 4.2 Ballast shall carry a _____ year limited warranty from date of manufacture against defects in material or workmanship for operation at a maximum case temperature of _____ (Go to our web site for up-to- date warranty information: www.philips.com/advancewarranty).
- 4.3 Manufacturer shall have a twenty-year history of producing electronic ballasts for the North American market.
- 4.4 Ballast shall be controlled by a Class 1 or Class 2 low voltage DALI controller.
- 4.5 Ballast shall be Philips Advance part # _____ or approved equal.

