

PHILIPS
bodine

Emergency Drivers

LED

BSL310



Project: _____
Type: _____
Model No: _____ Qty: _____
Date: _____
Notes: _____

Emergency driver for LED strips
Class 2 output
10 Watts output power

Product order number: BSL3102WM (Polycarbonate case)
See back page for additional model configurations

Specifications

UL Classified

Listed to UL924 and tested to CSA 22.2, No. 141
For Field or Factory Installation
(Indoor and Damp)

UL Component Recognized

For Factory Installation
(Indoor and Damp)

Illumination Time

90 Minutes

Full Warranty

5 Years (NOT pro-rata)

Universal Input Voltage

120-277 VAC, 50/60 Hz

AC Input Power Rating

4.0 W (Maximum)

Output Voltage

15 - 50 VDC

Output Power

10.4 W (Maximum)

Test Switch/Charging Indicator Light

Illuminated Test Switch

Battery

High-Temperature, Maintenance-Free
Nickel-Cadmium Battery
7- to 10-Year Life Expectancy

Recharge Time

24 Hours

Temperature Rating (Ambient)

0°C to +55°C (32°F to 131°F)

Dimensions (BSL310)

14.5" x 2.25" x 1.18" (369 mm x 58 mm x 30 mm)
Mounting Center 14.0" (356 mm)

Weight


2.25 lbs. (1.0 kg) - polycarbonate

Benefits:

- Smart Charger Technology for low energy consumption
- Meets CEC Title 20 (California Energy Commission) efficiency standards
- Class 2 output - UL 1310 Certified, CSA 22.2 No 223-M91 compliant
- Emergency mode lumen output of up to 1300 lumens
- Universal input (120-277 VAC)
- 2 wire input reduces wiring errors
- Compatible with a variety of LED strip manufacturers
- Compatible with AC drivers and LED loads rated for Class 2
- RoHS compliant

Dimensions

14.5" x 2.25" x 1.18" (mounting center - 14.0")

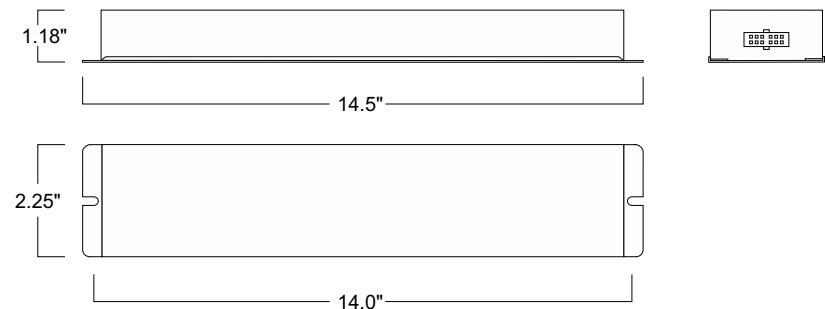

BSL310

Emergency LED Driver for LED Strips, Class 2 Output

Application

The BSL310 universal input (120-277 V) emergency LED driver works in conjunction with an AC LED driver that has an output current not to exceed 3.0 A. The emergency driver consists of a high-temperature nickel-cadmium battery, charger and electronic circuitry in one case. The BSL310 can deliver up to 10 watts to an LED load (measured at nominal battery voltage) for 90 minutes. If used in an emergency-only fixture, no AC driver is necessary. The BSL310 is suitable for indoor and damp locations. For more information about specific LED and AC driver compatibility, please call the factory.

Operation

When AC power fails, the BSL310 immediately switches to the emergency mode, operating the LEDs at a reduced lumen output for a minimum of 90 minutes. When AC power is restored, the emergency driver automatically returns to the charging mode.

Installation

The BSL310 does not affect normal fixture operation and may be used with either a switched or unswitched

fixture. If a switched fixture is used, an unswitched hot lead must be connected to the emergency driver. The emergency driver must be fed from the same branch circuit as the AC driver. Per UL requirements, the polycarbonate BSL310 must be enclosed if remote mounted outside of the fixture. Installation is not recommended with fixtures where the ambient temperature may fall below 0° C. The product is suitable for installation in sealed and gasketed fixtures.

Emergency Illumination

The BSL310 operates an LED load of up to 10.4 W at nominal battery voltage for a minimum of 90 minutes.

Specification

Emergency lighting shall be provided by using a LED fixture equipped with a Philips Bodine BSL310 universal input (120-277 V) emergency driver. This emergency driver shall consist of a high-temperature, maintenance-free nickel-cadmium battery, charger and electronic circuitry contained in one case. An illuminated test switch (ITS) to monitor charger and

battery and installation hardware shall be provided. The emergency driver shall be capable of delivering up to 10.4 watts to an LED load for a minimum of 90 minutes. The BSL310 is suitable for indoor and damp locations. The BSL310 shall have a maximum of 4.0 watts of input power and a 24.0 Watt-hour battery capacity and shall comply with emergency standards set forth by the current NEC. This device complies with Part 15 of the FCC Rules and meets CEC Title 20 (California Energy Commission) efficiency standards. The emergency driver shall be UL Classified for field or factory installation. See instructions below.

Warranty

The BSL310 is warranted for five (5) full years from date of manufacture (NOT pro-rata). Please see detailed warranty information on our web site.

Optional models: Call factory for additional models and configurations

BSL310C (Metal case, with conduit)	Order no. BSL310C2WM
BSL310M (Metal case, no conduit)	Order no. BSL310M2W
BSL310C-DF (Metal case, dual conduit)	Order no. BSL310CDFM

© 2017 Philips Lighting Holding B.V. All rights reserved. Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

Document order number: L2300264 17.0404



Philips Emergency Lighting
236 Mt. Pleasant Rd.
Collierville, TN 38017
Tech Support: 888.263.4638
Sales: 800.223.5728

philips.com/bodine