


BBOK09060007NPO
 BBOK09120007NPO
 BBOK09060007WPO
 BBOK09120007WPO

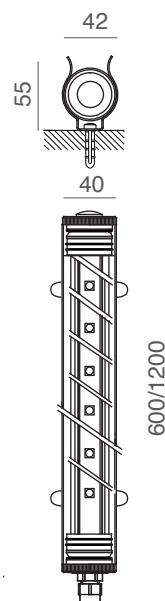

(mm)

		220V 240V	12W 20W		IP65		max 35°C -20°C																						
Finiture: - policarbonato satinato Finishing: - sanded polycarbonate		<p style="text-align: center;">Neutral White - (BBOK09120007NPO)</p> <table border="1"> <thead> <tr> <th>Offset(m)</th> <th>Cone width (m)</th> <th>Illuminance(lx)</th> </tr> </thead> <tbody> <tr> <td>0.5</td> <td>-</td> <td>2000</td> </tr> <tr> <td>1.0</td> <td>-</td> <td>500</td> </tr> <tr> <td>1.5</td> <td>-</td> <td>222</td> </tr> <tr> <td>2.0</td> <td>-</td> <td>125</td> </tr> <tr> <td>2.5</td> <td>-</td> <td>80</td> </tr> <tr> <td>3.0</td> <td>-</td> <td>55</td> </tr> </tbody> </table>							Offset(m)	Cone width (m)	Illuminance(lx)	0.5	-	2000	1.0	-	500	1.5	-	222	2.0	-	125	2.5	-	80	3.0	-	55
Offset(m)	Cone width (m)	Illuminance(lx)																											
0.5	-	2000																											
1.0	-	500																											
1.5	-	222																											
2.0	-	125																											
2.5	-	80																											
3.0	-	55																											

BBOK09_0007_PO

This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

874/2012

General Information	Caractéristiques Générales	Allgemeine Informationen	Informazioni generali	
Material	Matériaux	Materialien	Materiali	PC
Number of light sources	Nombre de Source(s)	Anzahl Lichtquellen	Numero sorgenti lum.	strip LED
Fixing system	Système de fixation	Befestigungssystem	Sistema di fissaggio	stainless steel brackets
Driver included	Driver intégré	Treiber inklusive	Driver incluso	YES
Protection class IEC	Classe électrique	Schutzklasse	Classe di isolamento	II
IP code	IP	Schutzart	Grado IP	IP65
IK code	IK	Schlagfestigkeit (IK)	Grado IK	/
Optic type	Optique	Optik	Ottica	OPAL-ASYMMETRIC-135°
Cable	Câble	Kabel	Cavo	2 m
Dimmable	Gradable	Dimmbar	Dimmerabile	NO
European Community mark	Marquage CE	CE-Zeichen	Marchio comunità europea	CE
Lifetime to 80% luminous flux	Durée vie 80% flux lumineux	Lebensdauer bis 80% Lichtstrom	Durata funzion. (80% flusso)	30 000 h
Weight (kg)	Poids (kg)	Gewicht (kg)	Peso (Kg)	0,7 kg - 1,15 kg
Electrical	Caractéristiques Electriques	Elektrische Kenndaten	Corrente	
Input voltage	Tension d'alimentation	Netzspannung	Tensione di alimentazione	220-240 V
Initial performances	Performances initiales	Anfängliche Leistung	Performance iniziali	
Initial input power	Initial input power	Systemleistung	Potenza di sistema	12W(60cm) - 20W(120cm)
Initial luminous flux	Initial luminous flux	Lichtstrom	Flusso luminoso iniziale	1080 lm/m
Initial LED luminaire efficacy	Initial LED luminaire efficacy	Effizienz	Efficienza luminosa iniziale	67 lm/W
Init. Corr. Color Temperature*	Init. Corr. Color Temperature*	Farbtemperatur*	Temperatura colore lampada*	3000 K - 4000 K
CRI	IRC	CRI	CRI	80
Application conditions	Conditions d'application	Einsatzbedingungen	Condizioni applicazione	
Ambient temperature range	Température ambiante	Umgebungstemperatur	Temperatura ambiente	max. + 35 °C / min. -20 °C

* Colour temperature could change max. +/- 8%.

BBOK09_0007_PO

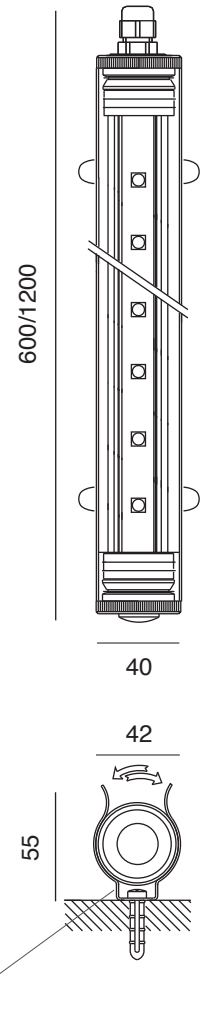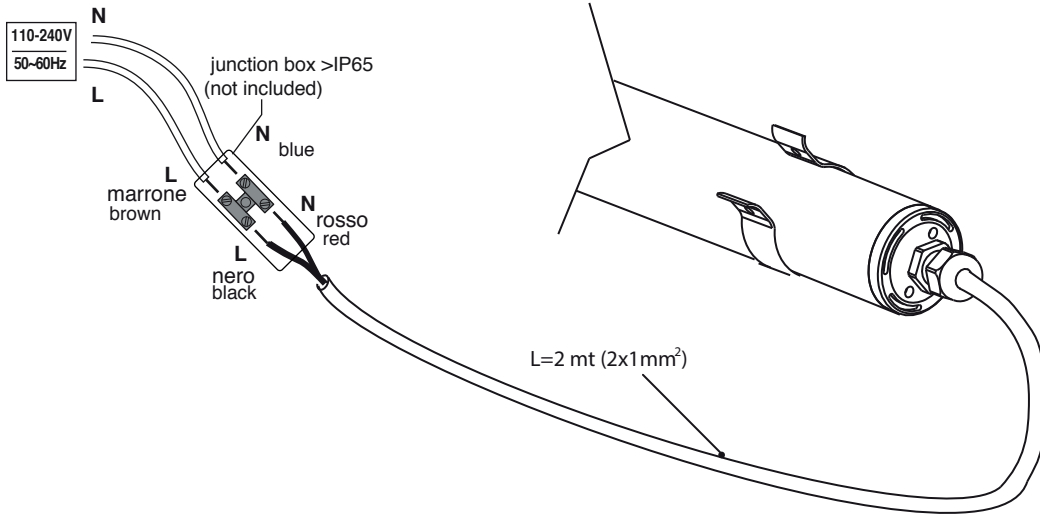

**ALIMENTATORE INCLUSO
FEEDER INCLUDED**

(mm)

GENERALI / GENERALS CABLAGGIO / WIRING	<p>-L'installazione deve essere fatta da personale qualificato. -Installation should be carried out by a suitable qualified installer.</p> <p>-Non aprire la lampada -Do not open the luminaire.</p> <p>-In caso di guasti, previa autorizzazione al reso di ILTI Luce, il prodotto non dovrà essere aperto, il pressacavo non deve essere smontato e il cavo deve essere tagliato lasciandone almeno 10/15cm. -In case of failure, upon a return authorization of ILTI LUCE, the product will not have to be opened, the cable gland must not be removed and the cable must be cut leaving at least 10/15cm</p> <p>-Tutte le operazioni di cablaggio e manutenzione vanno eseguite con l'interruttore generale in posizione OFF. -All wiring and maintenance must be performed with the main switch in the OFF position.</p> <p>-Fissare la lampada tramite le due staffe (incluse) con appositi tasselli da muro. -Fix the lamp with 2 brackets (included) using the wall dowels.</p>	<p>-Togliere tensione prima di eseguire operazioni di manutenzione. -Disconnect main voltage before maintenance operation.</p> <p>-Effettuare il cablaggio usando un sistema che garantisca almeno il grado IP della lampada. -Make the wiring using a system that guarantees at least the IP grade of the luminaire.</p>
	SMALTIMENTO/ DISPOSAL	<p>Secondo la direttiva comunitaria WEEE (Waste Electrical and Electronic Equipment) l'apparecchio non può essere smaltito con i rifiuti indifferenziati. Deve essere portato nelle strutture locali per lo smaltimento ed il riciclaggio dei prodotti elettronici. In accordance with EU Directive WEEE (Waste Electrical and Electronic Equipment), luminaires must not be disposed of with other household waste. At the end of their life, luminaires must be taken to the appropriate local facility available for the disposal or recycling of electronic products.</p>



si consiglia la conservazione delle seguenti istruzioni - we suggest you to keep this copy for your files

BBOK09120007NPO

download 

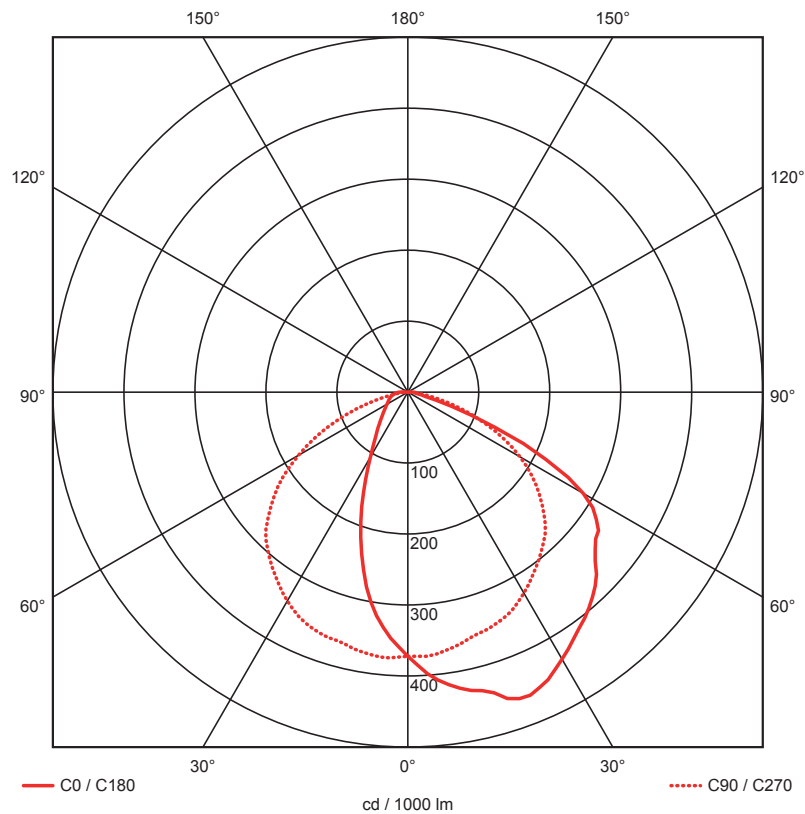


tabella di riepilogo prodotti/ product overview table

codice/ code	colore/ colour	tipo/ type	potenza/ power	caratteristiche/ specifications	fascio ottico/ optic beam	ottica/ optic	tipo di LED/ LED type	materiale/ material	fissaggio/ fixation	IP/ IP
BBOK09060007NPO	neutral white	esterni/ outdoor	12W	L= 60cm	asimmetrico/ asymmetric	schermo satinato/ sanded screen	nastro LED alta emissione/ LED strip high emission	alluminio e policarbonato/ aluminum and polycarbonate	con staffe/ with brackets	65
BBOK09120007NPO	neutral white	esterni/ outdoor	20W	L= 120cm	asimmetrico/ asymmetric	schermo satinato/ sanded screen	nastro LED alta emissione/ LED strip high emission	alluminio e policarbonato/ aluminum and polycarbonate	con staffe/ with brackets	65
BBOK09060007WPO	warm white	esterni/ outdoor	12W	L= 60cm	asimmetrico/ asymmetric	schermo satinato/ sanded screen	nastro LED alta emissione/ LED strip high emission	alluminio e policarbonato/ aluminum and polycarbonate	con staffe/ with brackets	65
BBOK09060007WPO	warm white	esterni/ outdoor	20W	L= 120cm	asimmetrico/ asymmetric	schermo satinato/ sanded screen	nastro LED alta emissione/ LED strip high emission	alluminio e policarbonato/ aluminum and polycarbonate	con staffe/ with brackets	65