

Your Office application bundle:

CoreLine Recessed LED34S & Presence detector LRM1011

Office lighting insights

When you arrive at the office, you know what you'll be working on and who you'll be working with. And you want to be at your best.

In an office workspace, lighting can help people to concentrate, communicate and cooperate. The right light will create a healthy, comfortable and inspiring environment. Philips office lighting solutions meet all European norms for this application, and can reduce energy costs by up to 65% when combined with smart controls.



More info: www.philips.com/coreline

Traditional

Conventional 4x18 W TLD (18x)

Savings over life* **€5848,**-



€8532,-

Application bundle

CoreLine Recessed LED34S VAR-PC (18x) incl. detector

^{*}Based on the European average of 12 cent/kW hours (including maintenance and lamp replacement cost) and the lighting design for this application bundle.

Bundle benefits

Bundle specifications

CoreLine Recessed LED34S VAR-PC




- Replacing conventional TL-D & TL-5
- Energy saving
- UGR < 19

Presence detector LRM1011



- Automatic switches off light when not required
- Small, unobtrusive sensor

Detection coverage diagram



CoreLine Recessed LED34S VAR-PC

Туре	RC120B LED34S/830 PSD W60L60 VAR-PC				
	RC120B LED34S/840 PSD W60L60 VAR-PC				
Power	35,5 W				
Luminous Flux	3400 lm				
Color temperature	3000 K, 4000 K				
Color Render Index	≥ 80				
Lifetime	50,000 hours				
Number of luminaires on MCB 16A type B	≤ 24				
Ordering (EOC) code	26656300 3000 K				
	26648800 4000 K				

Presence detector LRM1011

Tresente detector Entritori				
Detecting range at 2 - 5 m height	Ø 6 - 11 m			
Recommended mounting height	2 m - 5 m			
Switch off delay	10 sec 30 min. in 6 steps			
Number of luminaires on one control	≤ 15			
Ordering (EOC) code	44209800			

Lighting design insights

Display reflections

Minimize reflected glare on displays by using luminaires with proper office light distribution and a low glare ratio (UGR \leq 19).

Controls


Controls are located above desks to create optimum effect for presence detection.


Brightness

Create bright walls and ceilings by using wide light beams. This will make the entire space look more spacious and pleasant.

Illuminance requirements

EN12464-1 requirement at desk ≥ 500 lux. Higher levels increase visibility.



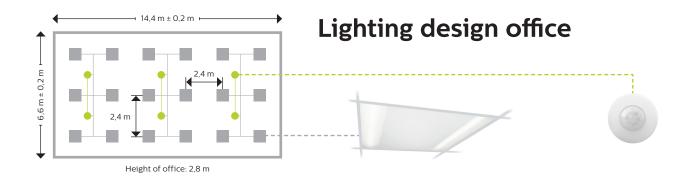

Luminaire types	# Lum.	Em [lux]	Sys. Power	Installed Power	W/m2	W/m2/100lux
Conventional 4xTLD 18 W	18	539	69,5 W	1251 W	13,2	2,4
CoreLine Recessed LED34S VAR-PC	18	515	35,5 W	639 W	6,7	1,2