

# SmartBright Wide Waterproof

WT008C


Mounting instruction

WT008C-M002a


AS/NZS 60598	ta 40°C	IP65	IK08	
-----------------	------------	------	------	--

Type Number	Lum. Power	Lumen Output	Colour Temperature	Voltage	Frequency	
WT008C L1200 NW 4000lm NZ	38W	4000lm	4000K	220-240V	50/60 Hz	1.70
WT008C L1200 CW 4000lm NZ			6500K	220-240V	50/60 Hz	1.70
WT008C L1500 NW 6000lm NZ	58W	6000lm	4000K	220-240V	50/60 Hz	2.14
WT008C L1500 CW 6000lm NZ			6500K	220-240V	50/60 Hz	2.14

Unit: mm

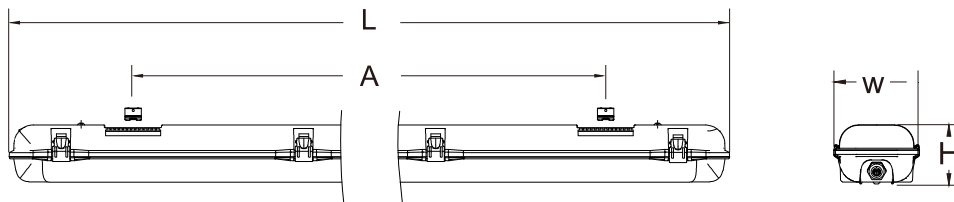

Type Number	Length	Width	Height	A
WT008C L1200	1260	124	86	900
WT008C L1500	1560	124	86	1200

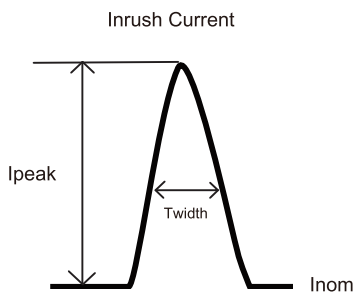


Type Number	WT008C L1200	WT008C L1500
Inom(mA)	175	254
Ipeak(A)	10.1	11.4
Twidth(us)	23	26.3
AC Leakage Current(uA)	126	148
MCB(Type B 16A)	20	20
MCB(Type C 16A)	32	32

<p><b>A</b></p> <p>Accessories for Ceiling Mounting Clip: x2 Expansion bolt: x2 Screw: x2</p>	<p><b>B</b></p> <p>Accessories for Suspension Mounting Hook: x2 Clip: x2 Expansion bolt: x2 Screw: x2</p>
---	---


Working Temperature: -20°C~40°C.

1

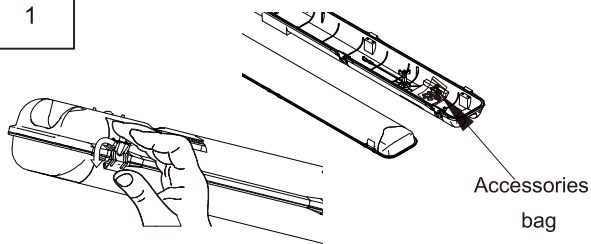


Open the luminaire and take out the LED module plate to find the accessories bag.

2

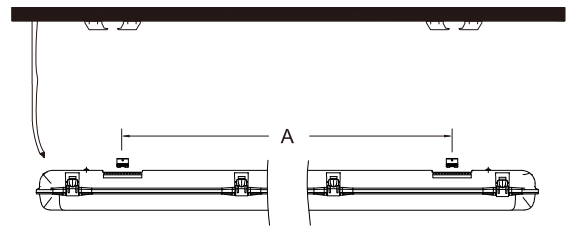


Drill holes to fix the expansion bolt inside according to the A dimension, then install the mounting clips

3

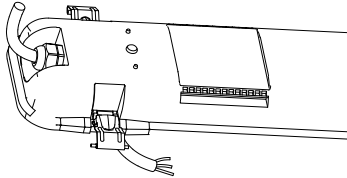


Fix the housing bottom locked by the clips, make the mains cable go through the PG grommet.

4

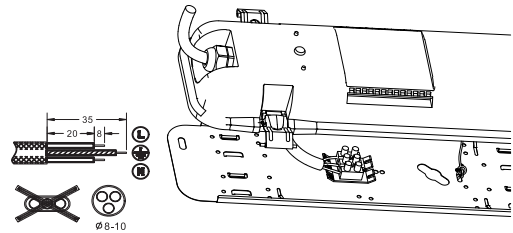


Hang the LED module plate onto the housing bottom With plastic belt hook.  
Connect the mains cable to terminal block as above diagram.

5

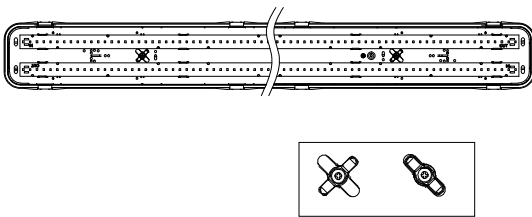

Rotate the plastic holder to fix the lamp plate.

6

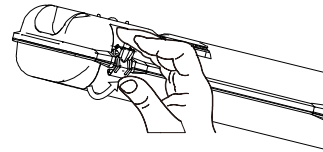

Close the optical cover and lock the clips, then tighten the PG grommet, fasten the screw of the clips.  
(Reference value for PG waterproof connector's tightening torque: 1.2-1.9 N·M)



1. Read this manual before you start to install the luminaire.
2. The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
3. TURN OFF the power during installation or maintenance to avoid electrical shock.
4. Do not switch on before complete installation.
5. For indoor and semi outdoor use, not available for public outdoor.
6. The light source of this luminaire is not replaceable; when the light source reaches its lifespan, the whole luminaire shall be replaced.
7. The corrosive atmosphere or hazardous materials such as sulfur, chlorine, phthalate, etc must be avoided during the use and storage.