



Landscape LED Lighting



Professional LED Lighting Specification Guide

PHILIPS
HABCO

Experience

The new speed of light

Since 1953, Philips Hadco has built products to a superior standard of quality and craftsmanship using only the finest raw materials and components available. We've built our business to a higher standard and focus on consistency and reliability in every product we develop. We inspect everything we manufacture multiple times, for fit and finish. Each of our designs is precision engineered and backed by ISO 9001 certification. Our comprehensive warranty exceeds industry standards.

This alone doesn't explain how we became the industry leader. There's another important area where we excel.

Service

Smart, Prompt, and Flexible.

At Philips Hadco, we provide a broad selection of styles, finishes, and lamping options in the industry. Our expertise in service helps you navigate through the choices and ensures that you receive what you need, when you need it; even if it requires a custom design. When you choose Philips Hadco, for your landscape lighting needs, we work to assure your lighting project will be on time. That's why more architects and designers depend on Philips Hadco every year, because they know what they'll get – Satisfaction.



Contents

Quick references	2
Visual indexes	2
Applications	6
Mountings & Sizes	10
Finishes & Materials	12
LED Low Voltage	14
Accent lighting (bullet)	16
Wall Wash lighting	20
Flood lighting (spot lights)	21
Down lighting	22
In-ground lighting	24
Deck lighting	25
Path and walkway lighting (path lights)	26
LED Line Voltage	32
Accent lighting (bullet)	34
Flood lighting	40
Step and Aisle lighting	41
In-ground lighting	44
Bollard lighting	50
Residential lighting	52
Installation processes	56

LED Low Voltage



What is an LED?


Simply put, an LED, or Light Emitting Diode, is a diode that is chip-mounted in a reflector cup and held in place by a milled steel frame connected to a pair of electrical wires.

When current flows across the junction of the two different materials, light is produced from within the solid crystal chip. Philips Hadco uses bright white LEDs as standard, which are developed by coating a blue LED with a phosphor, and thereby generating a white color.

Why use LED?

- LEDs provide a longevity that is up to 20 times that of standard incandescent lamps, translating to low maintenance.
- LEDs are solid-state devices, meaning no moving parts, glass or filaments to break.
- LEDs are small in size and resistant to vibration or shock.
- LEDs contain no mercury and are environmentally friendly.
- LEDs are more efficient, using up to 90% less energy than other light sources based on watts.

Accent lighting

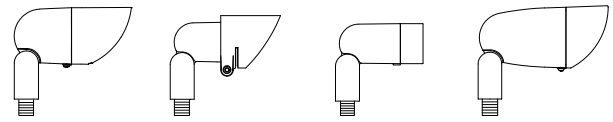


BL5016
pg. 16

BL616
pg. 16

BL7D1
pg. 17

BUL16
pg. 17

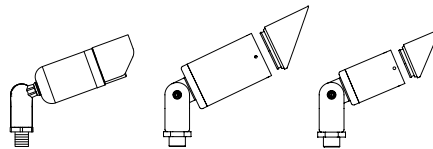


CUL16
pg. 18

MA5
pg. 19

MA7
pg. 19

Wall Wash lighting




AAL1D
pg. 20

AUL1D
pg. 20


LED Low Voltage

Flood lighting




WAML1D/WBML1D
pg. 21

Down lighting




DL1D
pg. 22



DRL1
pg. 22




DRL2
pg. 23



DRL1D
pg. 23

In-ground lighting




iL116
pg. 24



iUL516
pg. 24


Deck lighting




DAL1D
pg. 25

DCL1D/DUL1D
pg. 25


Path and walkway lighting



AL4D
pg. 26




AL41D
pg. 26




CL2D2
pg. 27




CUL2D
pg. 27



CUL7D
pg. 28



CUL9D
pg. 28




CUL10D
pg. 29




CUL14D
pg. 29




ML4D
pg. 30



RL4D
pg. 30



RL9D
pg. 31



TRL4D
pg. 31

LED Line Voltage



What is an LED?


Simply put, an LED, or Light Emitting Diode, is a diode that is chip-mounted in a reflector cup and held in place by a milled steel frame connected to a pair of electrical wires.

When current flows across the junction of the two different materials, light is produced from within the solid crystal chip. Philips Hadco uses bright white LEDs as standard, which are developed by coating a blue LED with a phosphor, and thereby generating a white color.

Why use LED?

- LEDs provide a longevity that is up to 20 times that of standard incandescent lamps, translating to low maintenance.
- LEDs are solid-state devices, meaning no moving parts, glass or filaments to break.
- LEDs are small in size and resistant to vibration or shock.
- LEDs contain no mercury and are environmentally friendly.
- LEDs are more efficient, using up to 90% less energy than other light sources based on watts.

Accent lighting

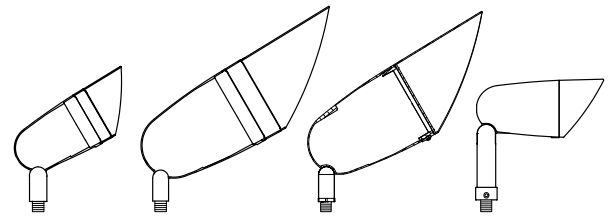


B1
pg. 34

B4
pg. 34

B_4
pg. 35

BT1
pg. 35

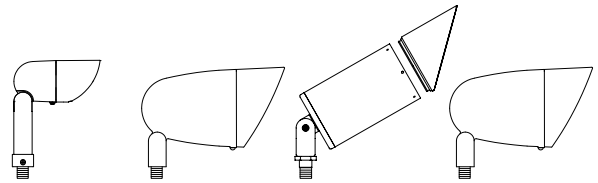


BT5016
pg. 36

BU3
pg. 36

MA3
pg. 37


B3
pg. 37



FL-50
pg. 38

FL-51
pg. 39


Flood lighting




WAM1D/WBM1D
pg. 40

LED Line Voltage

Step and Aisle lighting




96 Line
(round)
pg. 41




96 Line
(square)
pg. 41




RSF2
pg. 42



RSS2
pg. 42




RSC2
pg. 42




RSV2
pg. 42


In-ground lighting




i1.5
pg. 45




i2.5
pg. 46



i3.5
pg. 47




iT216
pg. 48




i3
pg. 49

Bollard lighting

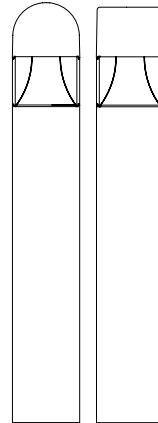

RD6/RF6
pg. 50

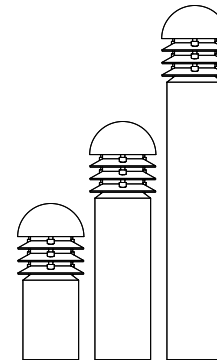

DB14/DB21/DB30
pg. 51

Residential lighting



Palermo
(medium)
pg. 52




Palermo
(large)
pg. 52




Riviera
(medium)
pg. 53



Manor
(medium)
pg. 54



Manor
(large)
pg. 54



Manor
(extra large)
pg. 54

Applications

Trees, statues, pools, walkways; what features make up your landscape project? Which elements in an environment should be highlighted, and which should be down-played? The answers to those questions will determine the lighting fixtures and techniques you'll ultimately use.

Lighting Styles

- Accent lighting is lighting that focuses attention on a particular object or area. It commands the viewer to take note of a certain subject within the landscape. Examples of accent lighting are spotlighting a statue, path lighting a walkway or highlighting a flower bed with spread lights.
- Fill-in lighting is background lighting. It ties the overall landscape picture together, creating a comfortable transition from one accented area to another. Some examples may be backlighting a tree, washing a wall or fence, or flooding a row of evergreens with soft light.
- Down lighting may seem more natural because we are accustomed to the light of the sun and moon. In fact, most of the lighting that occurs naturally in life is from above. Office lighting, warehouse lighting, sports lighting, and home lighting are all examples of downlighting techniques. Downlighting is also very efficient in that you get to use all the light.
- Up lighting tends to draw more attention and is often more dramatic. Therefore, it is used for accent lighting purposes more often than downlighting.
- Back lighting is used to silhouette a plant, tree, or structure. Many times the shape of a plant is more interesting than the detail. By gently lighting a wall or fence behind the plant, you identify the shape.

Techniques

There are a variety of lighting techniques that in combination create a beautiful and secure environment for anyone. For each technique there are fixtures that work better than others. Here are some techniques and the fixtures that best create the desired effects:

Accent lighting



Spot lighting

Effect: Focuses an intense beam of light on a particular subject to showcase focal points.

Tip: It's best not to light focal points uniformly or evenly. This gives the subject a washed out appearance and removes details. Statuary should be lit from overhead when possible. If you must light from the ground, place fixtures further out and aim back at the subject. Two levels of light work well; a spot on the facial features and a flood on the body creates a dramatic presentation.

Recommendation: Bullets, Inground lights



Wall Washing

Effect: Gently illuminates a wall or fence to create a backdrop for the main focal points.

Tip: Avoid bright spots by positioning the fixtures 18" to 24" away from the wall.

Recommendation: Wall-washers, Mini Flood lights




Silhouetting

Effect: Displays a dark image of the subject by lighting a vertical surface behind the subject. Effective technique to show shape, but does not show color or texture of the subject. Accomplishes wall washing at the same time.

Tip: Choose a subject that is close to a wall and place the fixture out of sight behind the subject. Flood beam spreads or wall washers work the best.

Recommendation: Bullets, Wall Washers, Mini Flood lights



Shadowing

Effect: Creates a shadow on a vertical surface by placing the fixture in front of the subject.

Tip: Best on open growth plant material. The closer the fixture to the subject, the larger the shadow will be. General illumination lamps create a better effect, use a T-3 or bayonet base lamp instead of an MR or Par lamp.

Recommendation: Bullets, Wall Washers, Mini Flood lights



Grazing

Effect: Enhances texture of a surface by positioning a fixture close to the surface and aiming the beam upward or downward.


Tip: Try grazing on brick, stone, and stucco walls or any interesting masonry. Wide floods work best on walls or wide surfaces. Place fixtures 6" to 8" from the surface. When up lighting, put as much light as possible on the underside of the eave. This will reflect back a good amount of ambient light, many times sufficient to light sidewalks. Remember to aim the lamp with the horizontal beam pattern parallel to the wall. Don't forget the texture of tree trunks.

Recommendation: Bullets, Ingrounds, Mini Flood lights



Keep in Mind...

Often, it is easier to re-lamp a fixture on the ground rather than one mounted in a tree or on the soffit of a building. However, fixtures placed high and aimed down are less likely to be disturbed to need re-aiming. They also do not get covered by leaves, snow, etc. The decision of which to use is determined by the characteristics and lighting goals of each individual job.



Moon lighting
large trees

Effect: Simulates the light of the full moon filtering through the foliage of a tree. Projects shadows on the ground and lights what is under the tree (paths, sidewalks, flowers, etc.).

Tip: Mount with proper tree mount accessory. Always run wire or conduit up the non-viewing side of the trunk. Best mounting height is approximately 20' and consider composites for their light weight. Aim down as much as possible to prevent glare and mount fixtures in open areas of the foliage to avoid hot spots.

Recommendation: Bullets, Mini Flood lights, Down lights



Moon lighting
small trees

Effect: Down lighting from within the tree, casting shadows, and lighting what is under the tree. Best mounting height no more than 10'.

Tip: For use with smaller ornamental trees to cast light around the base or through the tree.

Recommendation: Down lights, Micro Bullets




Tree lighting
up and down

Effect: Combines simulated full moon light filtering through the tree and up lighting from within to illuminate the canopy. Creates a softer light on the trunk and keeps all fixtures off the ground.

Tip: Mount downlights on tree mount accessory 15' to 25' and use shrouds and/or louvers to reduce glare. Also consider using spread lens to widen the beam of the lamp. Mount uplights in the lowest forks of tree on tree mount accessory. Shrouds and louvers not necessary on uplights. Use wide beam lamps for all fixtures. Run wire up non-viewing side of trunk.

Recommendation: Bullets




Up lighting

Effect: An unnatural, therefore dramatic way of lighting trees and architectural structures. Highlights details on structures and can be used to repeat patterns to create interest.

Tip: For dense foliage trees, place the fixtures outside of the drip line and aim back approximately 45°. Open growth trees can be lit by placing fixtures closer to the trunk. In all cases, get light to the top of the tree. Since a lot of light can be lost with up lighting, take care to aim fixtures so you can recapture the lost light. (Large trees in the background, peaks of structures, eaves to reflect light back). Look for interesting details to highlight on architecture.

Recommendation: Bullets, Mini Flood lights, Inground lights




Mirror lighting

Effect: Lights a background scene to reflect it into a nearby body of water.

Tip: Place fixture between water and the scene behind the water. From the primary viewing area, observe what is reflected in the water in the daylight. Then uplight those items to achieve the same view at night. Avoid downlighting (including path lights) around water as the light source will be reflected in the water causing glare.

Recommendation: Bullets, Inground lights




Sign lighting

Effect: Identifies signage after dark: entrances to sub-divisions, country clubs, office complexes, and small shopping centers.

Tip: Choose optics that complement the orientation of the sign. Wide floods for horizontal signs and bullets or ingrounds for vertical signs.

Recommendation: Bullets, Mini Flood lights, Inground lights




Pond lighting

Effect: Illuminates and identifies water in ponds and water features.

Tip: Water should "look" clean enough to drink. Avoid lighting still, stagnant water with white light. Use colored lenses if water is not clean, or to create different atmospheric effects. Place light fixtures under objects or plant material in the water for interesting effects (lily pads, boulders, art, etc.). For a different approach, light material behind the pond to create the mirror effect and leave the pond dark.

Recommendation: Underwater lights



Fountain lighting

Effect: Creates dramatic effects of water movement in fountains and water features while enhancing the structure of the fountain.

Tip: Water must be clean or moving. In most cases it is better to light "through" water than "at" water. Allow the water to fall directly on the fixture. If possible, try lighting tiered bowl fountains from overhead. Otherwise, each bowl should have a fixture in it. Avoid over lighting and lighting evenly around the structure as this tends to wash out the detail.

Recommendation: Bullets, Underwater lights

Applications

In your mind's eye, you've already captured the power and beauty of light. You can rely on Philips Hadco for the broad range of tools you'll need to project that vision.

Quick Tips

- An ice blue lens enhances the colors of evergreen foliage and also "cools off" a halogen lamp like the MR16, giving it the appearance of moonlight.
- When installing low voltage spread lights in a bed of annual flowers, use the S6 adjustable stake so the fixture can be raised as the flowers grow.
- To help conceal the light source, use a cutoff louver such as the ML1 for the BL616 or the ICG16 for the IL116.
- To reduce glare, adjust the shroud on bullets.
- To avoid poisoning trees, use only stainless steel or cadmium-plated steel fasteners when mounting fixtures.
- When attaching low voltage cable to a tree, use a wire tie with a grommet end. This allows the cable to flex slightly off the tree, preventing damage to both.



Security lighting

Light on all walls of the home serves to minimize hiding places for unwelcome visitors.

Up lighting

An ideal place to apply uplighting: Shining skyward toward an area of architectural interest.

Silhouetting

Lighting the wall behind this tree accentuates its interesting shape and branch structure.

Area Lighting



Walkway lighting

Effect: Creates symmetrical patterns of light for illuminating walkways, steps, etc. Used primarily for navigation purposes.

Tip: By lighting only the entrance to a walkway, any turns, and all changes in elevation, you may avoid the runway look and still accomplish the task. Placing fixtures near plant material can create shadows and interest rather than just lighting the hard surface.

Recommendation: Path lights, Spread lights, Beacons

Safety & Security Lighting



Security lighting

Effect: Fills in areas of darkness where intruders could hide. The right combination of low-level lighting in the landscape will improve both security and appearance.

Tip: Effective residential security lighting is not prison yard lighting. The goal is to be able to see movement on the property. This can be accomplished best with lower levels and more sources rather than one or two bright sources (avoid glare).

Recommendation: Bullets, Mini Flood lights, Inground lights, Deck lights, Step lights, Path lights, Spread lights, Beacons




Grazing
The textured beauty of stone masonry becomes a striking feature when grazed with light.


Walkway
The repeated symmetry of this walkway lighting guides visitors while accenting the line of the path in the design, all with minimum glare.

Residential


Shading
This technique allows the designer to paint walls with non-light, generating added dimensions by repeating forms in shadow.




Spread lighting
Effect: Low-level, evenly dispersed illumination to highlight plants, flowers, low shrubs, and ground cover.
Tip: Place shielded fixtures over low plant material, boulders, and plant beds. Partially shielded fixtures may be used in deeper foliage and the additional light will backlight greenery.
Recommendation: Path lights, Spread lights, Beacons, Underwater lights



Down lighting
Effect: Technique of mounting fixtures in trees or on structures. Floods will broadcast light over a wide area creating general ambient light. Spots will dramatically identify focal points. Extremely efficient method of lighting— which means you can often use fewer fixtures. Very natural looking.
Tip: Look for items of interest on the ground that you want to light, then look up for places to mount and conceal fixtures. Select proper beam spreads for what you want to accomplish. Use accessories like spread lenses, louvers, and shrouds to maximize effects and reduce glare.
Recommendation: Bullets, Mini Flood lights, Down lights



Step lighting
Effect: Lights traffic areas for safety while adding beauty to the steps.
Tip: Every step must be illuminated and visible. Mount fixtures in step risers, underneath railings, or on vertical posts. All changes in elevation and terraces should be lit for safety.
Recommendation: Deck lights, Deck Post lights, Step lights



Deck lighting
Effect: Illuminates deck floors and steps while enhancing design.
Tip: Consider placing fixtures under built-in benches for a clean, inconspicuous look. When placing fixtures under handrails, mount fixtures high enough for good light distribution but be careful not to see the source when seated. Run cables under the deck to reduce clutter.
Recommendation: Down lights, Deck lights, Deck Post lights

Mountings & Sizes

Designed to contribute a consistent appearance with complementary style to your home for many years to come. From a distance let your eyes be the judge.

Wall Lighting

With numerous designs to choose from, Philips Hanover Lantern has a style to compliment any architecture. Each series has multiple sizes and mounting options, so you can find the appropriate fixture for your application. With 20 finishes to select from, we can beautifully integrate with your exterior color scheme.

Post Lighting

Philips Hanover Lantern offers an expansive line of posts and designer base wraps to compliment all of our lighting fixtures. Whether you use a single post outside your front entrance, or multiple posts to line your driveway, you will provide security as well as beauty to your property.

Pier Lighting

Create a dramatic entrance to your property with the use of our pier mounted fixtures. Philips Hanover Lantern manufactures a wide range of models and sizes for any application.

Mailboxes & Signs

Add a totally integrated look to your property with the addition of a sign or mailbox. Philips Hanover Lantern offers many standard cast aluminum signs in a variety of shapes and sizes. Our upscale mailboxes, available in your choice of any of our elegant hand applied finishes, are manufactured in a variety of configurations and sizes.



Wall Lighting



Post Lighting




Pier Lighting



Mailboxes & Signs

A fixture size for every application

The entrance to your home or property sets the style and mood of its owners. Choosing a fixture that is properly proportioned to its surroundings is critical. The following series of photographs are used to illustrate this point. Your local lighting showroom can offer expertise in helping you select the correct fixture for your application.

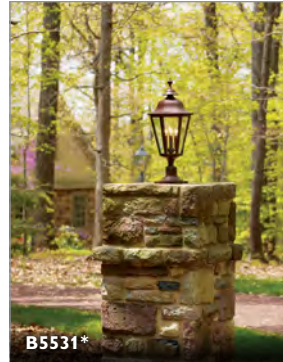

Pier Lighting Manor series is just one of many styles offered in four different sizes. Shown above in a pier mount configuration on a 30" square pier, size and scale of the fixture to its environment is critical. If you have doubts or questions, your local lighting showroom can help determine size.



Post Mount Most home centers offer only smaller sized outdoor lighting fixtures. The Jamestown series fixtures, in the photographs above, clearly illustrate the need for larger scale fixtures. A small size lantern is not recommended for use on a 6' residential post. A 20" high or larger fixture will be more proportional.



Wall Mount Consumers often make the mistake of selecting outdoor lighting fixtures that are too small. South Bend series in the photos above show different size fixtures of the small design in the identical installation. Remember to keep the location of the electrical box in mind for proper height.

* Depicted with 400 pier base mount.

Finishes & Materials

Low & Line Voltage finishes

For LED and Non-LED fixtures.

The proper fit and finish

Some lighting fixtures should be statements unto themselves; others should blend into the environment they serve. A fixture that improperly stands out from its surroundings will distract from the artistry of the application. That's why choosing the right material and finish is just as important as choosing the right lamp.

To maximize your choices, Philips Hadco offers an assortment of materials in a spectrum of finishes, each painstakingly developed to harmonize and endure in naturally occurring environments.

Our ULTEM High-Performance Polymer is a composite material that resists chipping, flaking and fading. Perfect for harsh environments, these composite fixtures are available in Black, Bronze and Verde ... ready to blend into common varieties of soil, mulch or vegetation.

Our die cast aluminum fixtures feature thermoset powder-coat finishes for lasting beauty and durability. In addition to Black, Bronze, Verde and White, other finishes are available for a variety of applications. Garden Green blends into darker vegetation, Sienna matches landscape stone, and Speckled Stone takes it's cues from the color palette of the desert. Each finish makes its own statement of style.


Designed to resemble concrete, our Limestone and Sand Stone finishes are developed with actual aggregate, which is bonded to cast aluminum and sanded for unmatched beauty and durability.

Our spun copper fixtures and cast brass fixtures are natural and will patina over time; or you can choose them pre-aged with oxidized finishes like Antique Copper or Oiled Brass. And for a natural finish that never loses its shine, we offer Stainless Steel.


Don't see your finish here? Don't worry. We have hundreds more standard colors, plus color matching.

Contact your Philips Hadco representative for more details.

Brass






Copper



Other





Composite




Residential finishes

For LED and Non-LED Residential fixtures only.



Aluminum



A Black



B White

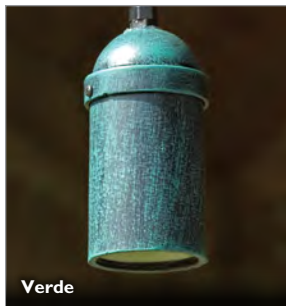

G Verde




H Bronze



I Grey



K Garden Green



T Speckled Stone

Finishes



ABS Antique Brass



ACP Antique Copper



ARD Antique Red



ASI Antique Silver



BLK Black



BRZ Bronze



BRN Brown



FGN Forest Green



GRA Granite



IRN Ironstone




RBZ Rustic Bronze



SRT Shadow Rust



VGN Verde



VBZ Verde Bronze



VCP Verde Copper



VTC Vintage Copper



WBZ Weathered Bronze



WHT White

LED Low Voltage

What is an LED?

Simply put, an LED, or Light Emitting Diode, is a diode that is chip-mounted in a reflector cup and held in place by a milled steel frame connected to a pair of electrical wires. When current flows across the junction of the two different materials, light is produced from within the solid crystal chip. Philips Hadco uses bright white LEDs as standard, which are developed by coating a blue LED with a phosphor, and thereby generating a white color.

Why use LED?

- LEDs provide a longevity that is up to 20 times that of standard incandescent lamps, translating to low maintenance.
- LEDs are solid-state devices, meaning no moving parts, glass or filaments to break.
- LEDs are small in size and resistant to vibration or shock.
- LEDs contain no mercury and are environmentally friendly.
- LEDs are more efficient, using up to 90% less energy than other light sources based on watts.





LED Low Voltage

Accent lighting	16
BL5016, BL616, BL7D1, BUL16, CUL16, MA5, MA7	
Wall wash lighting	20
AAL1D, AUL1D	
Flood lighting	21
WAML1D/WBML1D	
Down lighting	22
DL1D, DRL1, DRL2, DRL1D	
In-ground lighting	24
iL1116, iUL516	
Deck lighting	25
DAL1D, DCL1D/DUL1D	
Path and walkway lighting	26
AL41D, AL4D, CL2D2, CUL2D, CUL7D, CUL9D, CUL10D, CUL14D, ML4D, RL4D, RL9D, TRL4D	

LED Accent lighting


BL5016

Aluminum Bullet



BL5016HS7LED7NFW

- A** Black
- G** Verde
- H** Bronze
- T** Speckle Stone



Series	Finish	Mount	Lamp	Optics	CCT
BL5016	<input type="checkbox"/>	S7	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
BL5016 Aluminum Bullet	A Black	S7 Stake	LED4	NF Narrow Flood	W Warm
	G Verde H Bronze T Speckle Stone		LED7	SP Spot FL Flood NF Narrow Flood	W Warm C Cool*

Fixture will be shipped with lamp installed. Lamp not sold separately.

* Cool (**C**) CCT only compatible with Narrow Flood (**NF**) Optics configuration.

Features

- 12 Volt
- MR16 LED Lamp
- 1/2" NPS fitter
- Ships with S7 mounting stake

Shroud

Fully-rotatable, double gasketed, die-cast marine grade aluminum alloy.

Finish

Thermoset powder coated in; black, bronze, speckled stone or hand-rubbed verde antiqued over black.

Optics

Clear tempered glass, affixed at 10° angle for natural cleaning.

LED

- 25,000 hours life (no mercury).
- 5.5W lamp with 24° beam spread. Color temp (CCT): warm white (2,700K nominal).
- 7W lamp with 15°, 24° or 36° beam spread. Color temp (CCT): cool white (4,000K nominal) or warm white (2,700K nominal). Lamp only sold integral to BL5016.

Wiring

Pre-wired with a 3ft. pigtail for easy hookup to the low voltage supply cable.

Socket

Bi-pin type (GU5.3).

Labels

ETL and cETL listed.


BL616

Aluminum Bullet



BL616AS7LED7NFW

- A** Black
- G** Verde
- H** Bronze



Series	Finish	Mount	Lamp	Optics	CCT
BL616	<input type="checkbox"/>	S7	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
BL616 Aluminum Bullet	A Black	S7 Stake	LED4	NF Narrow Flood	W Warm
	G Verde H Bronze		LED7	SP Spot FL Flood NF Narrow Flood	W Warm C Cool*

Fixture will be shipped with lamp installed. Lamp not sold separately.

* Cool (**C**) CCT only compatible with Narrow Flood (**NF**) Optics configuration.

Features

- 12 Volt
- MR16 LED Lamp
- 1/2" NPS fitter
- Ships with S7 mounting stake

Shroud

Gasketed, cast aluminum.

Finish

Thermoset powder coated in; black, bronze, or hand-rubbed verde antiqued over black.

Optics

Clear tempered glass.

LED

- 25,000 hours life (no mercury).
- 5.5W lamp with 24° beam spread. Color temp (CCT): warm white (2,700K nominal).
- 7W lamp with 15°, 24° or 36° beam spread. Color temp (CCT): cool white (4,000K nominal) or warm white (2,700K nominal). Lamp only sold integral to BL616.

Wiring

Pre-wired with a 3ft. pigtail for easy hookup to the low voltage supply cable.

Socket

Bi-pin type (GU5.3).

Labels

ETL and cETL listed.

LED Accent lighting

BL7D1 Aluminum Bullet

Series	Lens	CCT	Finish	Mount
BL7D1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	S7
BL7D1 Aluminum Bullet	C Clear Lens F Frosted Lens	W Warm C Cool	A Black G Verde H Bronze	S7 Stake

Features

- 12 Volt
- 2.5 total watts
- ½" NPS fitter
- Ships with S7 mounting stake

Housing

Die-cast aluminum with fully-adjustable swivel arm with vibration-proof locking teeth.

Shroud

Fully-rotatable, gasketed, cast aluminum.

Finish

Thermoset powder coated in; black, bronze, or hand-rubbed verde antiqued over black.

Optics

Clear or Frosted tempered glass.

LED

- 50,000 hours life (no mercury).
- Color temp (CCT): cool white (6,000K) or warm white (3,000K).
- High Output LED, powered 350mA DC.

Wiring

Pre-wired with a 3 ft. pigtail for easy hookup to the low voltage supply cable.

Electrical

Input voltage range (VAC): 10.8-17.5, regulated to 12V DC. Integral surge


protector. (Magnetic low voltage transformer required).

Labels

ETL and cETL listed.



BL7D1FWHS7

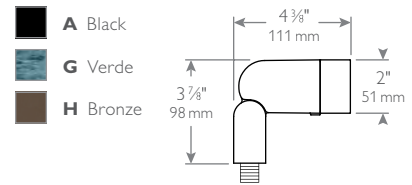

BUL16 Composite Bullet

Series	Finish	Mount	Lamp	Optics	CCT
BUL16	<input type="checkbox"/>	S7	LED4	NF	W
BUL16 Composite Bullet	A Black G Verde H Bronze	S7 Stake	LED4	NF Narrow Flood	W Warm

Fixture will be shipped with lamp installed. Lamp not sold separately.

Features

- 12 Volt
- MR16 LED Lamp
- ½" NPS fitter
- Ships with S7 mounting stake

Housing

One-piece injection molded ULTEM High Performance Polymer with fully-adjustable swivel arm and vibration-proof locking teeth.

Shroud

Fully-rotatable, gasketed, ULTEM High Performance Polymer composite.

Finish

Color impregnated material in; black, bronze, or hand-rubbed verde antiqued over black.

Optics

Clear tempered glass affixed at 10° angle for natural cleaning.

LED

- 25,000 hours life (no mercury).
- 5.5W lamp with 24° beam spread.
- Color temp (CCT): warm white (2,700K nominal). Lamp only sold integral to BUL16.

Wiring

Pre-wired with a 3 ft. pigtail for easy hookup to the low voltage supply cable.

Socket


Bi-pin type (GU5.3).

Labels

ETL and cETL listed.



BUL16HS7LED4NF

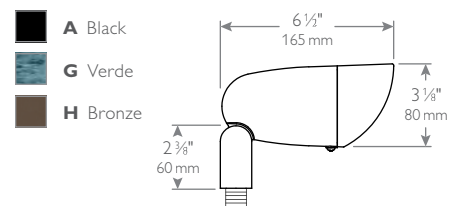


LED Accent lighting

CUL16

Copper Bullet



Copper



Series	Mount	Lamp	Optics	CCT
CUL16	S7	LED4	NF	W
CUL16 Copper Bullet	S7 Stake	LED4	NF Narrow Flood	W Warm

Fixture will be shipped with lamp installed. Lamp not sold separately.

Features

- 12 Volt
- MR16 LED Lamp
- ½" NPS fitter
- Ships with S7 mounting stake

Housing

Machined solid copper with fully-adjustable natural brass swivel arm and brass fastener.

Shroud

Fully rotatable.

Finish

Natural copper will age to a fine patina.

Optics

Clear tempered glass.

LED

- 25,000 hours life (no mercury).
 - 5.5W lamp with 24° beam spread.
- Color temp (CCT): warm white (2,700K nominal). Lamp only sold integral to CUL16.

Wiring

Pre-wired with a 3 ft. pigtail for easy hookup to the low voltage supply cable.

Socket

Bi-pin type (G4).

Labels

ETL and cETL listed.



LED Accent lighting

MA5

Aluminum Bullet

Series	Optics	Source	CCT	Finish	Shroud	Mount
MA5	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	S7
MA5 Aluminum Bullet	SP Spot NF Narrow Flood FL Flood	DL low-output DH high-output	W Warm C Cool	A Black H Bronze	- None L Long 45°	S7 Stake



Features

- 12 Volt
- 6.2 total watts (high power)
- 5.1 total watts (low power)
- 1/2" NPS fitter
- Ships with S7 mounting stake

Housing

Precision machined aluminum from 6061-T6 material. Stainless Steel fasteners.

Shroud

Optional Long 45°

Finish

Thermoset powder coated in; black or bronze.

Optics

Three beam spread:

- Spot - 23°
- Medium - 30°
- Flood - 54°

LED

- 35,000 hours life at 30°C ambient temperature and 70% lumen maintenance.
- Color temp (CCT): 3,000K or 4,000K

Wiring

Pre-wired with a 3ft. pigtail for easy hookup to the low voltage supply cable.

Electrical

Input voltage range (VAC): 10 - 14, regulated to 12V DC.

IP rating


IP65 Completely dust-tight and sealed to withstand low pressure jets of water from any direction.

Labels

ETL and cETL listed.



MA5NFDHWHL57

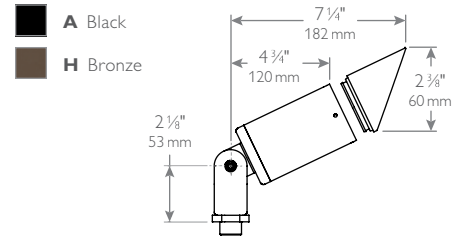

MA7

Aluminum Bullet

Series	Source	CCT	Finish	Shroud	Mount
MA7	D	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	S7
MA7 Aluminum Bullet	D LED	W Warm C Cool	A Black H Bronze	- None L Long 45°	S7 Stake



Features

- 12 Volt
- 1.6 total watts
- 1/2" NPS fitter
- Ships with S7 mounting stake

Housing

Precision machined aluminum from 6061-T6 material. Stainless Steel fasteners.

Shroud

Optional Long 45°

Finish

Thermoset powder coated in; black or bronze.

Optics

Module features dome lens and integrated 100° beam pattern optics.

LED

- 35,000 hours life at 30°C ambient temperature and 70% lumen maintenance.
- Color temp (CCT): 3000K or 4000K

Wiring

Pre-wired with a 3ft. pigtail for easy hookup to the low voltage supply cable.

Electrical

Input voltage range (VAC): 10 - 14, regulated to 12V DC.

IP rating


IP65 Completely dust-tight and sealed to withstand low pressure jets of water from any direction.

Labels

ETL and cETL listed.




MA7DWH-S7

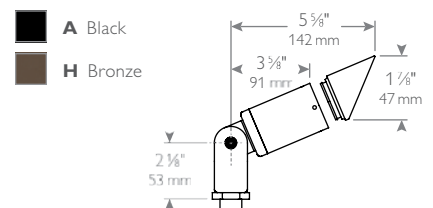

LED Wall Wash lighting

AAL1D

Aluminum Wall Washer

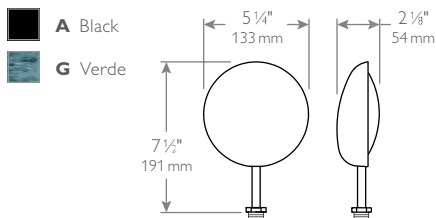

Series	CCT	Finish	Mount
AAL1D	<input type="checkbox"/>	<input type="checkbox"/>	S7
AAL1D Aluminum Wall Washer	C3 Cool (high power) C2 Cool (low power) W3 Warm (high power) W2 Warm (low power)	A Black G Verde	S7 Stake

Features

- 12 Volt
- 3.8 total watts (high power)
- 2.4 total watts (low power)
- 1/2" NPS fitter
- Ships with S7 mounting stake

Finish

Thermoset powder coated in; black, or hand-rubbed verde antiqued over black.

Optics

Clear polycarbonate lens. 150° LED spread.

LED

- 50,000 hours life at 25°C ambient temperature and 70% lumen maintenance.
- Color temp (CCT): 3,000K or 4,000K

Wiring

Pre-wired with a 3 ft. pigtail for easy hookup to the low voltage supply cable.

Electrical

Input voltage range (VAC): 10.8 - 13.2, regulated to 12V DC.

IP rating


IP66 Completely dust-tight and sealed against direct jets of water.

Labels

ETL and cETL listed.

AUL1D

Composite Wall Washer

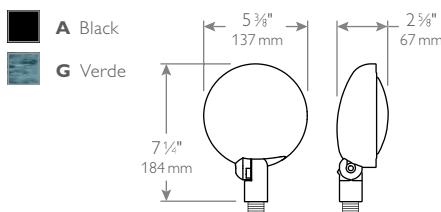

Series	CCT	Finish	Mount
AAL1D	<input type="checkbox"/>	<input type="checkbox"/>	S7
AAL1D Aluminum Wall Washer	C3 Cool (high power) C2 Cool (low power) W3 Warm (high power) W2 Warm (low power)	A Black G Verde	S7 Stake

Features

- 12 Volt
- 3.8 total watts (high power)
- 2.4 total watts (low power)
- 1/2" NPS fitter
- Ships with S7 mounting stake

Finish

Color impregnated material in black, hand-rubbed verde antiqued over black.

Optics

Clear polycarbonate lens. 150° LED spread.

LED

- 50,000 hours life at 25°C ambient temperature and 70% lumen maintenance.
- Color temp (CCT): 3,000K or 4,000K

Wiring

Pre-wired with a 3 ft. pigtail for easy hookup to the low voltage supply cable.

Electrical

Input voltage range (VAC): 10.8 - 13.2, regulated to 12V DC.

IP rating

IP66 Completely dust-tight and sealed against direct jets of water.

Labels

ETL and cETL listed.

LED Flood lighting

WAML1D/WBML1D Aluminum Flood light

Series	CCT	Lens	Finish	Mount
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
WAML1D Aluminum Spot light with shroud	C3 Cool (high power) C2 Cool (low power)	- Clear Lens F Frosted Lens	A Black B White G Verde H Bronze	S7 Stake
WBML1D Aluminum Spot light without shroud	W3 Warm (high power) W2 Warm (low power)			

Features

- 12 Volt
- 3.8 total watts (high power)
- 2.4 total watts (low power)
- ½" NPS fitter
- >80 CRI
- Ships with S7 mounting stake

Housing

Die-cast aluminum with fully-adjustable swivel arm, with vibration-proof locking teeth.

Shroud

Gasketed, cast aluminum available (WAML1D).

Finish

Thermoset powder coated in; black, white, or hand-rubbed verde antiqued over black.

Optics

Clear or frosted tempered glass. 150° LED spread (equivalent to wide flood).

LED

- 50,000 hours life at 25°C ambient temperature and 70% lumen maintenance.
- Color temp (CCT): cool white (4,000K) or warm white (3,000K)

Wiring

Pre-wired with a 3 ft. pigtail for easy hookup to the low voltage supply cable.

Electrical

Input voltage range (VAC): 10.8 - 13.2, regulated to 12V DC. Integral surge protector (magnetic low voltage transformer required).

IP rating


IP66 Completely dust-tight and sealed against direct jets of water.

Labels

ETL and cETL listed.




- A** Black
- B** White
- G** Verde
- H** Bronze

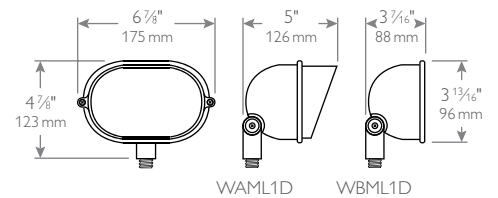

LED Down lighting

DL1D

Aluminum Down light



DL1DW3G

A Black **G** Verde

Series	CCT	Finish
DL1D	<input type="checkbox"/>	<input type="checkbox"/>
DL1D Aluminum Down light	C3 Cool (6.4W) C2 Cool (3.7W) W3 Warm (6.4W) W2 Warm (3.7W)	A Black G Verde

Features

- 12 Volt
- 3.8 total watts (high power)
- 2.4 total watts (low power)

Housing

Cast aluminum top cap with aluminum body and 5 ft. stainless suspension cable.

Finish

Thermoset powder coated in; black or hand-rubbed verde antiqued over black.

LED

- 50,000 hours life at 25°C ambient temperature and 70% lumen maintenance.
- Color temp (CCT): 3,000K or 4,000K.

Wiring

Pre-wired with a 8 ft. pigtail for easy hookup to the low voltage supply cable.

Electrical

Input voltage range (VAC): 10.8 - 13.2, regulated to 12V DC.

IP rating


IP66 Completely dust-tight and sealed against direct jets of water.

Labels

ETL and cETL listed.

DRL1

Aluminum Down light



DRL1GLED7NFW

A Black **G** Verde

Series	Finish	Lamp	Optics	CCT
DRL1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
DRL1 Aluminum Down light	A Black G Verde	LED4 LED7	NF Narrow Flood SP Spot FL Flood NF Narrow Flood	W Warm W Warm C Cool*

Fixture will be shipped with lamp installed. Lamp not sold separately.

* Cool (C) CCT only compatible with Narrow Flood (NF) Optics configuration.

Features

- 12 Volt
- MR16 LED Lamp

Housing

Cast aluminum top cap with aluminum body and 5 ft. stainless suspension cable.

Finish

Thermoset powder coated in; black or hand-rubbed verde antiqued over black.

Optics

Clear tempered glass.

LED

- 25,000 hours life (no mercury).
- 5.5W lamp with 24° beam spread. Color temp (CCT): warm white (2,700K nominal).
- 7W lamp with 15°, 24° or 36° beam spread. Color temp (CCT): cool white (4,000K nominal) or warm white (2,700K nominal). Lamp only sold integral to DRL1.

Wiring

Pre-wired with a 8 ft. pigtail for easy hookup to the low voltage supply cable.

Socket


Bi-pin type (GU5.3).

Labels

ETL and cETL listed.

LED Down lighting

DRL1D Aluminum Down light

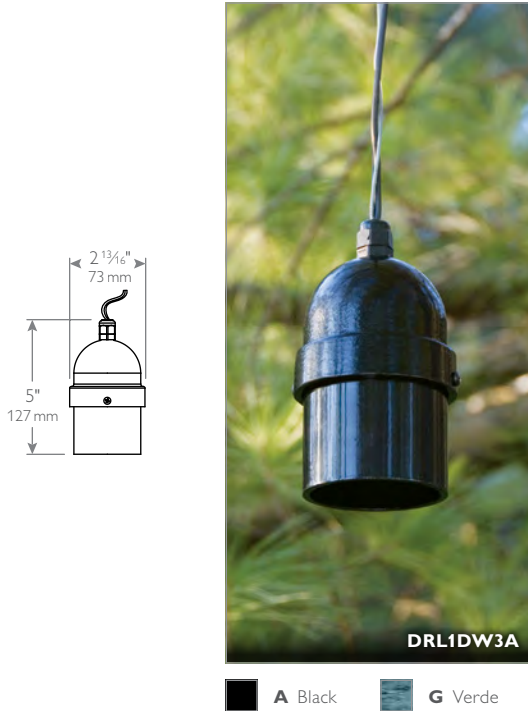

Series	CCT	Finish
DRL1D	<input type="checkbox"/>	<input type="checkbox"/>
DRL1D Aluminum Down light	C3 Cool (6.4W) C2 Cool (3.7W) W3 Warm (6.4W) W2 Warm (3.7W)	A Black G Verde

Features

- 12 Volt
- 3.8 total watts (high power)
- 2.4 total watts (low power)

Housing

Cast aluminum top cap with aluminum body and 5 ft. stainless suspension cable..

Finish

Thermoset powder coated in; black or hand-rubbed verde antiqued over black.

LED

- 50,000 hours life at 25°C ambient temperature and 70% lumen maintenance.
- Color temp (CCT): 3,000K or 4,000K.

Wiring

Pre-wired with a 8 ft. pigtail for easy hookup to the low voltage supply cable.

Electrical

Input voltage range (VAC): 10.8 - 13.2, regulated to 12V DC.


IP rating

IP66 Completely dust-tight and sealed against direct jets of water.

Labels

ETL and cETL listed.

DRL2 Aluminum Down light

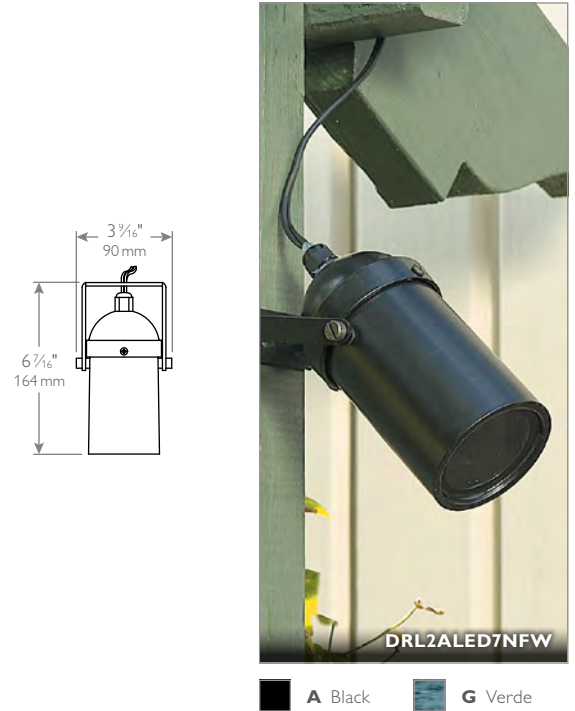

Series	Finish	Lamp	Optics	CCT
DRL2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
DRL2 Aluminum Down light	A Black G Verde	LED4 LED7	NF Narrow Flood SP Spot FL Flood NF Narrow Flood	W Warm W Warm C Cool*

Fixture will be shipped with lamp installed. Lamp not sold separately.

* Cool (C) CCT only compatible with Narrow Flood (NF) Optics configuration.

Features

- 12 Volt
- MR16 LED Lamp

Housing

Cast aluminum top cap with aluminum body and adjustable mounting yoke.

Finish

Thermoset powder coated in; black or hand-rubbed verde antiqued over black.

Optics

Clear tempered glass.

LED

- 25,000 hours life (no mercury).
- 5.5W lamp with 24° beam spread. Color temp (CCT): warm white (2,700K nominal).
- 7W lamp with 15°, 24° or 36° beam spread. Color temp (CCT): cool white (4,000K nominal) or warm white (2,700K nominal). Lamp only sold integral to DRL2.

Wiring

Pre-wired with a 3 ft. pigtail for easy hookup to the low voltage supply cable.

Socket

Bi-pin type (GU5.3).

Labels

ETL and cETL listed.

LED In-ground lighting


iL116

Composite Inground



iL116GHLED4NFW

- N** Natural Cast Bronze
- SS** Stainless Steel
- H** Bronze



Series	Rock guard	Finish	Lamp	Optics	CCT
iL116	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
iL116 Composite Inground	- None G Guard	N Natural Cast Bronze	LED4	NF Narrow Flood	W Warm
		SS Stainless Steel H Bronze	LED7	SP Spot FL Flood NF Narrow Flood	W Warm C Cool*

Fixture will be shipped with lamp installed. Lamp not sold separately.

* Cool (**C**) CCT only compatible with Narrow Flood (**NF**) Optics configuration.

Features

- 12 Volt
- MR16 LED Lamp

Housing

Single-piece compression molded, fiberglass reinforced polyester composite housing.

Trim ring

Compression molded polyester, or die-cast stainless steel or natural cast bronze.

LED

- 25,000 hours life (no mercury).
- 5.5W lamp with 24° beam spread. Color temp (CCT): warm white (2,700K nominal).
- 7W lamp with 15°, 24° or 36° beam spread. Color temp (CCT): cool white (4,000K nominal) or warm white (2,700K nominal). Lamp only sold integral to iL116.

Optics

Clear convex, tempered soda-lime glass for high impact resistance. 2,200-pound live-load rated, standard walkover.

Rock guard

Optional rock guard is directional for glare control. Compression molded polyester or natural cast bronze.

Wiring

Pre-wired with a 3ft. pigtail for easy hookup to the low voltage supply cable.

Aiming

15° either side of vertical and full 360° rotation. Angle degree marks for precise vertical aiming.

IP rating

IP66/68 to 1M.

Labels

ETL and cETL listed.


iUL516

Composite Inground



iUL516HLED4NFW

- H** Bronze



Series	Finish	Lamp	Optics	CCT
iUL516	H	LED4	NF	W
iUL516 Composite Inground	H Bronze	LED4	NF Narrow Flood	W Warm

Fixture will be shipped with lamp installed. Lamp not sold separately.

Features

- 12 Volt
- MR16 LED Lamp

Housing

Single-piece injection molded fiberglass reinforced ULTEM High Performance Polymer.

Finish

Color impregnated composite material in; bronze.

Optics

Convex lens is clear, high temperature tempered glass furnished with silicone O-ring for watertight seal.

LED

- 25,000 hours life (no mercury).
- 5.5W lamp with 24° beam spread. Color temp (CCT): warm white (2,700K nominal). Lamp only sold integral to iUL516.

Wiring

Pre-wired with a 3ft. pigtail for easy hookup to the low voltage supply cable.

Socket

Bi-pin type (GU5.3).

Labels

ETL and cETL listed.

LED Deck lighting

DAL1D

Aluminum or Stainless Steel Deck light

Series	CCT	Finish
DAL1D	<input type="checkbox"/>	<input type="checkbox"/>
DAL1D Aluminum or Stainless Steel Deck light	W Warm C Cool	A Black B White G Verde H Bronze T Speckled Stone SS Stainless Steel



Features

- 12 Volt
- 1.7 total Watts
- >80 CRI

Housing

A, B, G, H, & T: Cast aluminum construction with stainless steel set screws.
SS: Stainless steel housing with stainless steel set screws.

Finish

A, B, G, H, & T: Thermoset powder coated in; black, white, bronze, speckled stone or hand-rubbed verde antiqued over black.
SS: Stainless steel with brushed matte finish.

Optics

Frosted annealed glass.

LED

- 50,000 hours life at 25°C ambient temperature and 70% lumen maintenance.
- Color temp (CCT): cool white (4,000K nominal) or warm white (3,000K nominal).

Wiring

Pre-wired with a 6 ft. pigtail for easy hookup to the low voltage supply cable.

Electrical


Input voltage range (VAC): 11 - 15 (magnetic low voltage transformer required).

IP rating

IP67 Completely dust-tight and sealed against direct jets of water.

Labels

ETL and cETL listed.

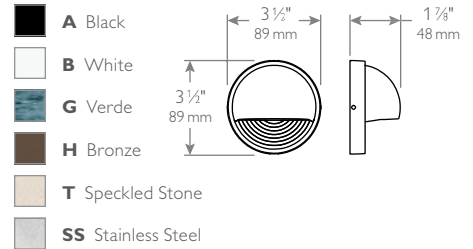

Series	CCT	Finish
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
DUL1D Composite Deck light	W Warm C Cool	A Black G Verde H Bronze
DCL1D Brass Deck light	W Warm C Cool	N Natural Brass



Features

- 12 Volt
- 1.7 total Watts
- >80 CRI

Housing

A, G, H: Injection fiberglass reinforced molded ULTEM High Performance Polymer housing with stainless steel set screws.
N: Solid die-cast brass housing and backplate with stainless steel set screws.

Finish

A, G & H: Color impregnated composite material in; black, bronze or hand-rubbed verde antiqued over black.
N: Natural brass.

Optics

Frosted annealed glass.

LED

- 50,000 hours life at 25°C ambient temperature and 70% lumen maintenance.
- Color temp (CCT): cool white (4,000K nominal) or warm white (3,000K nominal).

Wiring

Pre-wired with a 6 ft. pigtail for easy hookup to the low voltage supply cable.

Electrical


Input voltage range (VAC): 11 - 15 (magnetic low voltage transformer required).

IP rating

IP67 Completely dust-tight and sealed against direct jets of water.

Labels

ETL and cETL listed.

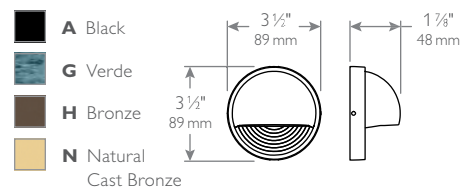

LED Path and walkway lighting

AL41D

Aluminum Path light



AL41DW3GS7

A Black
 G Verde
 H Bronze

Series	CCT	Lamp	Finish	Mount
AL41D	W	3		S7
AL41D Aluminum Path light	W Warm	3 12V/3.8W	A Black G Verde H Bronze	S7 Stake

Features

- 12 Volt
- 3.8 total watts
- ½" NPS fitter
- Ships with S7 mounting stake

Housing

Cast aluminum with stainless steel fasteners.

Finish

Thermoset powder coated in; black, bronze or hand-rubbed verde antiqued over black.

Finial

Clear seeded glass finial sparkles when illuminated.

LED

- Delivers 70% lumen maintenance at 50,000 hours.
- Color temp (CCT): cool white (4,000K nominal) or warm white (3,000K nominal).

Wiring

Pre-wired with a 3 ft. pigtail for easy hookup to the supply cable.

Electrical


Input voltage range (VAC): 10.8 - 13.2, regulated to 12V DC. Integral surge protector (magnetic low voltage transformer required).

IP rating

IP66 Dust tight and sealed against direct jets of water.

Labels

ETL and cETL listed.



AL4D

Aluminum Path light



AL4DW3GS7

A Black
 G Verde
 H Bronze

Series	CCT	Lamp	Finish	Mount
AL4D	W	3		S7
AL4D Aluminum Path light	W Warm	3 12V/3.8W	A Black G Verde H Bronze	S7 Stake

Features

- 12 Volt
- 3.8 total watts
- ½" NPS fitter
- Ships with S7 mounting stake

Housing

Cast aluminum with stainless steel fasteners.

Finish

Thermoset powder coated in; black, bronze or hand-rubbed verde antiqued over black.

LED

- Delivers 70% lumen maintenance at 50,000 hours.
- Color temp (CCT): cool white (4,000K nominal) or warm white (3,000K nominal).

Wiring

Pre-wired with a 3 ft. pigtail for easy hookup to the supply cable.

Electrical


Input voltage range (VAC): 10.8 - 13.2, regulated to 12V DC. Integral surge protector (magnetic low voltage transformer required).

IP rating

IP66 Dust tight and sealed against direct jets of water.

Labels

ETL and cETL listed.



LED Path and walkway lighting

CL2D2

Aluminum Path light

Series	CCT	Lamp	Finish	Mount
CL2D	W	2		S7
CL2D Aluminum Path light	W Warm	2 12V/3.8W	A Black H Bronze	S7 Stake

Features

- 12 Volt
- 3.8 total watts
- ½" NPS fitter
- Ships with S7 mounting stake

Housing

Cast aluminum with stainless steel fasteners.

Finish

Thermoset powder coated in; black or bronze.

LED

- Delivers 70% lumen maintenance at 50,000 hours.
- Color temp (CCT): cool white (4,000K nominal) or warm white (3,000K nominal).

Optics

Clear tempered flat glass lens.

Wiring

Pre-wired with a 3ft. pigtail for easy hookup to the supply cable.

Electrical


Input voltage range (VAC): 10.8 - 13.2, regulated to 12V DC. Integral surge protector (magnetic low voltage transformer required).

IP rating

IP66 Dust tight and sealed against direct jets of water.

Labels

ETL and cETL listed.



A Black **H** Bronze

Series	CCT	Mount
CUL2D		S7
CUL2D Copper Path light	W Warm C Cool	S7 Stake

Features

- 12 Volt
- 4.2 total watts
- ½" NPS fitter
- Stem (included)
- > 80 CRI
- Ships with S7 mounting stake

Housing

Spun solid copper roof and solid copper stem. Machined copper or brass threaded adapter for tool-less relamping.

Finish

Natural copper will patina with age. Reflective white powdercoat on underside of roof.

LED

- 50,000 hours life at 25°C ambient temperature and 70% lumen maintenance.
- Color temp (CCT): cool white (4,000K nominal) or warm white (3,000K nominal).

Optics

Frosted borosilicate glass.

Wiring

Pre-wired with a 6ft. pigtail for easy hookup to the supply cable.

Electrical


Input voltage range (VAC): 11 - 15 (magnetic low voltage transformer required).

IP rating

IP67 Dust tight and sealed against direct jets of water.

Labels

ETL and cETL listed.



Copper

LED Path and walkway lighting

CUL7D

Copper/Stainless Path light



CUL7DWS7

Copper

Series	CCT	Mount
CUL7D	<input type="checkbox"/>	S7
CUL7D Copper/Stainless Path light	W Warm C Cool	S7 Stake

Features

- 12 Volt
- 4.2 total watts
- ½" NPS fitter
- Stem (included)
- > 80 CRI
- Ships with S7 mounting stake

Housing

Spun solid copper or stainless steel roof and solid copper stem. Machined copper or brass threaded adapter for tool-less relamping.

Finish

Natural copper will patina with age. Reflective white powdercoat on underside of roof.

LED

- 50,000 hours life at 25°C ambient temperature and 70% lumen maintenance.
- Color temp (CCT): cool white (4,000K nominal) or warm white (3,000K nominal).

Optics

Frosted borosilicate glass.

Wiring

Pre-wired with a 6 ft. pigtail for easy hookup to the supply cable.

Electrical


Input voltage range (VAC): 11 - 15 (magnetic low voltage transformer required).

IP rating

IP67 Dust tight and sealed against direct jets of water.

Labels

ETL and cETL listed.



CUL9D

Copper Path light



CUL9DWS7

Copper

Series	CCT	Mount
CUL9D	<input type="checkbox"/>	S7
CUL9D Copper Path light	W Warm C Cool	S7 Stake

Features

- 12 Volt
- 4.2 total watts
- ½" NPS fitter
- Stem (included)
- > 80 CRI
- Ships with S7 mounting stake

Housing

Spun solid copper roof and solid copper stem. Machined copper or brass threaded adapter for tool-less relamping.

Finish

Natural copper will patina with age. Reflective white powdercoat on underside of roof.

LED

- 50,000 hours life at 25°C ambient temperature and 70% lumen maintenance.
- Color temp (CCT): cool white (4,000K nominal) or warm white (3,000K nominal).

Optics

Clear/frosted borosilicate glass.

Wiring

Pre-wired with a 6 ft. pigtail for easy hookup to the supply cable.

Electrical


Input voltage range (VAC): 11 - 15 (magnetic low voltage transformer required).

IP rating

IP67 Dust tight and sealed against direct jets of water.

Labels

ETL and cETL listed.

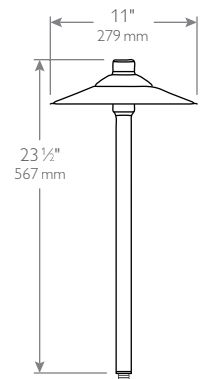

LED Path and walkway lighting

CUL10D

Copper Path light

Series	CCT	Mount
CUL10D	<input type="checkbox"/>	S7
CUL10D Copper Path light	W Warm C Cool	S7 Stake

Features

- 12 Volt
- 4.2 total watts
- ½" NPS fitter
- Stem (included)
- > 80 CRI
- Ships with S7 mounting stake

Housing

Spun solid copper roof and solid copper stem. Machined copper or brass threaded adapter for tool-less relamping.

Finish

Natural copper will patina with age. Reflective white powdercoat on underside of roof.

LED

- 50,000 hours life at 25°C ambient temperature and 70% lumen maintenance.
- Color temp (CCT): cool white (4,000K nominal) or warm white (3,000K nominal).

Optics

Clear/frosted borosilicate glass.

Wiring

Pre-wired with a 6 ft. pigtail for easy hookup to the supply cable.

Electrical


Input voltage range (VAC): 11 - 15 (magnetic low voltage transformer required).

IP rating

IP67 Dust tight and sealed against direct jets of water.

Labels

ETL and cETL listed.

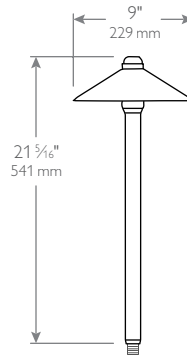

Copper

CUL14D

Copper Path light

Series	CCT	Mount
CUL14D	<input type="checkbox"/>	S7
CUL14D Copper Path light	W Warm C Cool	S7 Stake

Features

- 12 Volt
- 4.2 total watts
- ½" NPS fitter
- Stem (included)
- > 80 CRI
- Ships with S7 mounting stake

Housing

Spun solid copper roof and solid copper stem. Machined copper or brass threaded adapter for tool-less relamping.

Finish

Natural copper will patina with age. Reflective white powdercoat on underside of roof.

LED

- 50,000 hours life at 25°C ambient temperature and 70% lumen maintenance.
- Color temp (CCT): cool white (4,000K nominal) or warm white (3,000K nominal).

Optics

Frosted borosilicate glass.

Wiring

Pre-wired with a 6 ft. pigtail for easy hookup to the supply cable.

Electrical


Input voltage range (VAC): 11 - 15 (magnetic low voltage transformer required).

IP rating

IP67 Dust tight and sealed against direct jets of water.

Labels

ETL and cETL listed.



Copper

LED Path and walkway lighting

ML4D

Aluminum Path light



ML4DW3GS7

- A Black
- G Verde
- H Bronze

Series	CCT	Lamp	Finish	Mount
ML4D	W	3	<input type="checkbox"/>	S7
ML4D Aluminum Path light	W Warm	3 12V/3.8W	A Black G Verde H Bronze	S7 Stake

Features

- 12 Volt
- 3.8 total watts
- ½" NPS fitter
- Ships with S7 mounting stake

Housing

Cast aluminum with stainless steel fasteners.

Finish

Thermoset powder coated in; black, bronze or hand-rubbed verde antiqued over black.

LED

- Delivers 70% lumen maintenance at 50,000 hours.
- Color temp (CCT): cool white (4,000K nominal) or warm white (3,000K nominal).

Wiring

Pre-wired with a 3 ft. pigtail for easy hookup to the supply cable.

Electrical


Input voltage range (VAC): 10.8 - 13.2, regulated to 12V DC. Integral surge protector (magnetic low voltage transformer required).

IP rating

IP66 Dust tight and sealed against direct jets of water.

Labels

ETL and cETL listed.



RL4D

Aluminum Path light



RL4DW3AS7

- A Black
- H Bronze

Series	CCT	Lamp	Finish	Mount
RL4D	W	3	<input type="checkbox"/>	S7
RL4D Aluminum Path light	W Warm	3 12V/3.8W	A Black H Bronze	S7 Stake

Features

- 12 Volt
- 3.8 total watts
- ½" NPS fitter
- Ships with S7 mounting stake

Housing

Cast aluminum construction.

Finish

Thermoset powder coated in; black or bronze.

LED

- Delivers 70% lumen maintenance at 50,000 hours.
- Color temp (CCT): cool white (4,000K nominal) or warm white (3,000K nominal).

Optics

Frosted tempered glass.

Wiring

Pre-wired with a 3 ft. pigtail for easy hookup to the supply cable.

Electrical


Input voltage range (VAC): 10.8 - 13.2, regulated to 12V DC. Integral surge protector (magnetic low voltage transformer required).

IP rating

IP66 Dust tight and sealed against direct jets of water.

Labels

ETL and cETL listed.



LED Path and walkway lighting

RL9D Aluminum Path light

Series	CCT	Lamp	Finish	Mount
RL9D	<input type="checkbox"/>	3	<input type="checkbox"/>	S7
RL9D Aluminum Path light	W Warm - Cool	3 12V/3.8W	A Black H Bronze T Speckled Stone	S7 Stake

Features

- 12 Volt
- 3.8 total watts
- 1/2" NPS fitter
- >80 CRI
- Ships with S7 mounting stake

Housing

Cast aluminum with stainless steel fasteners.

Finish

Thermoset powder coated in; black, bronze, speckled stone.

LED

- 50,000 hours life at 25°C ambient temperature and 70% lumen maintenance.
- Color temp (CCT): cool white (4,000K nominal) or warm white (3,000K nominal).

Wiring

Pre-wired with a 3ft. pigtail for easy hookup to the supply cable.

Electrical


Input voltage range (VAC): 11 - 15 (magnetic low voltage transformer required).

IP rating

IP67 Dust tight and sealed against direct jets of water.

Labels

ETL and cETL listed.



A Black **H** Bronze **T** Speckled Stone

TRL4D Aluminum Path light

Series	CCT	Lamp	Finish	Mount
TRL4D	W	3	G	S7
TRL4D Aluminum Path light	W Warm	3 12V/3.8W	G Verde	S7 Stake

Features

- 12 Volt
- 3.8 total watts
- 1/2" NPS fitter
- Ships with S7 mounting stake

Housing

Cast aluminum with stainless steel fasteners.

Finish

Thermoset powder coated in; hand-rubbed verde antiqued over black.

LED

- Delivers 70% lumen maintenance at 50,000 hours.
- Color temp (CCT): cool white (4,000K nominal) or warm white (3,000K nominal).

Optics

Frosted borosilicate glass.

Wiring

Pre-wired with a 3ft. pigtail for easy hookup to the supply cable.

Electrical


Input voltage range (VAC): 10.8 - 13.2, regulated to 12V DC. Integral surge protector (magnetic low voltage transformer required).

IP rating

IP66 Dust tight and sealed against direct jets of water.

Labels

ETL and cETL listed.

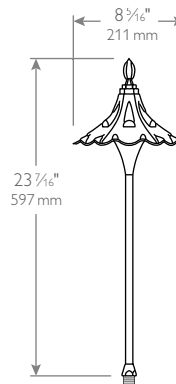

G Verde

LED Line Voltage

What is an LED?

Simply put, an LED, or Light Emitting Diode, is a diode that is chip-mounted in a reflector cup and held in place by a milled steel frame connected to a pair of electrical wires. When current flows across the junction of the two different materials, light is produced from within the solid crystal chip. Philips Hadco uses bright white LEDs as standard, which are developed by coating a blue LED with a phosphor, and thereby generating a white color.

Why use LED?

- LEDs provide a longevity that is up to 20 times that of standard incandescent lamps, translating to low maintenance.
- LEDs are solid-state devices, meaning no moving parts, glass or filaments to break.
- LEDs are small in size and resistant to vibration or shock.
- LEDs contain no mercury and are environmentally friendly.
- LEDs are more efficient, using up to 90% less energy than other light sources based on watts.



LED Line Voltage

Accent lighting	34
B1, B4, B_4, BT1, BT5016, BU3, MA3, B3, FL-50, FL-51	
Flood lighting	40
WAM1D/WBM1D	
Step and Aisle lighting	41
96 Line, RSF2, RSS2, RSC2, RSV2	
In-ground lighting	44
i1.5, i2.5, i3.5, iT216, i3	
Bollard lighting	50
DB14/DB21/DB30, RD6/RF6	
Residential lighting	52
Palermo, Riviera, Manor	

LED Accent lighting

B1

Aluminum Bullet



B1ALED7NFWS

- A** Black
- G** Verde
- H** Bronze

Series	Finish	Lamp	Optics	CCT	Shroud
B1	<input type="checkbox"/>	LED7	NF	W	<input type="checkbox"/>
B1 Aluminum Bullet	A Black G Verde H Bronze	LED7 8W	NF Narrow Flood	W Warm	S Short L Long

Fixture will be shipped with lamp installed. Lamp not sold separately.

Features

- 120 Volt
- PAR20 LED Lamp
- 1/2" NPS fitter
- Shroud required

Housing

Die-cast aluminum with fully-adjustable swivel arm with vibration-proof locking teeth.

Shroud

Die-cast aluminum, provided with lens and silicone O-ring. Either long or short shroud is required.

LED

- 25,000 hours life (no mercury).
- 8W lamp with 25° beam spread.
- Color temp (CCT): cool white (4,000K nominal) or warm white (2,700K nominal). Lamp only sold integral to B1.

Finish

Thermoset powder coated in; black, bronze or hand-rubbed verde antiqued over black.

Optics

Provided with optional shrouds only.

Wiring


Pre-wired with high temperature #18 wire.

Socket

High temp porcelain medium base.

Labels

ETL and cETL listed.

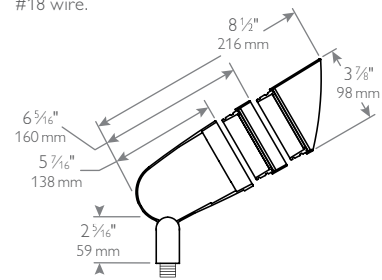

B4

Aluminum Bullet



B4ALED18NFWS

- A** Black
- G** Verde
- H** Bronze

Series	Finish	Lamp	Optics	CCT	Shroud
B4	<input type="checkbox"/>	LED18	<input type="checkbox"/>	W	<input type="checkbox"/>
B4 Aluminum Bullet	A Black G Verde H Bronze	LED18 19W	NF Narrow Flood SP Spot	W Warm	S Short L Long

Fixture will be shipped with lamp installed. Lamp not sold separately.

Features

- 120 Volt
- PAR38 LED Lamp
- 1/2" NPS fitter

Housing

Die-cast aluminum with fully-adjustable swivel arm and vibration-proof locking teeth.

Shroud

Die-cast aluminum, provided with lens and silicone O-ring. Either long or short shroud is required.

LED

- 25,000 hours life (no mercury).
- 19W lamp with 15° and 25° beam spread.
- Color temp (CCT): warm white (3,000K nominal). Lamp only sold integral to B4.

Finish


Thermoset powder coated in; black, bronze or hand-rubbed verde antiqued over black.

Optics

Clear flat tempered glass included with shroud.

Labels

ETL and cETL listed.

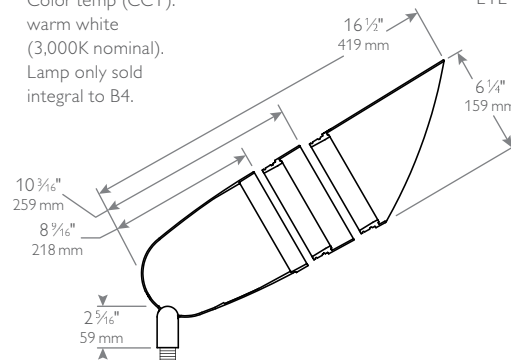

LED Accent lighting

B_4

Aluminum Bullet

Series	Beam	Size	CCT	Accessories	Finish	Shroud
B	<input type="checkbox"/>	4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	L
B Aluminum Bullet	M Medium N Narrow W Wide	4	W Warm C Cool	B IBLR Iced Blue Lens S IMSLR Multidirectional Spread Lens L ILSLR Linear Spread Lens H ICGR Honeycomb Louver N None	A Black G Verde H Bronze	L Long

Features

- 120 Volt
- ½" NPS fitter
- >80 CRI

Housing

Die-cast aluminum with fully-adjustable swivel arm and vibration-proof locking teeth.

LED

- 50,000 hours life (at 25°C ambient temperature and 70% lumen maintenance).
- Color temp (CCT): 3,000K or 4,000K

Finish

Thermoset powder coated in; black, bronze or hand-rubbed verde antiqued over black.

Optics

Clear flat tempered glass included with shroud.

Accessory adaptor

LEDADP: Internal accessory adaptor ring is required for use with internal accessories.

IP rating


IP66 Dust tight and sealed against direct jets of water.

Electrical

13.7W consumed (total fixture consumption). Integral SmartSelect electronic driver 120-277 VAC 50-60hz auto sensing. Integral over-voltage, over-current and short circuit protection (auto-recovery).

Wiring

Pre-wired with a 3ft. pigtail and a quick connector for easy hookup to the supply cable.

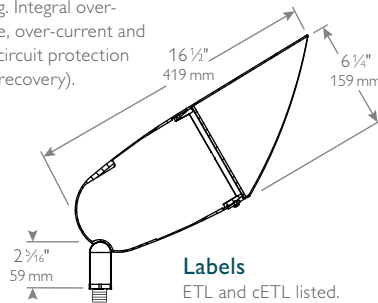

Labels

ETL and cETL listed.



BM4WNAL

- A** Black
- G** Verde
- H** Bronze

Series	Finish	Lamp	Optics	CCT	Shroud
BT1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
BT1 Aluminum Bullet	A Black H Bronze	LED4 5.5W	NF Narrow Flood	W Warm	S Short L Long
		LED7 7W	SP Spot FL Flood NF Narrow Flood	W Warm C Cool*	S Short L Long

Fixture will be shipped with lamp installed. Lamp not sold separately.
* Cool (C) CCT only compatible with Flood (FL) Optics configuration.

Features

- 120 Volt
- MR16 LED Lamp
- ½" NPS fitter
- Integral stepdown transformer

Housing

Die-cast aluminum with fully-adjustable swivel arm and vibration-proof locking teeth.

Shroud

Fully-rotatable, gasketed, cast aluminum.

LED

- 25,000 hours life (no mercury).
- 5.5W lamp with 24° beam spread. Color temp (CCT): warm white (2,700K nominal).
- 7W lamp with 15°, 24° or 36° beam spread. Color temp (CCT): cool white (4,000K nominal) or warm white (2,700K nominal). Lamp only sold integral to BT1.

Finish

Thermoset powder coated in; black or bronze.

Optics

Clear, tempered glass.

Wiring

Pre-wired with #18AWG black, white and ground wire.

Electrical

Stepdown transformer reduces line voltage to 12V. Transformer is potted/encapsulated and features thermal overload protection. Can be used with energy-efficient halogen lamp

Socket


Ceramic bi-pin (GU5.3).

Labels

ETL and cETL listed.



BT1ALED7FLCL

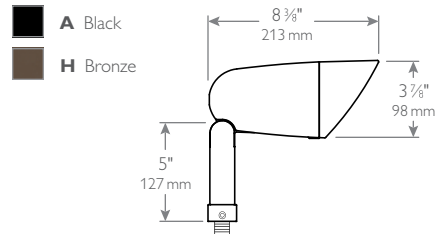

- A** Black
- H** Bronze

LED Accent lighting


BT5016

Aluminum Bullet



BT5016HLED4NFW

- A** Black
- H** Bronze



Series	Finish	Lamp	Optics	CCT
BT5016	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
BT5016 Aluminum Bullet	A Black H Bronze	LED4 5.5W	NF Narrow Flood	W Warm
		LED7 7W	SP Spot FL Flood NF Narrow Flood	W Warm C Cool*

Fixture will be shipped with lamp installed. Lamp not sold separately.
* Cool (**C**) CCT only compatible with Flood (**FL**) Optics configuration.

Features

- 120 Volt
- MR16 LED Lamp
- 1/2" NPS fitter
- Integral stepdown transformer

Housing

Die-cast marine-grade aluminum with fully-adjustable swivel arm and vibration-proof locking teeth.

Shroud

Fully-rotatable, gasketed, cast marine-grade aluminum.

LED

- 25,000 hours life (no mercury).
- 5.5W lamp with 24° beam spread. Color temp (CCT): warm white (2,700K nominal).
- 7W lamp with 15°, 24° or 36° beam spread. Color temp (CCT): cool white (4,000K nominal) or warm white (2,700K nominal). Lamp only sold integral to BT5016.

Finish

Thermoset powder coated in; black or bronze.

Optics

Clear tempered glass affixed at 10° angle for natural cleaning.

Wiring

Pre-wired with #18 AWG black, white and ground wire.

Electrical

Stepdown transformer reduces line voltage to 12V. Transformer is potted/encapsulated and features thermal overload protection. Can be used with energy-efficient halogen lamp.

Socket

Ceramic bi-pin (GU5.3).

Labels

ETL and cETL listed.


BU3

Composite Bullet



BU3GLE13NFW

- A** Black
- G** Verde
- H** Bronze

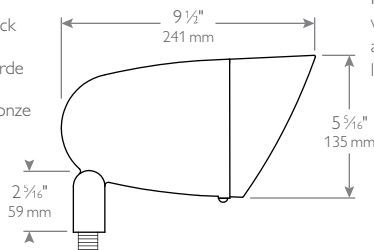

Series	Finish	Lamp	Optics	CCT
BU3	<input type="checkbox"/>	LED13	NF	<input type="checkbox"/>
BU3 Aluminum Bullet	A Black G Verde H Bronze	LED13 13W	NF Narrow Flood	W Warm C Cool

Fixture will be shipped with lamp but not installed. Lamp not sold separately.

Features

- 120 Volt
- PAR30 LED Lamp
- 1/2" NPS fitter
- Long shroud included

Housing

One-piece injection molded Ultem High Performance Polymer with fully-adjustable swivel arm and vibration-proof locking teeth.

LED

- 25,000 hours life (no mercury).
- 13W lamp with 25° beam spread. Color temp (CCT): cool white (4,000K nominal) or warm white (2,700K nominal). Lamp only sold integral to BU3.

Finish

Color impregnated material in black, bronze, or hand-rubbed verde antiqued over black.

Wiring

Pre-wired with high temperature #18 wire.

Socket

High temperature porcelain medium base..

Labels

ETL and cETL listed.

LED Accent lighting

MA3 Aluminum Bullet

Series	Optics	Source	CCT	Finish	Shroud
MA3	<input type="checkbox"/>	D	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
MA3 Aluminum Bullet	SP Spot FL Flood	D LED	W Warm C Cool	A Black H Bronze	L Long 45° (optional)

Features

- 120 Volt
- 6.4 total watts
- ½" NPS fitter

Housing

Precision machined aluminum from 6061-T6 material. Stainless Steel fasteners.

LED

- 35,000 hours life (at 30°C ambient temperature and 70% lumen maintenance).
- Color temp (CCT): 3,000K or 4,000K

Finish

Thermoset powder coated in; black or bronze.

Optics

Two beam spreads (spot - 20°, flood - 40°).

Wiring


Pre-wired with high temperature #18 wire. Input voltage range (VAC) 120-277.

IP rating

IP65 Completely dust-tight and sealed to withstand low pressure jets of water from any direction.

Labels

ETL and cETL listed.

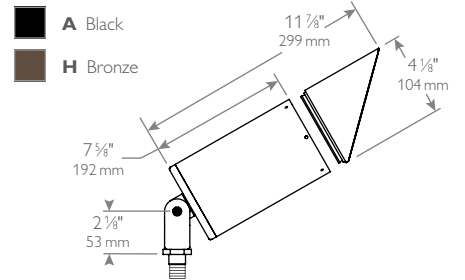

- A** Black
- H** Bronze

B3 Aluminum Bullet

Series	Finish	Lamp	Optics	CCT
B3	<input type="checkbox"/>	LED13	NF	<input type="checkbox"/>
B3 Aluminum Bullet	A Black G Verde H Bronze	LED13 13W	NF Narrow Flood	W Warm C Cool

Fixture will be shipped with lamp installed. Lamp not sold separately.

Features

- 12 Volt
- PAR30 LED Lamp
- ½" NPS fitter

Housing

One-piece injection molded Ultem High Performance Polymer with fully-adjustable swivel arm and vibration-proof locking teeth.

Shroud

Long shroud included.

LED

- 25,000 hours life (no mercury).
- 13W lamp with 25° beam spread.
- Color temp (CCT): warm white (2,700K nominal). Lamp only sold integral to B3.

Finish

Color impregnated material in black or bronze, hand-rubbed verde antiqued over black.

Wiring


Pre-wired with high temperature #18 wire.

Socket

High temperature porcelain medium base.

Labels

ETL and cETL listed.

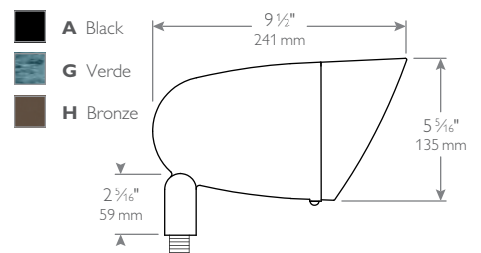


- A** Black
- G** Verde
- H** Bronze

LED Line Voltage

FL-50

Ciello



Luminaire (see below)	A		B		C		D		E		Weight	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	lbs	kg
FL-50-SP	3 1/2"	89	29 1/2"	750	4" sq.	102	1/2" OD	13	2" OD	51	2.5	1.1
FL-50-SM	3 7/8"	98	4 7/8"	124	12 7/8"	327	n/a	n/a	n/a	n/a	1.25	.5
FL-50-JBRS	5 1/8"	130	5 7/8"	149	3 1/4"	82	4 3/4"	120	n/a	n/a	1.5	.7
FL-50-UD	5 1/4"	133	3 1/4"	82	7"	178	1 1/8"	41	8"	203	3.0	1.4

Series	Wattage	Lamp	Voltage	CCT	Finish	Options
FL-50						
FL-50 Ciello	1X5.5W	MR16	120/12 120/12 V⁴	WW Warm	BK Black BZ Bronze WH White GR Green GY Gray NA Natural Aluminum CC Custom Color	Mounts UD Up/Down Mount ¹ STNM Stanchion Mount SM Spike Mount ³ Posts SP Straight Post SP Straight Post ¹ Junction Boxes JBRS Surface Mount ² JBRC Conduit Mount

1. The UD option requires a single gang 2" x 4" junction box.
 2. The JBRS option requires a 4" octagonal junction box.

3. The SM option is available for LV (12V) and PTB applications only.
 4. 120/12 uses a transformer which requires a JBRS or other suitable housing.

Features

- 120 Volt
- MR16 LED Lamp
- Integral stepdown transformer

Housing

Lamp Housing

Die-cast aluminum housing and swivel that allows a 75° vertical tilt adjustment on the Up/Down, wall mount and Spike mount housings and 165° vertical tilt adjustment on Straight post mounting options.

Transformer Housing

Transformer is integral with all versions when 120, 220-240 or 277 is specified. Standard transformer is electronic with 120, 220 or 277 volt primary and 12 volt secondary. A JBRS surface mount junction box or other suitable housing must be specified with this feature.

Lens Ring

Die cast aluminum mounted to lamp housing with three stainless steel cap screws. Clear flat tempered glass is standard.

Lamp Holder

Porcelain 2-pin GU5.3 or GY6.35.

Finish


Thermoset powder coated in; black, bronze, white, green, green, gray or natural aluminum. Electrostatically applied and bonded by heat fusion thermosetting (CC available upon request).

Options

The following options are available: Wall mount up/down dual head (UD), ground mount mini straight post (SP) and (SM) Spike mount.


Labels

ETL and CETL listed for wet location and meets IP65 standard, dust-tight and water-jet proof.

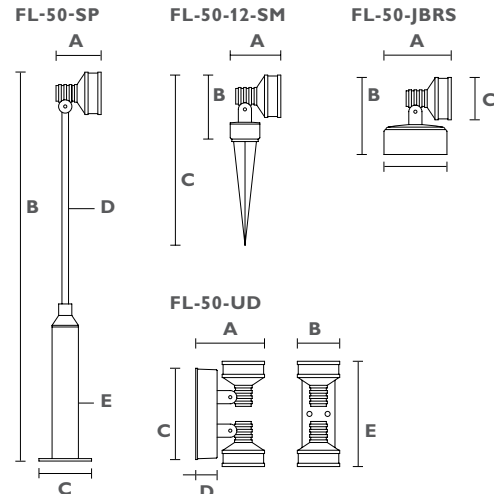

LED Line Voltage

FL-51 Ciello

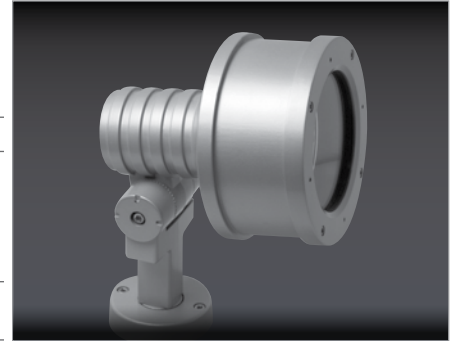

Luminaire	A		B		C		D		E		F		G		Weight	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	lbs	kg
(see below)																
FL-51	7 5/8"	193	6 1/2"	165	10 1/4"	261									7	3.2
FL-51-CBH	7 5/8"	193	6 1/2"	165	10 1/4"	261	12"	305							15	6.8
FL-51-CBH-MV	13 1/8"	336	6 1/2"	165	10 1/4"	261	12"	305							16	7.3
EEBH									5 1/2"	141	8"	204	2 1/2"	65	7	3.1
FL-51-UD	16 1/4"	413							10 3/8"	264	6"	152	3 1/2"	89	24	10.9
WMS/WMR (up to 39W)									6 3/8"	162			3 1/2"	89	12.5	5.7
WMS/WMR (up to 70W)									9"	228			5"	127	12.5	5.7

Series	Wattage	Lamp	Voltage ¹	Optics ²	Finish	Options
FL-51						
FL-51 Ciello	1X4W	MR16	120/12 120/12V⁷	WW Warm	BK Black BZ Bronze WH White GR Green GY Gray NA Natural Alum. CC Custom Color	MOUNTS UD Up/Down Mount STNM Stanchion Mount ³ WMR Recessed Wall Mount ⁶ WMS Surface Wall Mount ^{6,6} BALLAST HOUSINGS CBH Composite EEBH Electronic Elliptical ⁴ JUNCTION BOXES JBRTM Tree Mount ³ JBS Square Mount ³ OTHERS MV Medium Visor ⁵ HL Internal Hex Cell Louver LV Low Voltage DK Designer Knuckle CP Curved Post SA Straight Arm SPREAD LENSES LSL Linear PSL Prismatic

- Consult factory for other voltages.
- Consult factory for other finishes.
Powder coat paint standard.
- Remote ballast required.
- Specify Junction Box Mounting or Surface Conduit Connection.
- Care should be taken if these options are used in an up aiming orientation as debris can collect inside and obstruct the light and cause thermal problems. Consult factory for more information.
- A smaller version of the WMR and WMS is available for 39W HID and below on request.
- 120/12 uses a transformer which requires a WMS or other suitable housing.

Features

- 120 Volt
- MR16 LED Lamp
- Integral stepdown transformer

Housing

Fixture/Knuckle

The housing and knuckle are constructed of die cast aluminum with a minimum 1/8" thickness. Knuckle comes with 1/2" NPT threads for mounting to standard junction boxes or with an additional cast swivel for mounting to the available ballast housings. The knuckles provide 142° vertical (52° down, 90° up) and 360° horizontal adjustability.

Lens

Clear tempered glass 3/16" thick, sealed to lens frame with injection molded silicone gasket.

Lens Frame

Die cast aluminum minimum thickness of 1/8". Attached to fixture housing with four captive stainless steel 8-32 socket cap screws.

Lamp Holder

Porcelain 4kv pulse rated medium base for HID and Incandescent sources.

Finish

Thermoset powder coated in; black, bronze, white, green, gray or natural aluminum. Electrostatically applied and bonded by heat fusion thermosetting (CC available upon request).

Options

The following options are available: Medium Visor (MV), Linear Spread Lens (LSL), Prismatic Spread Lens (PSL), Internal Hex Cell Louver (HL).


Reflectors

Spun aluminum highly specular finish for either type SPT spot, FLD flood or MFLD medium flood for T6 lamps. All reflectors are provided with an adjustable external focusing mechanism.


Labels

ETL and CETL listed for wet location and meets IP65 standard, dust-tight and water-jet proof.


FL-51-CBH




FL-51-CBH-MV




FL-51-UD



WMS/WMR



EEBH




LED Flood lighting

WAM1D/WBM1D

Aluminum Flood light



- A** Black
- B** White
- G** Verde
- H** Bronze

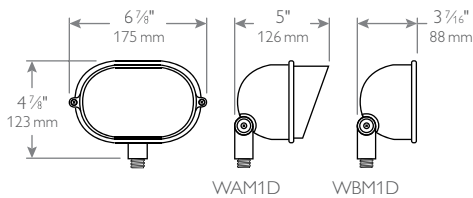

Series	CCT	Lens	Finish
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
WAM1D Aluminum Flood light with shroud WBM1D Aluminum Flood light without shroud	W Warm C Cool	F Frosted Lens - Clear Lens	A Black B White G Verde H Bronze

Features

- 120 Volt
- 12 total watts
- 1/2" NPS fitter
- >80 CRI

Housing

Die-cast aluminum with fully-adjustable swivel arm with vibration-proof locking teeth.

Shroud

Gasketed, cast aluminum available (WAM1D).

Finish

Thermoset powder coated in; black, white, bronze or hand-rubbed verde antiqued over black.

LED

- 50,000 hours life at 25°C ambient temperature and 70% lumen maintenance.
- Color temp (CCT): cool white (4,000K) or warm white (3,000K).

Optics

Clear or frosted tempered glass. 150° LED spread (equivalent to wide flood).

Wiring

Pre-wired with a 3 ft. pigtail and a quick connector for easy hookup to the low voltage supply cable. Pre-wired with #18 AWG black, white and ground wire.

Electrical

Smart Select Electronic Driver 120 to 277 VAC input; 50-60Hz; auto-sensing.

IP rating

IP66 Completely dust-tight and sealed against direct jets of water.






Labels

ETL and cETL listed.



LED Step and Aisle lighting

96 Line Aluminum Step light

Faceplates	Mounting	Wattage	Voltage	Finish
				
Composite 960C Round in white 961C Round in black 962C Square in white 963C Square in black	S Wall or Ceiling Surface Mount	4 4W LED 3000K (85 CRI)	UNIV 120V-277V (50 or 60 hz)	BLP Black* BRP Bronze Paint WP White Paint NP Black OC Optional Color Paint Specify RAL designation SC Special Color Paint Must supply color chip.
Aluminum 960A Round 962A Square				

The 96 Line is UL and CUL listed for Wet Locations.
 * Standard color of composite material.





Four incredible watts of illumination

A remarkable advancement in architectural lighting built around the latest in LED technology – the 96 Line. With an integrated optical system that relies on a single four-watt LED, this minimally scaled luminaire achieves a remarkable level of illumination. In pedestrian thoroughfares, and along stairways, 96 Line is an exciting design option.

The die cast aluminum base and LED optical system are an integrated package. To replace the LED, simply remove the faceplate, and install a new module. Plug and play. Fast, simple, easy does it.

An integrated LED, driver and optic allows the 96 Line to achieve maximum performance from minimal power.

Integral leveling bubble simplifies installation, assuring perfect alignment of each 96 Line steplight.

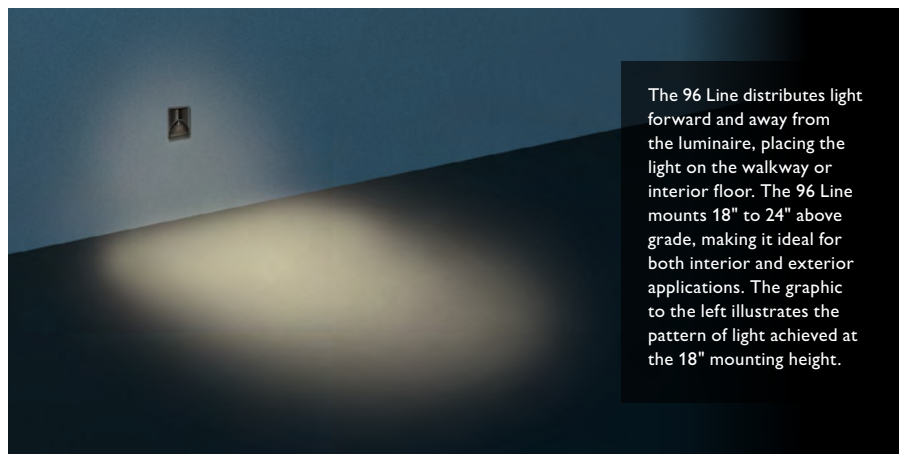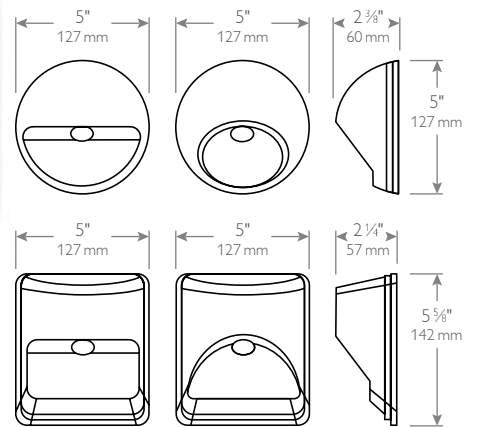


Subtle downlight wall washing with wide and uniform distribution are noteworthy characteristics of the 96 Line.

Mounting

Mounting over a 3.5" or 4" recessed octagonal box

Mounting over a 4" Recessed Square Box

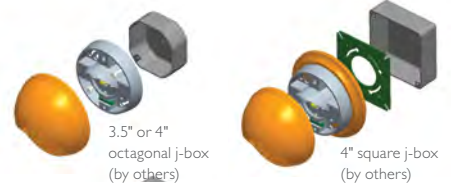

Two choices of faceplates



A composite injection-molded version with an integral black finish, or die cast aluminum in the 960 and 962 styles. All faceplates are lightly textured and are provided with a UV-resistant, semi-gloss finish in standard, optional or special colors. Featuring soft corners, uniform distribution, concealed mounting hardware and consistent visual styling cues, the 96 Line is a smart and practical choice for step and aisle lighting.



LED Step lighting



RSF2

Polycarbonate Step light

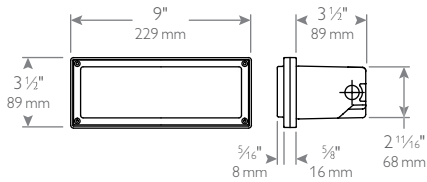



RSS2

Polycarbonate Step light

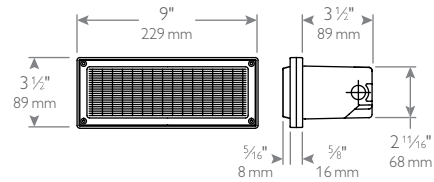



RSC2

Aluminum or Cast Bronze Step light

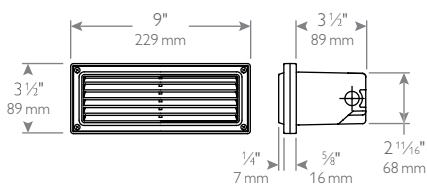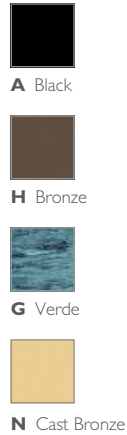


RSV2

Aluminum or Cast Bronze Step light

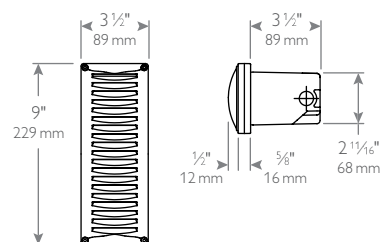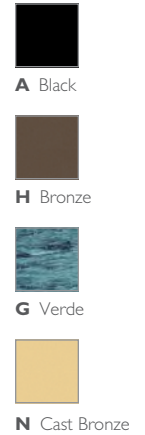


LED Step lighting

RS Step lights

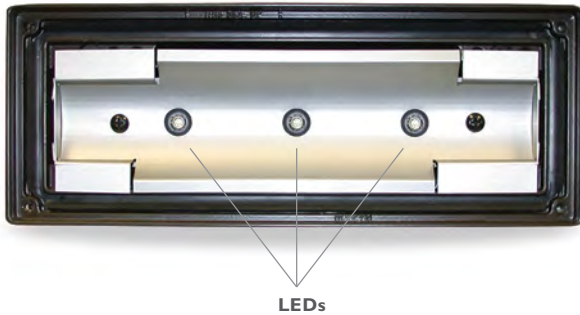


Photometry

Three 1W LEDs
2 foot mounting height




Photometry

Five 1W LEDs
2 foot mounting height



Bottom view of all



Series	Finish	Optics	Lamp	Lens	Voltage
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> E
RSF2 Polycarbonate Step light	A Black H Bronze	L5 Opal lens	D3 (3) 1W LEDs D5 (5) 1W LEDs	W Warm amber	E 120V
RSS2 Polycarbonate Step light	A Black H Bronze	K5	D3 (3) 1W LEDs D5 (5) 1W LEDs	- None	E 120V
RSC2 Aluminum or Cast Bronze Step light RSV2 Aluminum or Cast Bronze Step light	A Black G Verde H Bronze N Cast Bronze	K5 Aluminum or Cast Bronze louvers	D3 (3) 1W LEDs D5 (5) 1W LEDs	W Warm amber	E 120V
Series	Finish	Option			
<input type="checkbox"/> RS2	<input type="checkbox"/>	<input type="checkbox"/>			
RS2	A Black G Verde H Bronze N Cast Bronze	HO Housing only (pre-shipment)			

* Use when Housing Only (**HO**) is ordered for pre-shipment to complete catalog number of fixture without housing.

Housing

Die-cast aluminum back box contains less than 0.3% copper to prevent corrosion in concrete or masonry applications.

Trim ring

- Die-cast aluminum trim contains less than 0.3% copper to resist corrosion.
- Cast bronze fixture has polycarbonate, color-impregnated, dark bronze finish (RSC2 & RSV2).

Reflector

Specular aluminum formed reflector.

Faceplates

Cast louver

- Die-cast copper-free aluminum with 45° cutoff, with frosted tempered glass.
- Cast bronze louver is natural cast bronze with frosted tempered glass (RSC2 and RSV2 only).
- Amber Lens option (3000k)

Opal lens

- Opal UV stabilized injection molded polycarbonate with frosted glass siliconed on inside for durability.

Louvers

- Clear UV stabilized injection molded polycarbonate with 45° louvered screen insert.

Finish

Polycarbonate

Color impregnated composite material in; black or bronze (RSF2 / RSS2).

- Aluminum** parts have zinc-rich primer and for durability a thermoset powder coat in; black, bronze or hand-rubbed verde antiqued over black (RSC2 / RSV2).

- Natural cast bronze** finish (RSC2 / RSV2).

LED

- Delivers 70% lumen maintenance at 50,000 hours.
- Cool white (6,300K nominal).
- Amber lens option (3,000K).
- (3) 1W LEDs: 4W total.
- (5) 1W LEDs: 5W total.

ADA compliant

Compliant when used in indoor and outdoor wall applications.

Wiring

Supply wires connect directly to the quick connect on the integral power supply.

Accessories

All units supplied with mounting hardware for concrete pour installation. If other mounting kits are required, order accessory.

Construction mounting kits



- MAKM** Masonry kit
- MAKNS** New Stud Wall kit
- MAKES** Existing Stud Wall kit

IP rating

IP66 Dust tight and sealed against direct jets of water.

Labels

ETL and cETL listed.

LED In-ground lighting

LED Line Voltage



LED In-ground lighting

i1.5

Composite Inground with Trim Ring

Integrated Lamp

Series	Finish	Lamping	Optics	CCT	Voltage
i1.5					
i1.5 Composite Inground	N Cast Bronze SS Stainless Steel	LED10 10W MR16 Bi-Pin	SP Spot	W Warm	120 120V
			FL Flood	W Warm C Cool	277 277V
		LED13 13W PAR30 Short	SP Spot	W Warm	120 120V
			FL Flood	W Warm C Cool	

Fixtures with PAR30 LED lamp will be shipped with fixture loose, not installed.
Fixtures with MR16 lamp will be shipped with lamp installed. Lamps not sold separately.

Integrated Module

Series	Finish	Output	CCT
i1.5			
i1.5 Inground Trim Ring	N Cast Bronze SS Stainless Steel	SP Spot NF Narrow Flood FL Flood	W Warm C Cool

Must order LEDADP, Adaptor Ring if ordering an internal accessory.

Features

- 120 Volt
- MR16 LED Lamp
- PAR30S LED Lamp
- LED module

Housing

Single-piece compression molded, fiberglass reinforced polyester composite housing. Separate sealed compartments. Potted factory seal with anti-wicking wiring. Hinged lens ring with captive lens and fasteners. Only two fasteners required to secure lens ring. UL Listed silicone-filled wire nuts provided—no encapsulant required.

Trim ring

Natural cast bronze or cast stainless steel. Secured with stainless steel screws (supplied standard).

Rock guard



Natural cast bronze or cast stainless steel. Secured with stainless steel screws (sold separately).

Half dome



Field adjustable for directional glare control. Natural cast bronze or cast stainless steel. Secured with stainless steel screws (sold separately).

Lens

Clear convex, tempered borosilicate for high-impact resistance. 3,000lb live-load rated, drive-over.

LED lamp

- 25,000 hours life (no mercury).
- 10W with 15° or 36° beam spread.
- 13W with 22° or 25° beam spread (only sold integral to i1.5 fixture).
- Color temp. (CCT): cool white (4,000K nominal) or warm white (2,700K nominal).

LED module

4,000K or 4,000K CCT. 17 Total Watts consumed. Approx. 50,000 hours of operation life at 25°C ambient temperature and 70% lumen maintenance.

Socket

EnduraLED: MR16 Bi-pin. EnduraLED: Medium Base.

Optics

Available with spot, narrow flood or flood beam pattern. EnduraLED lamps: spot or flood beam pattern.

Gasket

Single-piece wrap around molded 100% silicone for lens assembly. Gasket for junction box cover is single-piece die-cut neoprene.

Aiming

15° either side of vertical and full 360° rotation. Angle degree marks for precise vertical aiming with tool-less aiming.

ADA compliant

Compliant when used in concrete and flush-mounted with CPS15.

Electrical

LED module is a key-slotted ballast assembly with quick disconnects mounted to cast aluminum bracket for easy maintenance. e-Vision electronic ballasts automatically detect 120-277 volts, 50/60 Hz, HPF. Ballasts provide ± 5% lamp power regulation with ± 10% input voltage regulation. Incandescent (MR16) - utilizes stepdown transformer.

IP rating


IP66/68 to 1M (3.28FT): Dust-tight and dual rated – sealed against direct jets of water and against continuous immersion up to a depth of 1 meter (3.28 feet).

Labels

ETL and cETL listed.



- N Cast Bronze
- SS Stainless Steel

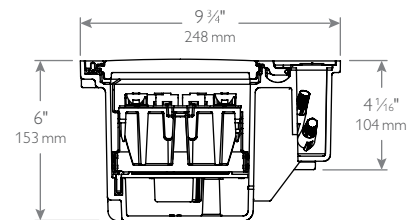

LED Line Voltage


i2.5

Composite Inground with Trim Ring



i2.5NLED12SPW

- N** Cast Bronze
- SS** Stainless Steel



Series	Finish	Lamping	Optics	CCT
i2.5	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
i2.5 Composite Inground	N Cast Bronze SS Stainless Steel	-	SP Spot	W Warm*
			NF Narrow Flood	C Cool*
			FL Flood	
		LED12 12W	SP Spot	W Warm
			NF Narrow Flood	C Cool
		LED13 13W PAR30 Long	NF Narrow Flood	W Warm

* Must order LEDADP, Adaptor Ring if ordering an internal accessory.
Fixtures with PAR30 LED lamp will be shipped with fixture loose, not installed.
Lamps not sold separately.

Features

- 120 Volt
- PAR30L LED
- 17 total watts

Housing

Single-piece compression molded, fiberglass reinforced polyester composite housing. Separate sealed compartments. Potted factory seal with anti-wicking wiring. Hinged lens ring with captive lens and fasteners. Only two fasteners required to secure lens ring. UL Listed silicone-filled wire nuts provided—no encapsulant required.

Trim ring

Natural cast bronze or cast stainless steel. Secured with stainless steel screws (supplied standard).

Rock guard

Natural cast bronze or cast stainless steel. Secured with stainless steel screws (sold separately).

Half dome

Field adjustable for directional glare control. Natural cast bronze or cast stainless steel. Secured with stainless steel screws (sold separately).

Lens

Clear convex, tempered borosilicate for high-impact resistance. 3,000lb live-load rated, drive-over.

LED lamp

- 25,000 hours life (no mercury).
- 12W with 22° or 25° beam spread. Color temp. (CCT): cool white (4,000K nominal) or warm white (2,700K nominal)
- 13W with 25° beam spread (only sold integral to i2.5 fixture). Color temp. (CCT): warm white (2,700K nominal).

Socket

Incandescent PAR30 Long EnduraLED: Medium Base.

Optics

Available with spot, narrow flood or flood beam pattern. EnduraLED lamps: spot or flood beam pattern.

Gasket

Single-piece wrap around molded 100% silicone for lens assembly. Gasket for J-box cover is single-piece die-cut neoprene.

LED module

4,000K CCT or 3,000K CCT. Approx. 50,000 hours of operational life (at 25°C ambient temperature and 70% lumen maintenance). >80CRI.

Aiming

15° either side of vertical and full 360° rotation. Angle degree marks for precise vertical aiming with tool-less aiming.

ADA compliant

Compliant when used in concrete and flush-mounted with CPS15.

Electrical

LED module is a key-slotted ballast assembly with quick disconnects mounted to cast aluminum bracket for easy maintenance. e-Vision electronic ballasts automatically detect 120-277 volts, 50/60 Hz, HPF. Ballasts provide ± 5% lamp power regulation with ± 10% input voltage regulation. Incandescent (MR16) - utilizes stepdown transformer.

IP rating

IP66/68 to 1M (3.28FT): Dust-tight and dual rated – sealed against direct jets of water and against continuous immersion up to a depth of 1 meter (3.28 feet).

Labels

ETL and cETL listed.

LED Line Voltage

i3.5

Composite Inground with Trim Ring

Series	Finish	Lamping	Optics	CCT
i3.5	N			
i3.5 Composite Inground	N Cast Bronze	–	SP Spot NF Narrow Flood FL Flood	W Warm C Cool
		LED18 19W	SP Spot NF Narrow Flood	W Warm

Fixtures with PAR38 LED lamp will be shipped with fixture loose, not installed.
Lamps not sold separately.

Features

- 120 Volt
- PAR38L LED
- 18 total watts

Housing

Single-piece compression molded, fiberglass reinforced polyester composite housing. Separate sealed compartments. Potted factory seal with anti-wicking wiring. Hinged lens ring with captive lens and fasteners. Only two fasteners required to secure lens ring. UL Listed silicone-filled wire nuts provided—no encapsulant required.

Trim ring

Natural cast bronze. Secured with stainless steel screws (supplied standard).

Rock guard

Natural cast bronze. Secured with stainless steel screws (sold separately).

Half dome

Field adjustable for directional glare control. Natural cast bronze. Secured with stainless steel screws (sold separately).

Lens

Clear convex, tempered borosilicate for high-impact resistance. 3,000lb live-load rated, drive-over.

LED lamp

- 25,000 hours life (no mercury).
- 19W lamp with 15° or 25° beam spread (only sold integral to i3.5 fixture).
- Color temp. (CCT): warm white (3,000K nominal).

Socket

Incandescent, PAR38 and MH E-17: 4kv rated medium base porcelain socket..

Optics

Available with spot, narrow flood or flood beam pattern. EnduraLED lamps: spot or flood beam pattern.

Gasket

Single-piece wrap around molded 100% silicone for lens assembly. Gasket for J-box cover is single-piece die-cut neoprene.

LED module

4,000K CCT or 3,000K CCT. Approx. 50,000 hours of operational life (at 25 Cambiant temperature and 70% lumen maintenance). >80CRI.

Aiming

15° either side of vertical and full 360° rotation. Angle degree marks for precise vertical aiming with tool-less aiming.

ADA compliant

Compliant when used in concrete and flush-mounted with CPS35.

Electrical

LED module is a key-slotted ballast assembly with quick disconnects mounted to cast aluminum bracket for easy maintenance. e-Vision electronic ballasts automatically detect 120-277 volts, 50/60 Hz, HPF. Ballasts provide ± 5% lamp power regulation with ± 10% input voltage regulation. Incandescent (MR16) - utilizes stepdown transformer.

IP rating


IP66/68 to 1M (3.28FT): Dust-tight and dual rated – sealed against direct jets of water and against continuous immersion up to a depth of 1 meter (3.28 feet).

Labels

ETL and cETL listed.




N Cast Bronze

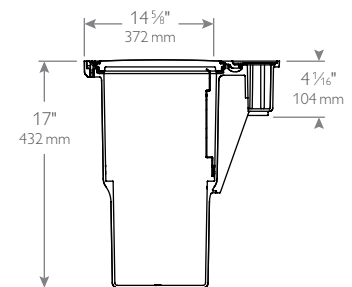

LED In-ground lighting

iT216

Composite Inground with Trim Ring

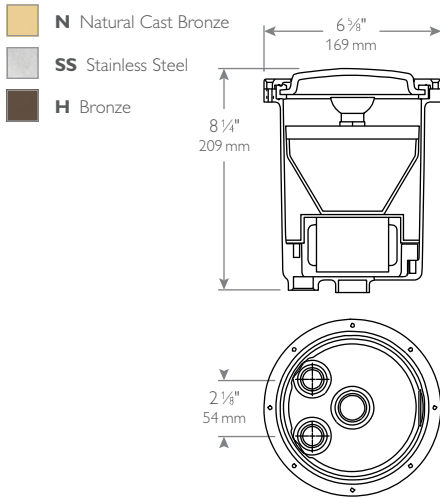

Series	Guard	Finish	Lamping	Optics	CCT
iT216	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
iT216 Composite Inground	- None	N Natural Cast Bronze	LED4 5.5W	NF Narrow Flood	W Warm
		SS Stainless Steel	LED7 7W	SP Spot	W Warm
	G Rock Guard	H Bronze	NF Narrow Flood	FL Flood	C Cool*
		N Natural Cast Bronze	LED4 5.5W	NF Narrow Flood	W Warm
		H Bronze	LED7 7W	SP Spot	W Warm
				NF Narrow Flood	C Cool
				FL Flood	

Fixture will be shipped with lamp installed. Lamp not sold separately.
 * Cool (C) CCT only compatible with Flood (FL) Optics configuration.

Features

- 120 Volt
- MR16 LED Lamp

Housing

Single-piece compression molded, fiberglass reinforced polyester composite housing.

Trim ring

Compression molded polyester, or die-cast stainless steel or natural cast bronze.

Rock guard

Directional for glare control. Compression molded polyester or natural cast bronze.

Lens

Clear convex, tempered soda-lime glass for high impact resistance. 2,200lb live-load rated, standard walkover.

LED

- 5.5W lamp with 24° beam spread.
- 7W lamp with 15°, 24° or 36° beam spread (only sold integral to iT216 fixture).
- Color temp. (CCT): warm white (2,700 nominal) or cool white (4,000K nominal for 7W only).
- 25,000 hours life (no mercury).

Aiming

15° either side of vertical and full 360° rotation. Angle degree marks for precise vertical aiming with tool-less aiming.

Electrical

Integral electronic transformer converts 120v to 12v.

Labels

ETL and cETL listed.

Configurations


With and without rock guard option.



iT216G-H
Bronze Finish with Rock Guard



iT216-N
Natural Cast Bronze Finish



iT216G-N
Natural Cast Bronze Finish with Rock Guard



iT216-SS
Stainless Steel Finish

LED In-ground lighting

i3

Composite Inground with Trim Ring

Series	Guard	Finish	Lamping	Optics	CCT
i3					
i3 Composite Inground	- None G Rock Guard	N Natural Cast Bronze SS Stainless Steel* H Bronze	LED7 8W	NF Narrow Flood	W Warm C Cool

Fixture will be shipped with lamp installed. Lamp not sold separately.
* Rock Guard (G) not compatible with Stainless Steel (SS) Finish configuration.

Features

- 120 Volt
- PAR20 LED Lamp

Housing

Single-piece compression molded, fiberglass reinforced polyester composite housing.

Trim ring

Compression molded polyester, or die-cast stainless steel or natural cast bronze. All trim rings are secured with stainless steel screws.

Rock guard

Directional for glare control. Compression molded polyester or natural cast bronze.

Lens

Clear convex, tempered soda-lime glass for high impact resistance. 2,200lb live-load rated, standard walkover.

LED

- 8W lamp with 25° beam spread (only sold integral to i3 fixture).
- Color temp. (CCT): warm white (2,700 nominal) or cool white (4,000K nominal for 7W only).
- 25,000 hours life (no mercury).

Aiming

15° either side of vertical and full 360° rotation. Angle degree marks for precise vertical aiming with tool-less LOC-AIM®.

Electrical

Standard quad-volt core and coil mounted on key-slotted removable tray with quick connect harness.

IP rating


IP66/68 to 1M (3.28FT): Dust-tight and dual rated – sealed against direct jets of water and against continuous immersion up to a depth of 1 meter (3.28 feet).

Labels

ETL and cETL listed.



- N Natural Cast Bronze
- SS Stainless Steel
- H Bronze

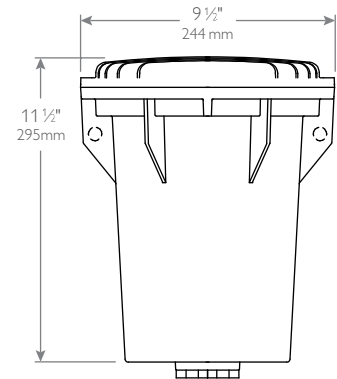

LED Bollard lighting

RD6/RF6 Aluminum Bollard




Series	Finish	Optics	Wattage	CCT	Voltage
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
RD6 Round	A Black	KF Type V Cone	12L 12.5W (LED/Med. Socket)	W Warm	E 120V
RF6 Square	H Bronze I Grey	K5 Type V Refractor		W Warm C Cool	A 120V-277V
		KF Type V Cone	10 25W (10 LED/Module)		

Bollard

The RD6 and RF6 bollard is now equipped with state-of-the-art LED lighting solutions that deliver a better quality of light while also providing energy savings.

Construction

1100-0 spun aluminum alloy head is secured to the bollard tube with a single stainless steel allen head screw providing easy removal for relamping. Easy access to lamp. 6" dia. extruded aluminum with a wall thickness of 0.125".

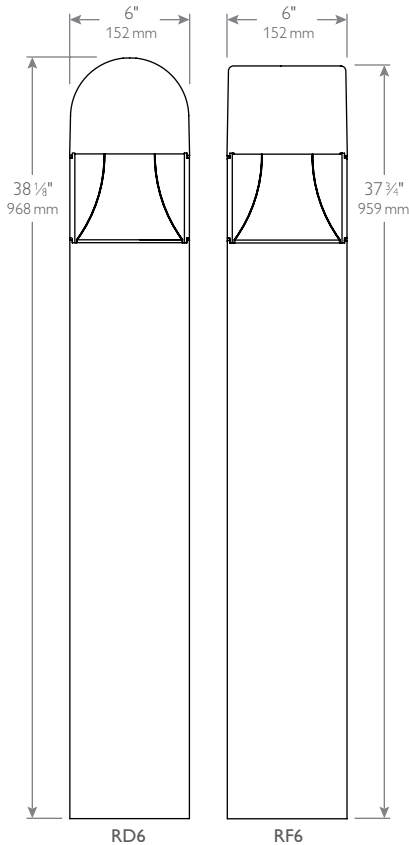


EnduraLED

The Philips EnduraLED A19 lamp is 2700K warm white and delivers 800 lumens and is also dimmable (consult factory for dimming capabilities).

- Lamp life is rated at 25,000 hours.
- 120V, ETL and cETL listed.


Integrated Module

- 1050 mA
- 4,000K (4K) at 100 lumen per LED or 3,000K (3K) at 66 lumen per LED (10 LEDs = 25 Watts).
- Lamp life is rated at 70,000 hours.

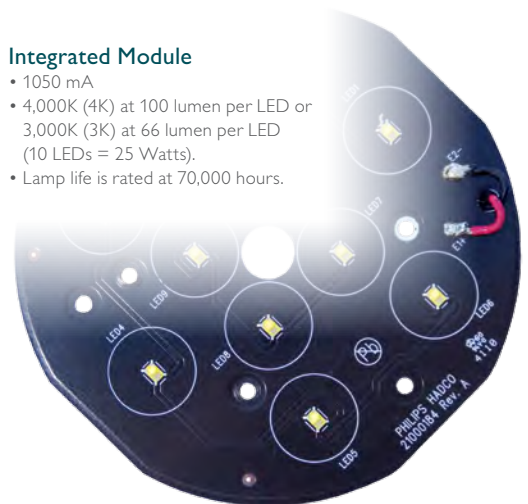

LED Bollard lighting

DB14/DB21/DB30 Aluminum Bollard

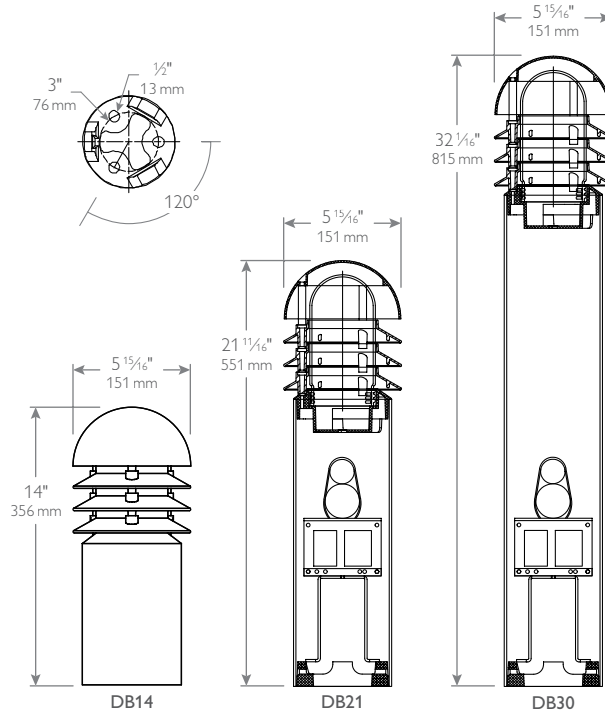

Series	Finish	Finish	Optics	Wattage	Voltage
DB	<input type="checkbox"/>	<input type="checkbox"/>	A0	12L	E
DB Aluminum Bollard	14 14" 21 21" 30 32"	A Black H Bronze	A0 Symmetric	12L 12.5W	E 120V

Upper housing

Die-cast aluminum (including louvers). Head assembly is mounted to lower housing with three (3) stainless steel screws.

Lower housing

Constructed of 5" extruded aluminum (1/8" wall).

Lens

Clear molded glass, threaded against silicone gasket for tight seal.

Finish

Highly weather-resistant CraftStone finish bonded to the aluminum substrate, or durable thermoset polyester powdercoat applied after a five-stage conversion cleaning process. Note: Louvers on CraftStone finishes are powdercoated white. Additional finishes, consult factory.

Socket

Incandescent and HID: medium base. Fluorescent: GX24q-3 or GX24q-4 base.

Gasket

Flat silicone gasket.

Reflector

Highly reflective white paint on spun aluminum rings, mounted on the underside of louvers.

Mounting

Lower casting is secured to anchor foundation by three (3) galvanized steel bolts and nuts. Before installing anchor bolts, contact factory for latest mounting template.

Voltage Caution

Some local interpretation of the NEC Section 210-6 only permits the use of 120 volt fixtures when mounted below 8'. Check with local authorities before specifying alternate voltages.

Electrical

Standard quad-volt core and coil mounted on removable ballast bracket, with quick connect harness, high power factor, dipped in moisture-resistant epoxy coating. Fluorescent uses electronic ballasts.

Labels

ETL and cETL listed.

A Black **H** Bronze

LED Residential lighting

Palermo

Residential lighting

Features

- B57400 = medium fixture
B57600 = large fixture
- Cast aluminum construction.
- All finishes available*
- Clear, frosted, thumb print and linen globes available.

Panels/Lens/Globe

Precision designed, glass globe: linen, thumb print, frosted and clear glass available. Linen Glass Globe (U) is standard.

Lamping

12 total watts consumed; running at 700 mA. 4,000K (4K) color temperature, delivering 100 lumen per LED or 3,000K (3K) delivering 66 lumen per LED (10 LED's). Based on in-situ thermal testing and data from Philips Lumileds and Philips Advance, fixture can be expected to reach 55,000 hours (at >L70 lumen maintenance @ 25°C).


Electrical

Smart Select™ Electronic Driver; 120-277 VAC, 50-60Hz, Auto-sensing. 6kV Surge protection. -40°C to ±50°C Operating temperature. Fixture is pre-wired with 18 AWG black, white, and ground wires. Lantern will be prewired and tested.


Labels

ETL listed.


* See Finishes & Materials in the Quick references section at the beginning of the catalog for Residential finishes.




B57410LED
H: 23"
W: 11 3/4"
Ext: 14 3/4"
T/O: 6 3/4"




B57420LED
H: 22 1/4"
W: 11 3/4"
Ext: 34 1/4"




B57430LED
H: 19 1/4"
W: 11 3/4"
Post is not included



B57460LED
H: 18"
W: 11 3/4"



B57610LED
H: 30 1/4"
W: 15 3/4"
Ext: 18 3/8"
T/O: 8 1/8"



B57620LED
H: 27 3/8"
W: 15 3/4"
H(O/A): 39 3/8"



B57630LED
H: 24 3/8"
W: 15 3/4"
Post is not included



B57660LED
H: 23 7/8"
W: 15 3/4"

LED Residential lighting

Riviera Residential lighting



Features

- B5800 = medium fixture
- All finishes available*
- Clear, frosted, thumb print and linen globes available.
- Cast aluminum construction.

Panels/Lens/Globe

Precision designed, glass globe: linen, thumb print, frosted and clear glass available. Linen Glass Globe (U) is standard.

Lamping

12 total watts consumed; running at 700 mA, 4,000K (4K) color temperature, delivering 100 lumen per LED or 3,000K (3K) delivering 66 lumen per LED (10 LED's). Based on in-situ thermal testing and data from Philips Lumileds and Philips Advance, fixture can be expected to reach 55,000 hours (at >L70 lumen maintenance @ 25°C).

Electrical

Smart Select™ Electronic Driver, 120-277 VAC, 50-60Hz, Auto-sensing, 6Kv Surge protection, -40°C to ±50°C Operating temperature. Fixture is pre-wired with 18 AWG black, white, and ground wires. Lantern will be prewired and tested.


Labels

ETL listed.

* See Finishes & Materials in the Quick references section at the beginning of the catalog for Residential finishes.

2 B58460 LED ASI G W S
 ① ② ③ ④ ⑤ ⑥ ⑦

1. Quantity
2. Model Number
3. Lamp Source
4. Finish Code
5. Panel/Globe Code
6. Wattage, Lamping or other Opts
7. Roof Scrolls

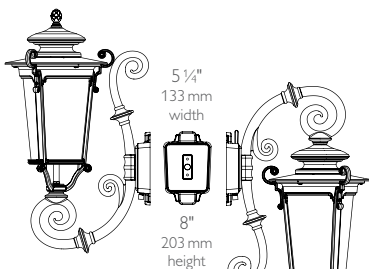

B58410LED

H: 26 3/8"
 W: 11 1/4" dia. or 12 3/4" dia. with scrolls
 Ext: 16" or 16 3/8" with scrolls
 T/O: 17 3/8"

B58412LED

H: 26 3/8"
 W: 11 1/4" dia. or 12 3/4" dia. with scrolls
 Ext: 16" or 16 3/8" with scrolls
 T/O: 9 1/2"




B58420LED

H: 24 1/2"
 W: 11 1/4" dia or 12 3/4" dia with scrolls
 H(O/A): 37 1/4"



B58430LED

H: 27 3/8"
 W: 11 1/4" dia. or 12 3/4" dia. with scrolls
 Post is not included



B58460LED

H: 22 3/8"
 W: 11 1/4" dia. or 12 3/4" dia. with scrolls

LED Line Voltage

Manor

Residential lighting

Features

- Cast aluminum construction with painted finials and spindles.
- All panels and finishes available*
- Clear acrylic panels (except where noted not available).
- Porcelain medium base socket with painted socket cover.
- Higher wattages may be used only with glass panels installed.

Lamping

4,000K (4K) color temperature or 3,000K (3K). Lumileds Rebel LEDs (2) 10 up boards (100 lumens per watt each LED) on aluminum core PCB. Cast aluminum heat sink with sealed lens.

Ballast

Smart select electronic 25 watts, 700MA, 36-volt driver 120-277 VAC; 50-60 Hz; auto sensing with internal 6kv surge protection.

Electrical

Fixture is pre-wired with 18 AWG black, white, and ground wires. Lantern will be prewired and tested.

Labels

ETL listed.

*See Finishes & Materials in the Quick references section at the beginning of the catalog for Residential finishes.













LED Line Voltage

Manor Residential lighting

B4100 series (medium 100w max.)





Standard: Clear acrylic panels.
Optional: 3-light painted candelabra candle cluster (25w max. per socket).

											
B4101 H: 14 3/4" W: 11 3/4" Ext: 11 1/4" T/O: 10 3/4"  5 1/4" x 7 1/2"	B4110 H: 19 3/4" W: 11 3/4" Ext: 12 1/2" T/O: 12 1/4"  4 1/2" x 8 1/4" mount.	B4113* H: 19 3/4" W: 11 3/4" Ext: 12 1/2" T/O: 12 1/4"	B4115 H: 27 3/4" W: 11 3/4" Ext: 12 1/2" T/O: 12 1/4"	B4118* H: 27 3/4" W: 11 3/4" Ext: 12 1/2" T/O: 12 1/4"	B41FSM* H: 20" W: 11 3/4" Ext: 15 1/2" T/O: 10"	B41FRM* H: 17" W: 11 3/4" Ext: 15 1/2" T/O: 10"	B4120 H: 13 1/2" W: 11 3/4" H(O/A): 42 3/4"  4 1/4" dia. mount.	B2550* H: 14 3/4" W: 11 3/4"	B4130 H: 18 1/2" W: 11 3/4" Post is not included.	B4131* H: 18 1/2" W: 11 3/4" Post is not included.	B4150 H: 19 3/4" W: 32 3/4" Ext: 12 1/4" T/O: 12 1/6"  4 1/2" x 8 1/4"

B5500 series (large 100w max.)

Standard: Clear acrylic panels and frosted chimney.






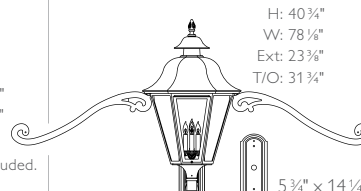





Optional: 3 or 4-light painted candelabra candle cluster (25w max. per socket).

												
B5501* H: 22 3/4" W: 13 1/4" Ext: 13 1/4" T/O: 14 3/4"  5 1/4" x 7 1/2" mount.	B5501-1* H: 27 3/4" W: 13 3/4" Ext: 13 1/4" T/O: 14 3/4"	B5510 H: 29 3/4" W: 13 3/4" Ext: 13 3/4" T/O: 22 1/2"  4 1/2" x 8 1/4"	B5513* H: 29 3/4" W: 13 3/4" Ext: 13 3/4" T/O: 22 1/2"	B5515 H: 42 1/4" W: 13 3/4" Ext: 13 3/4" T/O: 22 1/2"	B5518* H: 42 1/4" W: 13 3/4" Ext: 13 3/4" T/O: 22 1/2"	B55FSM* H: 30" W: 13 3/4" Ext: 16 1/4" T/O: 20"	B55FRM* H: 24 1/2" W: 13 3/4" Ext: 16 1/4" T/O: 10"	B5520 H: 22 3/4" W: 13 3/4" H(O/A): 50"  8" dia. mount.	B5521** H: 28 1/2" W: 13 3/4"	B5530 H: 28 3/4" W: 13 3/4" Post is not included.	B5531* H: 28 3/4" W: 13 3/4" Post is not included.	B5550 H: 29 3/4" W: 71" Ext: 13 3/4" T/O: 13 1/4"  4 1/2" x 8 1/4"

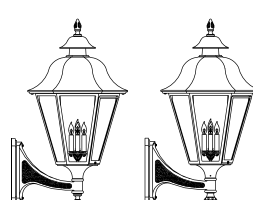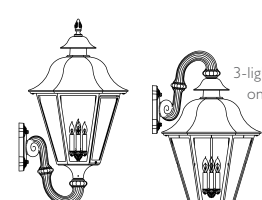B6100 series (extra large 200w max.)

Standard: Clear acrylic panels and frosted chimney - glass not available.

Optional: 4-light painted candelabra candle cluster (25w max. per socket).

							
B6117 H: 40 3/4" W: 21 1/4" Ext: 23 3/4" T/O: 32 3/8"  5 3/4" x 14 1/4" mount.	B6118 H: 52" W: 21 1/4" Ext: 23 3/4" T/O: 32 3/8"	B61FSM H: 39 3/4" W: 21 1/4" Ext: 21 3/4" T/O: 27 1/4"  6 3/4" x 10 1/4" mount.	B61FRM H: 33 1/4" W: 21 1/4" Ext: 21 3/4" T/O: 12 1/2"	B6120 H: 30 1/4" W: 21 1/4" H(O/A): 50"  8" dia.	B6160 H: 43 3/4" W: 21 1/4" Pier base is included.  7 1/2" sq.	B6130 H: 40 1/2" W: 21 1/4" Post is not included.  5 3/4" x 14 1/4"	B6150 H: 40 3/4" W: 78 1/4" Ext: 23 3/4" T/O: 31 3/4"

* Clear beveled glass panels.


** Frosted glass panels are standard and chimney NOT available.

Low Voltage Concrete Installation


Installation of inground fixtures requires special consideration. Proper grading, drainage material and tightly securing the lens and gasket are procedures that are key to a successful inground installation. The following are basic steps in installing inground fixtures in either concrete (using the concrete pour accessory) or soil. For greater detailed instructions, refer to the installation sheet enclosed with each fixture.

Installation process

1. Remove trim ring and lens and install specified lamp. Replace trim ring and lens.
2. Position the fixture housing into the concrete pour accessory, making sure that the underside of the housing flange rests on top of the set screws. Tighten set screws on side of accessory to lock the housing into place (do not over-tighten). Secure assembly to the final location with re-bar or other anchoring device.
3. Excavate soil where the fixture is to be installed.
4. Place assembly into excavated opening. Be sure there is a minimum of 3" of drainage material (sand or gravel only) covering the bottom of the hole.
5. Fill area with a minimum of 3" of drainage material. Be sure not to fill area flush with top of frame and assembly. This is to be filled with concrete.
6. Connect low voltage fixture wire to low voltage cable running to remote transformer, using silicone wire nuts or quick connector (supplied).
7. Pour concrete. Remember that fixture position cannot be altered after the concrete sets.
8. Turn power on at transformer.

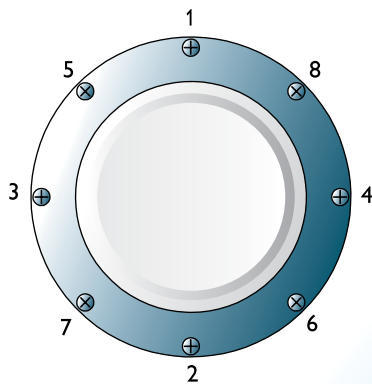

Order in which to tighten screws.

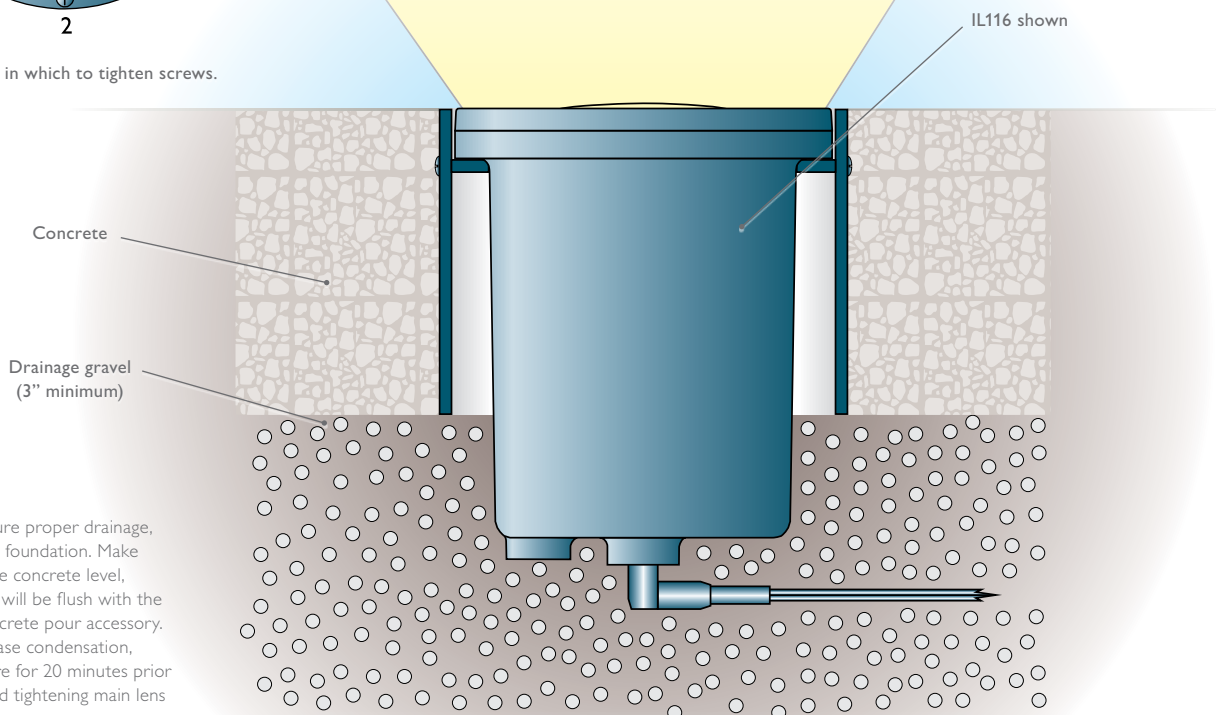

Note: To ensure proper drainage, prepare gravel foundation. Make certain that the concrete level, when poured, will be flush with the top of the concrete pour accessory. To help decrease condensation, energize fixture for 20 minutes prior to installing and tightening main lens and retainer ring.


Low Voltage Ground Installation

Installation process

1. Excavate soil for fixture placement and conduit runs, making sure the fixture will be elevated and the grade sloped down from the fixture. Be certain to allow a minimum of 3" of drainage material (sand or gravel only) under and around the housing.
2. Remove trim ring and lens and install specified lamp. Replace trim ring.
3. After drainage material is installed in the bottom, place fixture housing into hole, back-filling a minimum of 3" of drainage material (sand or gravel only) around the side of the housing. Be certain that the underside of housing flange rests on top of grade level.
4. Connect low voltage fixture wire to low voltage cable running to remote transformer, using silicone wire nuts or quick connector (supplied).
5. Turn power on at transformer.



Ground Installation

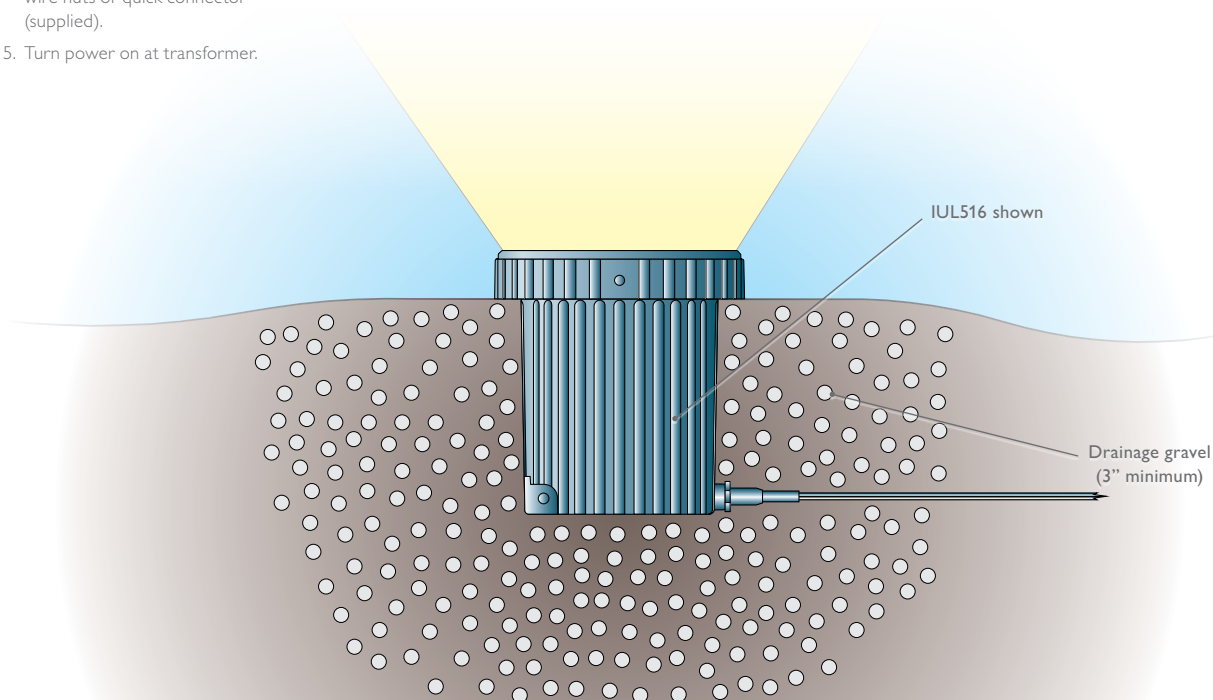


Note: Do not place fixture in a below grade location as the fixture will collect dirt and debris, and possibly become submerged in extremely wet conditions. Do not place plantings too close to the fixture as the foliage may grow over the luminaire, blocking the light. Do not allow mulch to touch inground fixture in any way as this may cause the fixture to overheat and fail.

Line Voltage Concrete Installation


Installation of inground fixtures requires special consideration. Proper grading, drainage material and potting of internal wires are procedures that are key to a successful inground installation. The following are basic steps in installing inground fixtures in either concrete (using the concrete pour accessory) or soil installation. For greater detailed instructions, refer to the installation sheet enclosed with each fixture.

Installation process

1. Remove trim ring and all internal components from fixture housing, except for the moisture absorbing desiccant pack attached to the side of the housing. Set aside.
2. Position the fixture housing into the concrete pour accessory, making sure that the underside of the housing flange rests on top of the set screws. Tighten set screws on side of accessory to lock the housing into place (do not over-tighten). Secure assembly to the final location with re-bar or other anchoring device.
3. Excavate soil where the fixture is to be installed. Dig a trench 18" deep for conduit installation.
4. Place assembly into hole. Be sure there is a minimum of 3" of drainage material (sand or gravel only) covering the bottom of the hole.
5. Install the conduit to housing using a watertight fitting (by others), and pull supply wires through into housing.
6. Press duct seal compound (by others) into wire entryway, and then fill the entire entryway with two-part potting compound (supplied with select fixtures) to seal the conduit entry point from moisture.
7. Place the dirt cover on the fixture to prevent gravel and concrete from falling into the fixture housing.
8. Fill area with a minimum of three 3" of drainage material. Be sure not to fill area flush with top of frame and assembly. This is to be filled with concrete.
9. Pour concrete. Remember that fixture position cannot be altered after the concrete sets.
10. Once the concrete has set and is completely cured, remove dirt cover from fixture and install electrical components. Use silicone wire nuts (by others) to connect supply wire to fixture wire, within housing.
11. Install specified lamp, and then replace gasketed lens, making certain there is no debris between the gasket and the housing. Install trim ring or rock guard per installation instructions.
12. Connect fixture to power source and energize.



Wires must be connected with silicone wire nuts and compartment must be potted.

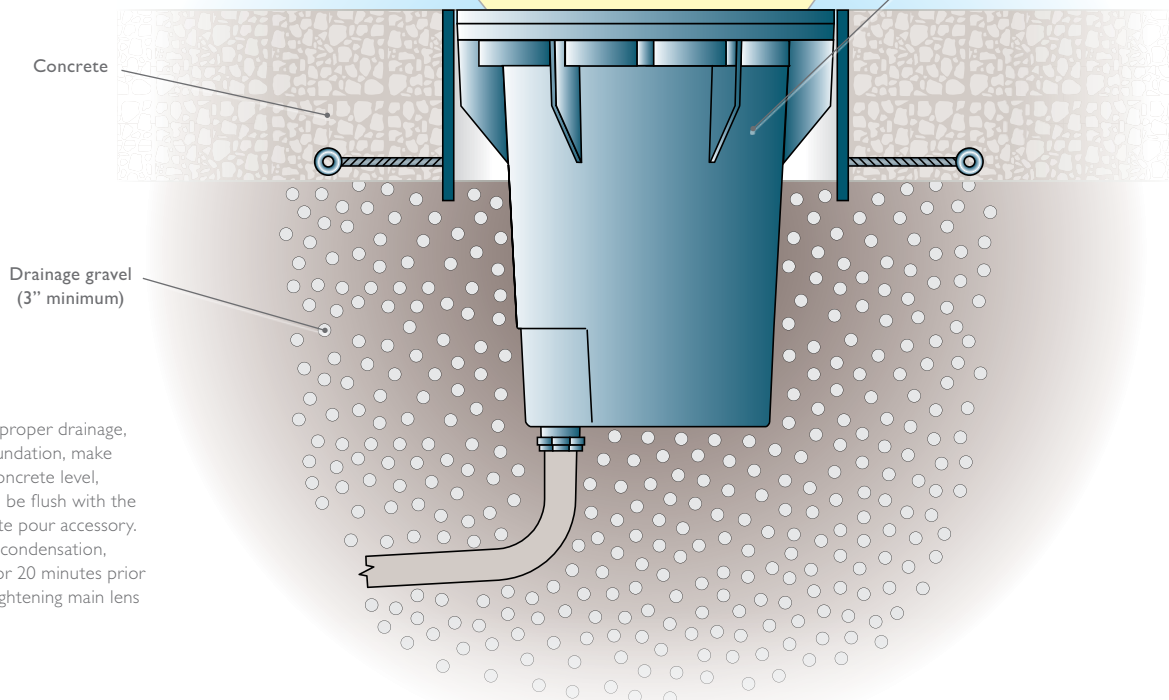


Note: To ensure proper drainage, prepare gravel foundation, make certain that the concrete level, when poured, will be flush with the top of the concrete pour accessory. To help decrease condensation, energize fixture for 20 minutes prior to installing and tightening main lens and retainer ring.


Line Voltage Ground Installation

Installation process

1. Excavate soil for fixture placement and conduit runs, making sure the fixture will be elevated and the grade sloped down from the fixture. Be certain to allow a minimum of 3" of drainage material (sand or gravel only) under and around the housing.
2. Remove trim ring and all internal components from fixture housing, except for the moisture absorbing desiccant pack attached to the side of the housing. Set aside.
3. After drainage material is installed in the bottom, place fixture housing into hole, back-filling a minimum of 3" of drainage material (sand or gravel only) around the side of the housing. Be certain that the underside of housing flange rests on top of grade level.
4. Install the conduit to housing using a watertight fitting (by others) and pull supply wires through, into housing.
5. Press duct seal compound (by others) into wire entryway, and then fill the entire entryway with two-part potting compound (supplied with select fixtures) to seal the conduit entry point from moisture.
6. Re-install ballast tray. Use silicone wire nuts (by others) to connect supply wire to fixture wire within housing.
7. Re-install balance of electrical components. Plug lamping module into quick connect, if applicable.
8. Install specified lamp, and then replace gasketed lens, making certain there is no debris between the gasket and the housing. Install trim ring or rock guard per installation instructions.
9. Connect fixture to power source and energize.

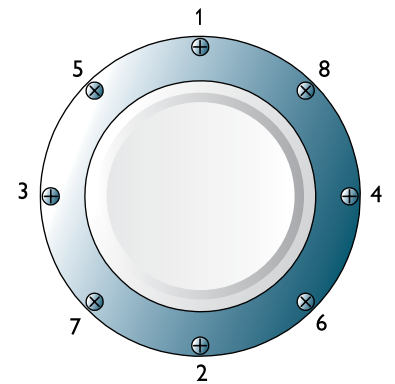

Order in which to tighten screws.

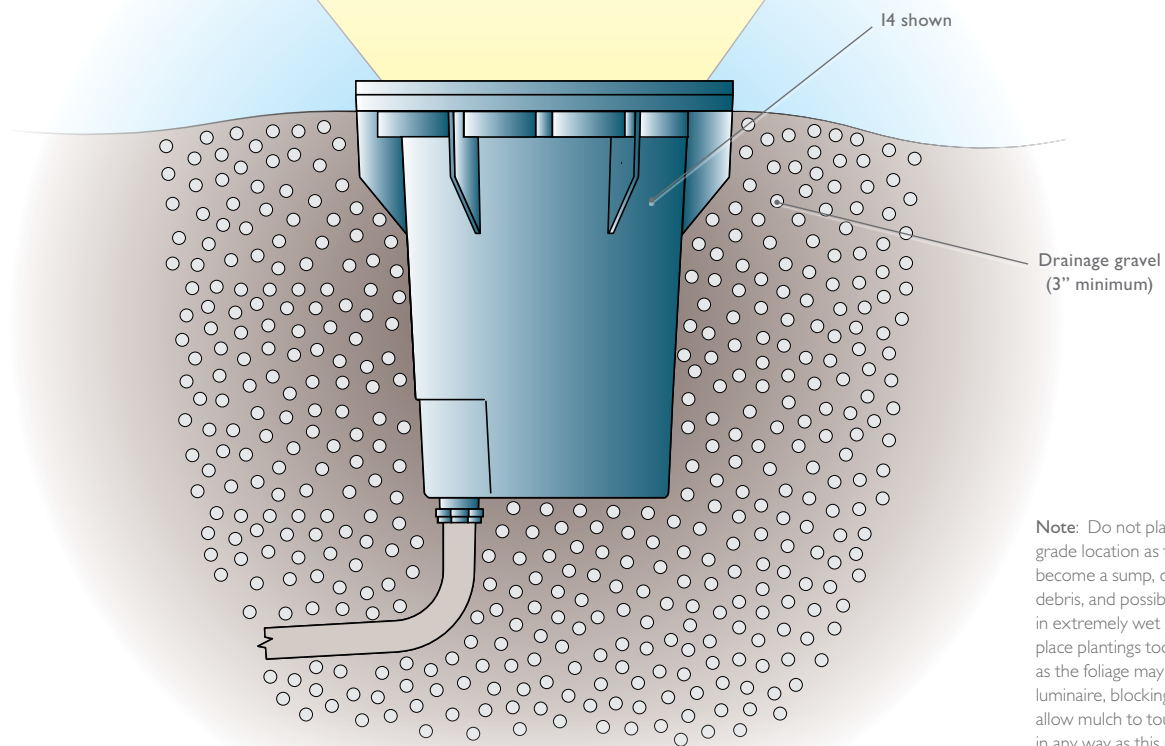


Note: Do not place fixture in a below grade location as the fixture will become a sump, collecting dirt and debris, and possibly become submerged in extremely wet conditions. Do not place plantings too close to the fixture as the foliage may grow over the luminaire, blocking the light. Do not allow mulch to touch inground fixture in any way as this may cause the fixture to overheat and fail.

Line Voltage Step light Installation

Round Aperture


New Stud Wall Installation process (use accessory kit #MAKNS)

- Using the supplied template, cut a level hole through the existing wall between studs. (Failure to level hole will cause fixture to have tilted appearance.)
- Mount L-brackets onto top and bottom of housing with screws positioned in center of slots.
- Insert cross brackets through L-brackets.
- Position fixture so the back of the finishing ring extends past the studs the thickness of the wallboard.
- Level fixture and hammer tabs on cross brackets into studs. Nail brackets securely to studs.
- Fine adjust fixture position and tighten any loose screws.
- Remove the 1/2" NPT plugs from the sides/bottom of the housing and pull the supply wire through into the housing.
- Remove finishing ring by removing flathead screws.
- Install wallboard.
- Replace finishing ring.
- Install thermal protector (attached to electrical chassis).

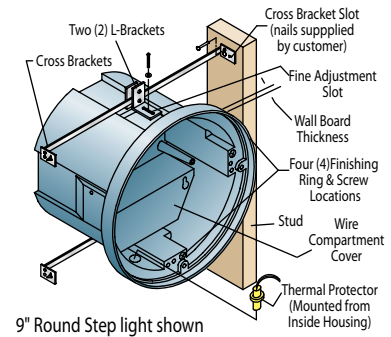


Existing Stud Wall Installation process (use accessory kit #MAKES)

- Using the supplied template, cut a level hole through the existing wall between studs. (Failure to level hole will cause fixture to have tilted appearance.)
- Push the mounting screws through the housing holes and into rear channels. (Note: a thin membrane covers the housing holes and may require forcing the screws through by tapping them lightly with a hammer.)
- Place flags flat on rear of housing. Thread screws into and through the flags.
- Remove the 1/2" NPT plugs from the sides/bottom of the housing and pull the supply wire through into the housing. (Through wiring not recommended.)
- Remove wiring compartment screw and wiring compartment from housing.
- Push housing into the hole in the wall.
- Tighten the mounting screws until the flag fasteners are drawn tight against the inner surface of the wall.
- Replace wiring compartment in its original position and replace screw.
- Install thermal protector (attached to electrical chassis).

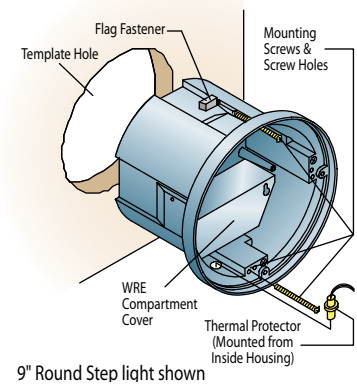


Masonry Installation process (use accessory kit #MAKM)

- Install screw through washer and lower masonry brackets and into tapped hole on bottom of the housing.
- Remove the 1/2" NPT plugs from the sides/bottom of the housing and pull the supply wire through into the housing.
- Be sure to use proper connections per NEC and local codes.
- Press housing and lower masonry brackets into the mortar so that mortar comes through the holes of the brackets.
- Continue laying block until level with the top of the fixture. Install the two upper masonry brackets into the housing as in Step 1.
- Finish laying mortar and block over top of the fixture.

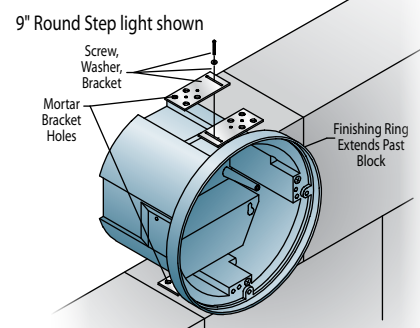

Concrete Pour Installation process (hardware included with each fixture)

- Level supplied template on wood support frame and drill 3/16" diameter clearance holes as marked.
- Remove the 1/2" NPT plugs from the sides/bottom of the housing.
- Install plastic protective shield (if supplied) into housing.
- Pull the supply wire through into the housing. (Through wiring not recommended.) Be sure all unused electrical plugs are replaced. Finishing ring may be removed now and replaced after concrete pour.
- Secure housing to wood support with screws supplied in hardware packet.
- Pour concrete.
- If finishing ring was removed, replace it and tighten flathead screws. If screws are not tight, fixture may leak.

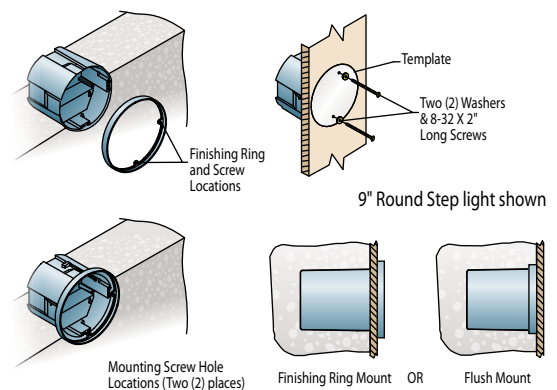


Line Voltage Step light Installation

Square Aperture


New or Existing Stud Wall Installation process (use accessory kit #MAKES)

- Using the supplied template, cut a level hole through the existing wall between studs. (Failure to level hole will cause fixture to have tilted appearance.)
- Push the four (4) mounting screws through the housing holes and into rear channels. (Note: a thin membrane covers the housing holes and may require forcing the screws through by tapping them lightly with a hammer.)
- Place flags flat on rear of housing. Thread screws into and through the flags.
- Remove the desired 1/2" NPT plugs from the side(s)/back/bottom of the housing and pull the supply wire through into the housing.
- Be sure to use proper connections per NEC and local codes.
- Push housing into the hole in the wall.
- Tighten the mounting screws until the flag fasteners are drawn tight against the inner surface of the wall.
- Install thermal protector.

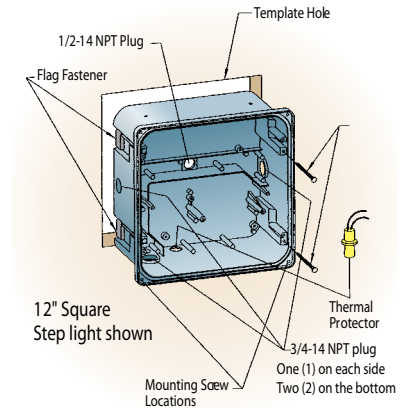


Masonry Installation process (use accessory kit #MAKM)

- Install two (2) screws through washers and lower masonry brackets and into tapped holes on bottom of the housing.
- Remove desired NPT plug(s) from the side(s)/back/bottom of the housing and pull the supply wire through into the housing.
- Be sure to use proper connections per NEC and local codes.
- Press housing with lower masonry brackets into the mortar so that mortar comes through the holes of the brackets.
- Continue laying block until level with the top of the fixture. Install the two upper masonry brackets into the housing as in Step 1.
- Finish laying mortar and block over top of the fixture.

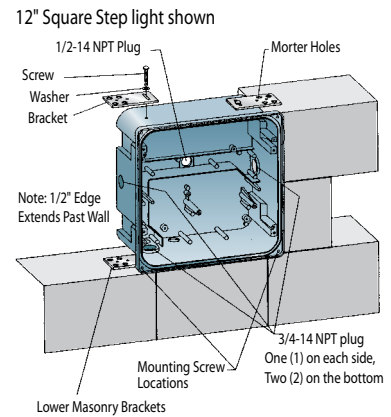

Concrete Pour Installation process (hardware included with each fixture)

- Install two (2) screws through washers and lower masonry brackets and into tapped holes on bottom of the housing.
- Remove desired NPT plug(s) from the side(s)/back/bottom of the housing and pull the supply wire through into the housing.
- Be sure to use proper connections per NEC and local codes.
- Press housing with lower masonry brackets into the mortar so that mortar comes through the holes of the brackets.
- Continue laying block until level with the top of the fixture. Install the two upper masonry brackets into the housing as in Step 1.
- Finish laying mortar and block over top of the fixture.

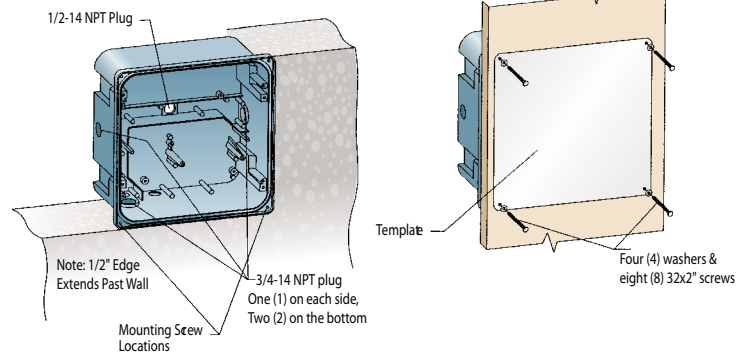


Low Voltage Pond Installation

Fixtures are intended for use in water gardens, fountains or ponds and not for use in swimming pool applications. Underwater lighting techniques may include up-lighting above-surface water features, or illuminating the water itself.


Installation process

1. Remove screw(s) and lens cover and install lamp.
2. Replace lens and cover and reinstall screw(s). Be certain that gasket area is wiped clean and is free of any debris and that screws are tightly fastened (do not overtighten).
3. Submerge fixture in water, making sure that the end of the 10-ft. SVO cord is not submerged. Fixture must be submerged a minimum of 2" below the water surface.
4. Connect dry end of SVO cord to cable run, using silicone-filled wire nuts (MA22 or similar).
5. Power supply (transformer) must be mounted in accordance to NEC specifications.
6. Do not allow the underwater fixture to freeze as this may cause fixture failure.

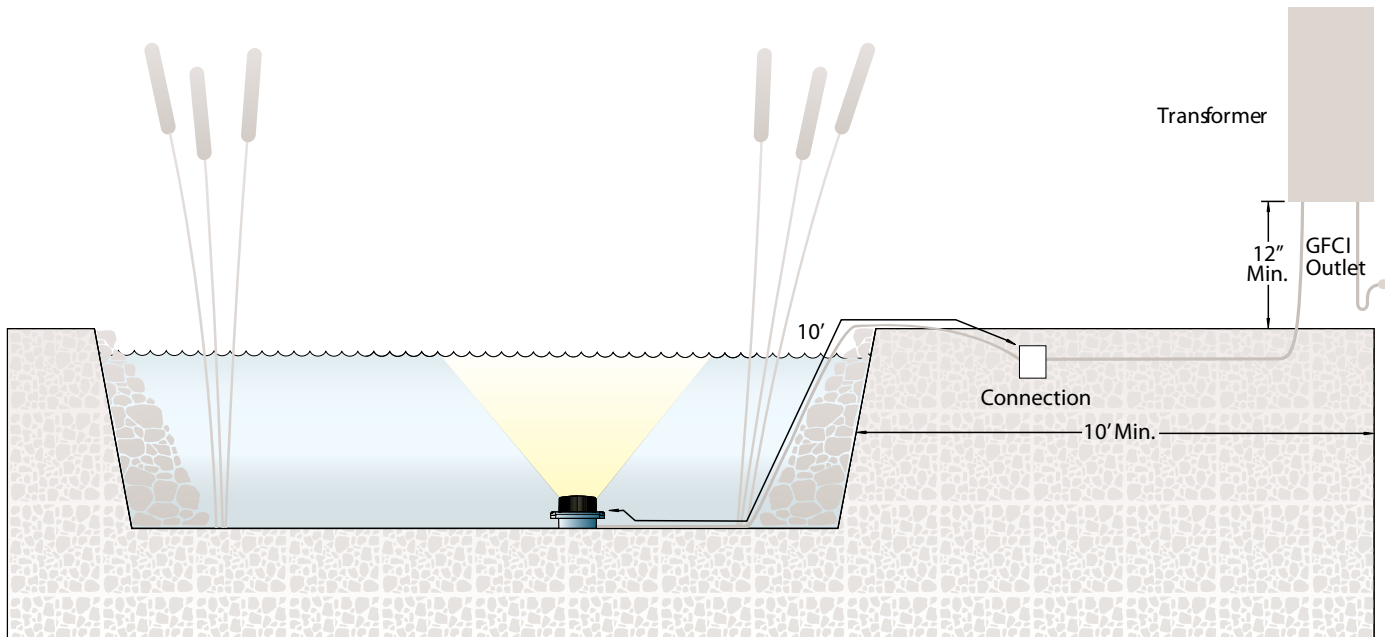

Line Voltage Waterfall and Fountain Installation


Aerated Waterfalls

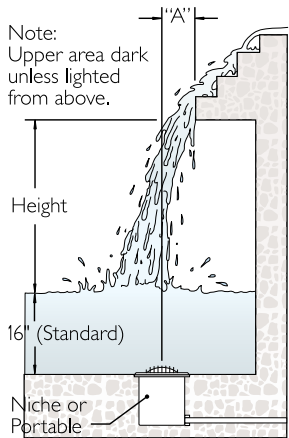

Waterfall height	A	B	C	Light spacing	Wattage required
1'	2"	NR	6"	2'	250W
2'	4"	NR	8"	2'	250W
3'	6"	16"	12"	3'	250W
4'	8"	18"	16"	3'	250W
5'	10"	20"	18"	4'	250W

NR = Not Recommended.


Sheet Waterfalls

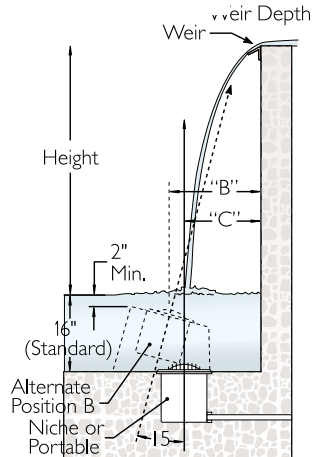

Waterfall height	A	B	C	Light spacing	Wattage required
1'	2"	NR	6"	2'	250W
2'	4"	NR	8"	2'	250W
3'	6"	16"	12"	3'	250W
4'	8"	18"	16"	3'	250W
5'	10"	20"	18"	4'	250W

NR = Not Recommended.

Fountains


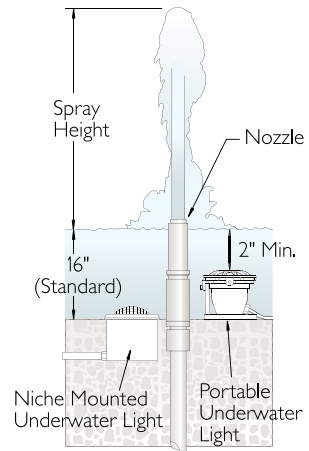


Spray height	Qty of lights	Wattage (portable)	Wattage (niche)
0-3'	1	250W	250W
3-10'	2	250W	NR
10-20'	3	250W	NR

NR = Not Recommended.


Junction Box and Fixture Installation

Base or Yoke Mount

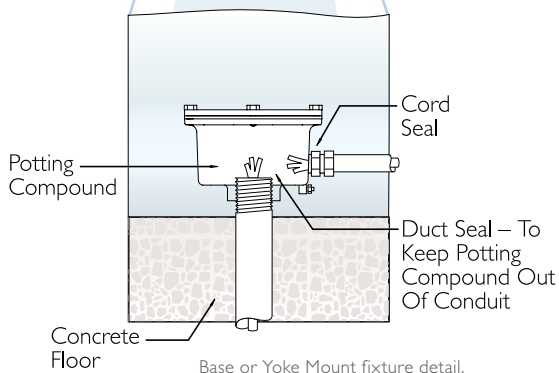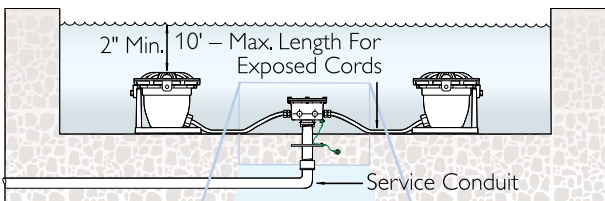

Base or Yoke Mount fixture detail.

Niche Mount/Fountains only

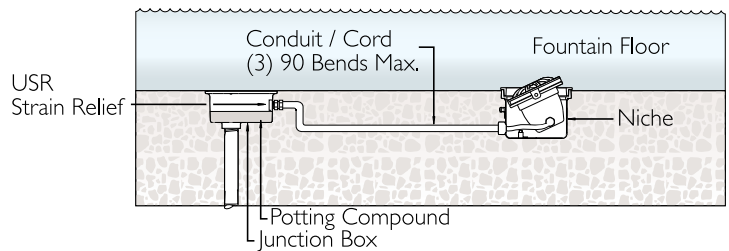

Conductor Size A.W.G.	Requires space in box for each conductor
18	1.5 CU.IN.
16	1.75 CU.IN.
14	2.0 CU.IN.
12	2.25 CU.IN.
10	2.5 CU.IN.
8	3.0 CU.IN.
6	5.0 CU.IN.

All conductors are to be considered in calculations.

LED index (chronologically listed)

LED Low Voltage

Accent lighting	16	In-ground lighting	24
BL5016	16	iL1116	24
BL616	16	iUL516	24
BL7D1	17	Deck lighting	25
BUL16	17	DAL1D	25
CUL16	18	DCL1D	25
MA5	19	DUL1D	25
MA7	19	Path and walkway lighting	26
Wall wash lighting	20	AL41D	26
AAL1D	20	AL4D	26
AUL1D	20	CL2D2	27
Flood lighting	21	CUL2D	27
WAML1D	21	CUL7D	28
WBML1D	21	CUL9D	28
Down lighting	22	CUL10D	29
DL1D	22	CUL14D	29
DRL1	22	ML4D	30
DRL2	23	RL4D	30
DRL1D	23	RL9D	31
		TRL4D	31

LED Line Voltage

Accent lighting	34	In-ground lighting	44
B1	34	i1.5	45
B4	34	i2.5	46
B_4	35	i3.5	47
BT1	35	iT216	48
BT5016	36	i3	49
BU3	36	Bollard lighting	50
MA3	37	RD6	50
B3	37	RF6	50
FL-50	38	DB14	51
FL-51	39	DB21	51
		DB30	51
Flood lighting	40	Residential lighting	52
WAM1D	40	Palermo	52
WBM1D	40	Riviera	53
Step and Aisle lighting	41	Manor	54
96 Line	41		
RSF2	42		
RSS2	42		
RSC2	42		
RSV2	42		

LED index (alphabetically listed)

96 Line	Line Voltage - Step and Aisle lighting	41
AAL1D	Low Voltage - Wall wash lighting	20
AL41D	Low Voltage - Path and walkway lighting	26
AL4D	Low Voltage - Path and walkway lighting	26
AUL1D	Low Voltage - Wall wash lighting	20
B_4	Line Voltage - Accent lighting	35
B1	Line Voltage - Accent lighting	34
B3	Line Voltage - Accent lighting	37
B4	Line Voltage - Accent lighting	34
BL5016	Low Voltage - Accent lighting	16
BL616	Low Voltage - Accent lighting	16
BL7D1	Low Voltage - Accent lighting	17
BT1	Line Voltage - Accent lighting	35
BT5016	Line Voltage - Accent lighting	36
BU3	Line Voltage - Accent lighting	36
BUL16	Low Voltage - Accent lighting	17
CL2D2	Low Voltage - Path and walkway lighting	27
CUL10D	Low Voltage - Path and walkway lighting	29
CUL14D	Low Voltage - Path and walkway lighting	29
CUL16	Low Voltage - Accent lighting	18
CUL2D	Low Voltage - Path and walkway lighting	27
CUL7D	Low Voltage - Path and walkway lighting	28
CUL9D	Low Voltage - Path and walkway lighting	28
DAL1D	Low Voltage - Deck lighting	25
DB14	Line Voltage - Bollard lighting	51
DB21	Line Voltage - Bollard lighting	51
DB30	Line Voltage - Bollard lighting	51
DCL1D	Low Voltage - Deck lighting	25
DL1D	Low Voltage - Down lighting	22
DRL1	Low Voltage - Down lighting	22
DRL1D	Low Voltage - Down lighting	23
DRL2	Low Voltage - Down lighting	23
DUL1D	Low Voltage - Deck lighting	25
FL-50	Line Voltage - Accent lighting	38
FL-51	Line Voltage - Accent lighting	39
i1.5	Line Voltage - In-ground lighting	45
i2.5	Line Voltage - In-ground lighting	46
i3	Line Voltage - In-ground lighting	49
i3.5	Line Voltage - In-ground lighting	47
iL1116	Low Voltage - In-ground lighting	24
iT216	Line Voltage - In-ground lighting	48
iUL516	Low Voltage - In-ground lighting	24
MA3	Line Voltage - Accent lighting	37
MA5	Low Voltage - Accent lighting	19
MA7	Low Voltage - Accent lighting	19
Manor	Line Voltage - Residential lighting	54
ML4D	Low Voltage - Path and walkway lighting	30
Palermo	Line Voltage - Residential lighting	52
RD6	Line Voltage - Bollard lighting	50
RF6	Line Voltage - Bollard lighting	50
Riviera	Line Voltage - Residential lighting	53
RL4D	Low Voltage - Path and walkway lighting	30
RL9D	Low Voltage - Path and walkway lighting	31
RSC2	Line Voltage - Step and Aisle lighting	42
RSF2	Line Voltage - Step and Aisle lighting	42
RSS2	Line Voltage - Step and Aisle lighting	42
RSV2	Line Voltage - Step and Aisle lighting	42
TRL4D	Low Voltage - Path and walkway lighting	31
WAM1D	Line Voltage - Flood lighting	40
WAML1D	Low Voltage - Flood lighting	21
WBM1D	Line Voltage - Flood lighting	40
WBML1D	Low Voltage - Flood lighting	21



© 2014 Koninklijke Philips N.V. All rights reserved.
Specifications are subject to change without notice.
www.philips.com/luminaires

PHc-1318BR 03/14

Philips Lighting
North America Corporation
200 Franklin Square Drive
Somerset, NJ 08873
Phone: 855-486-2216

Philips Lighting Company
281 Hillmount Road
Markham ON, Canada L6C 2S3
Phone: 800-668-9008