

PHILIPS

Application bundles



Corridor

Combine an LED luminaire with an intelligent control for maximum performance and savings



Your Corridor application bundle:
CoreLine Downlight LED20S & Presence detector LRM1011


Corridor lighting insights

Corridors are important spaces in their own right: in a building, they connect all the work areas, offices, meeting rooms, restaurants etc.

Corridor lighting needs to facilitate the movement of people. It must provide a clear view, without consuming more energy than needed. Philips LED lighting for corridors was developed to deliver clear, instant-on light, while significantly reducing energy costs up to 75% when combined with intelligent detectors.



More info:
www.philips.co.uk/coreline

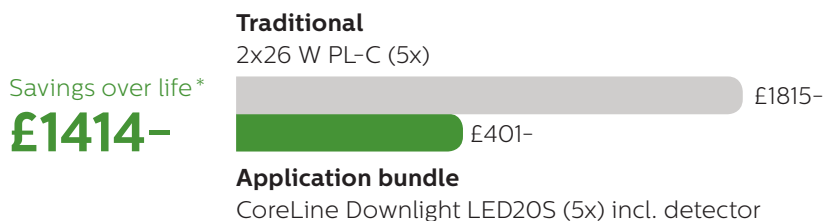

* Based on the UK average of 10p/kWh (including maintenance and lamp replacement cost) and the lighting design for this application bundle.

Bundle benefits

CoreLine Downlight LED20S




- Replacing compact fluorescent
- Energy saving
- 3-year warranty

Presence detector LRM1011



- Automatically switches off light when not required
- Small, unobtrusive sensor

Detection coverage diagram



Bundle specifications

CoreLine Downlight LED20S

Type	DN125B LED20S/830 PSR WH
	DN125B LED20S/840 PSR WH
Power	24 W
Luminous Flux	2000 lm
Colour temperature	3000 K, 4000 K
Colour Render Index	≥ 80
Lifetime	50,000 hours (L70B50)
Number of luminaires on MCB 16A type B	≤ 15
Ordering (EOC) code	29489699 3000 K 29490299 4000 K Also available in emergency
Cut-out diameter	200 mm
Dimmable	Yes

Presence detector LRM1011

Detecting range at 2 - 5 m height	Ø 6 - 11 m
Recommended mounting height	2 m - 5 m
Switch off delay	10 sec. - 30 min. in 6 steps
Number of luminaires on one control	≤ 15
Cut-out diameter	36 mm
Ordering (EOC) code	44209800

Lighting design insights

Brightness


Corridors are confined spaces. Use wide light beams to create a sufficiently bright environment and good vertical illuminance. By providing sufficient light on doors and walls, occupants are guided through the corridor.

Controls


When placing presence detectors consider entrances and exits to avoid going into a dark corridor.

Illuminance requirements

EN12464-1 requirement at floor ≥ 100 lux. Higher levels increase feeling of comfort & safety.

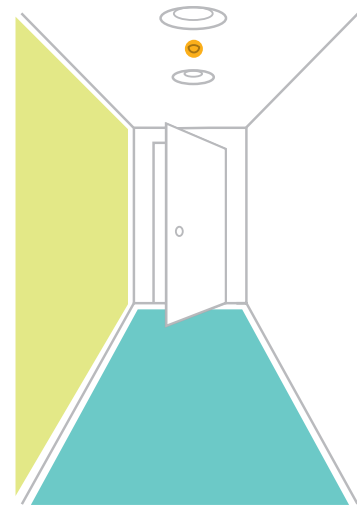

Lighting design corridor

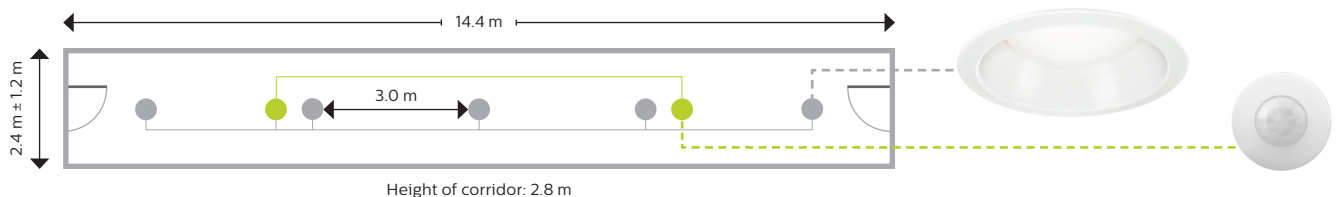

Luminaire types	# Lum.	Em [lux]	Sys. Power	Installed Power	W/m2	W/m2/100lux
Conventional PLC 2x26 W downlight	5	158	65.6 W	328 W	9.5	6.0
CoreLine Downlight LED20S	5	157	24 W	120 W	3.3	2.1