


Phase Loss Sense Panel

3-Phase, Feeder Power Sensing

The 95250 Phase Loss Sense Panel monitors 3-phase feed power and provides two independent contact-closure outputs (either Normally Open or Normally Closed) when any phase is lost. The contact-closure outputs may be connected to any Strand Lighting compatible lighting control panel or dimmer rack to signal an "Emergency" power loss condition.

The 95250 may be used with Strand Lighting A21 Dimming Panels, Lighting Control Panels, Contact Relay Panels, or C21 Dimming Cabinets.

The 95250 Phase Loss Sense Panel provides a UL924 compliant solution for emergency lighting systems.

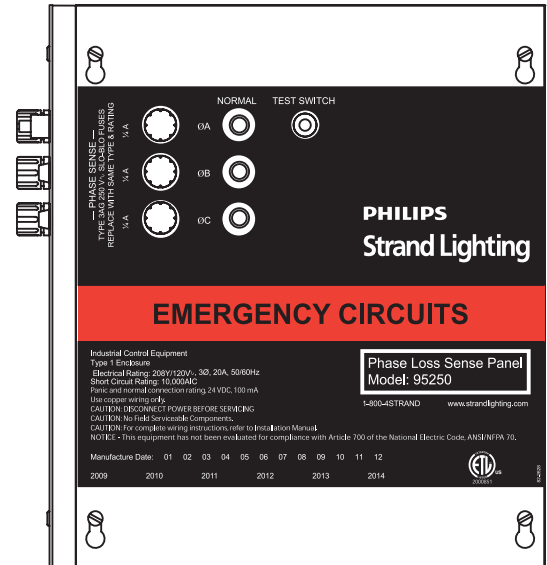


95250 Phase Loss Sense Panel

Features

- ETL Listed to UL924 for emergency circuit phase loss sensing
- Independent neon indicators for each phase present
- Test Switch activates contact-closure outputs
- Provides two independent contact-closure outputs; for either normally open or normally closed applications
- Front accessible individual fuses for all phases
- Complements A21 dimming, Contact relay, or C21 dimming systems
- Durable, steel construction that easily mounts near lighting control panels or cabinets
- Designed and manufactured in the USA


Application Example

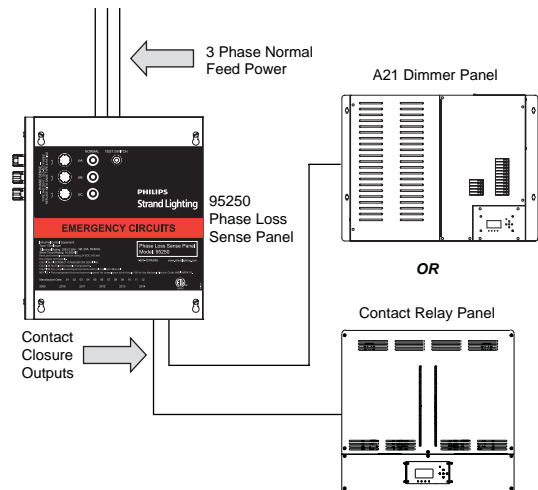

PHILIPS
Strand Lighting

SPECIFICATION SUBMITTAL

CONSULTANT: <input type="text"/>	PROJECT NAME: <input type="text"/>	MODEL NUMBER QUANTITY: <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>
DATE: <input type="text"/>	PROJECT NUMBER: <input type="text"/>	APPROVED BY: <input type="text"/>

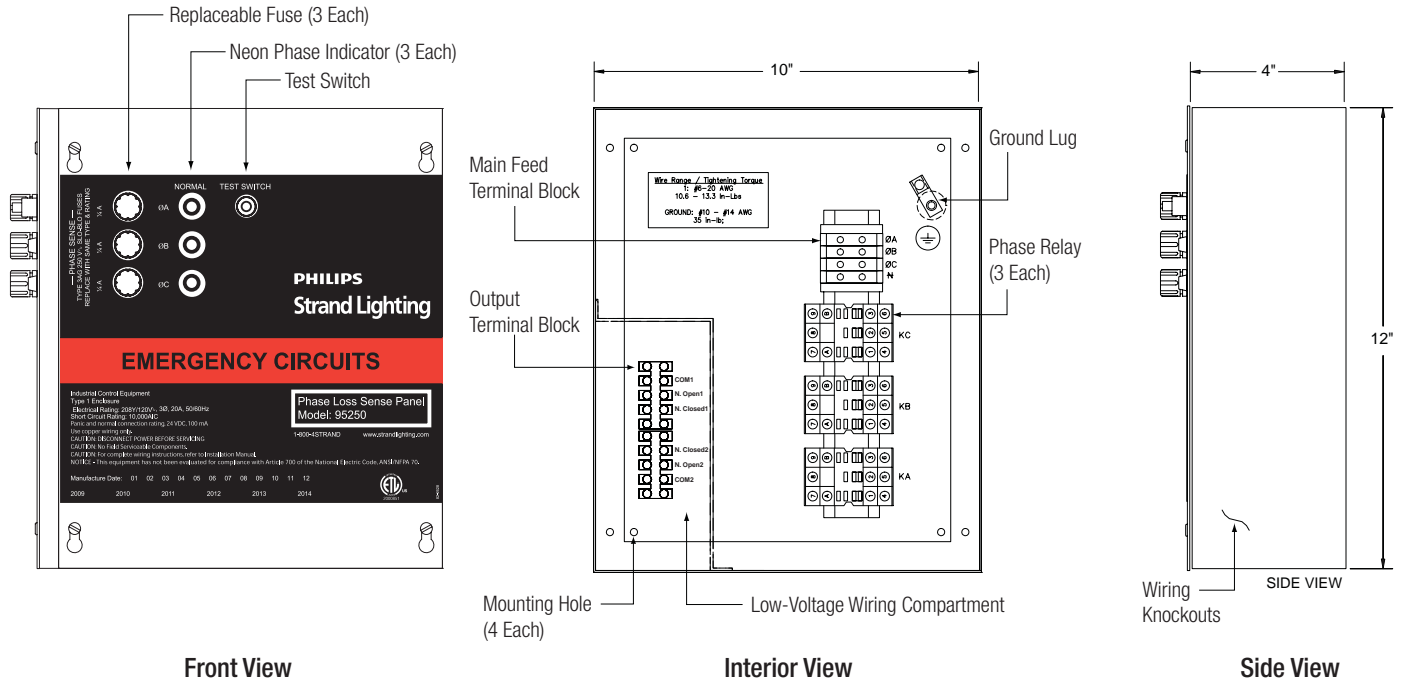

Specifications

Operational Specifications		Environmental Specifications	
Power Input:	3-Phase, 4-Wire (with ground) 208Y / 120VAC, 50/60 Hz, 20 Amp per Phase	Compliance:	ETL listed to UL924
Connection Rating:	24VDC, 100 mA (Panic and Normal Connections)	Operating Temperature:	32° to 104° F (0° to 40° C)
Short Circuit Rating:	10,000 AIC	Operating Humidity:	5 to 95% Non-condensing
Fuse Protection:	3 Each, 3AG, 250VAC 0.25 Amp Slo-Blo Replaceable Fuses	Enclosure:	NEMA Type 1 (Indoor Use Only)
Phase Sensing:	A, B, C	Mounting:	Surface mount, 4 holes (mounting hardware not provided)
		Size:	10 in. (W) x 12 in. (H) x 4 in. (D) 254 mm (W) x 305 mm (H) x 102 mm (D)
		Weight:	9.7 lbs (4.4 kg)

Ordering Information

Cat No. Description

Phase Loss Sense Panel - Surface Mount		
95250	3-Phase, Phase Loss Sense Panel	

Philips Strand Lighting

Dallas
10911 Petal Street
Dallas, TX 75238
Tel: +1 (214) 647-7880
Fax: +1 (214) 647-8031

Auckland
19-21 Kawana Street
Northcote, Auckland 0627
New Zealand
Tel: + 64 9 481 0100
Fax: + 64 9 481 0101

www.strandlighting.com
© Philips Group 2013
All rights reserved.
The Company reserves the right to make any variation in design, construction or descriptions contained herein, of the equipment, at any time without prior notice. E&OE

Asia
Unit C, 14/F,
Roxy Industrial Centre
No. 41-49 Kwai Cheong Road
Kwai Chung, N.T., Hong Kong
Tel: +852 2796 9786
Fax: +852 2798 6545

Europe
European Service & Distribution Centre
Rondweg zuid 85
Winterswijk 7102 JD
the Netherlands
Tel: +31 (0) 543-542516