

PHILIPS

LED Modules

Fortimo LED Strip

1ft 1100lm 1R LV3



Fortimo LED Strip systems are ideal for use in narrow width luminaire designs for architectural applications that were not possible with fluorescent lighting before. This Fortimo LED Strip product offers best-in-class module efficiency of up to 163 lm/W and flux packages.

The Fortimo LED Strip systems are ideal for use in luminaires for direct lighting in offices, banks, schools, public buildings, supermarkets and any other applications to replace high energy efficiency T5 fluorescent lighting.

Commercial Product Name	12NC
Fortimo LED Strip 1ft 1100lm 830 1R LV3	929000922706
Fortimo LED Strip 1ft 1100lm 835 1R LV3	929000922806
Fortimo LED Strip 1ft 1100lm 840 1R LV3	929000922906
Fortimo LED Strip 1ft 1100lm 850 1R LV3	929000923006
Fortimo LED Strip 1ft 1100lm 935 1R LV3	929000937906
Fortimo LED Strip 1ft 1100lm 940 1R LV3	929000923206

Fortimo LED Strip 1ft 1100lm 1R LV3

Features

- High LED module efficiency of up to 163 lm/W
- Narrow width (20mm)
- Light output range per module up to 1400 lm
- High CRI options (CRI90) and 3 SDCM color consistency
- Variation of color temperatures (3000K, 3500K, 4000K and 5000K)
- Push-in connectors enabling easy wiring
- Zhaga compliant

Benefits

- High energy efficiency and long lifetime allows state-of-the-art luminaire design
- Slim width enables optimized luminaire design and new form factors
- High color rendering and excellent color consistency brings linear LED lighting to the next level for quality of light
- 5-year limited system warranty with Philips Advance Xitanium LED Drivers¹


Applications

- Office
- Industry
- Retail

Optical Characteristics – Table per CCT

Fortimo LED Strip 1ft 1100lm 830 1R LV3				
Parameter	Min	Typ	Max	Unit
Luminous Flux		1060		Lm
Lumen Efficiency		155		Lm/W
Forward Current		200		mA
Forward Voltage	32.6	34.2	35.3	V
Correlated Color Temperature (CCT) Target		3000		K
CRI	80			-
Radiation Angle		120		deg

Color consistency of 3 SDCM, averaged over the module.
Tolerance for flux data is $\pm 7.5\%$.
Tolerance for efficacy data is $\pm 10\%$.

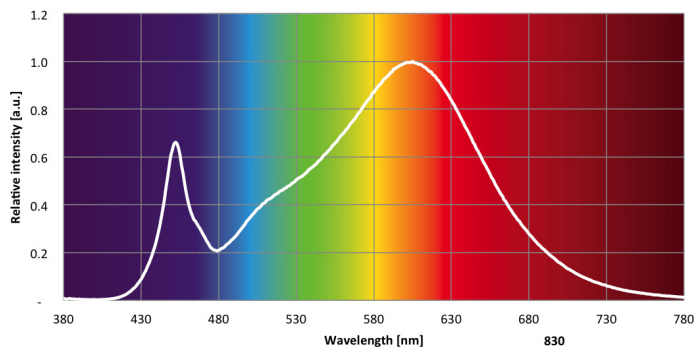

1. View limited warranty at http://www.usa.lighting.philips.com/connect/tools_literature/warranties.wpd for details and restrictions.

Fortimo LED Strip 1ft 1100lm 1R LV3

Optical Characteristics – Table per CCT


Fortimo LED Strip 1ft 1100lm 835 1R LV3

Parameter	Min	Typ	Max	Unit
Luminous Flux		1060		Lm
Lumen Efficiency		155		Lm/W
Forward Current		200		mA
Forward Voltage	32.6	34.2	35.3	V
Correlated Color Temperature (CCT) Target		3500		K
CRI	80			-
Radiation Angle		120		deg

Color consistency of 3 SDCM, averaged over the module.

Tolerance for flux data is $\pm 7.5\%$.

Tolerance for efficacy data is $\pm 10\%$.

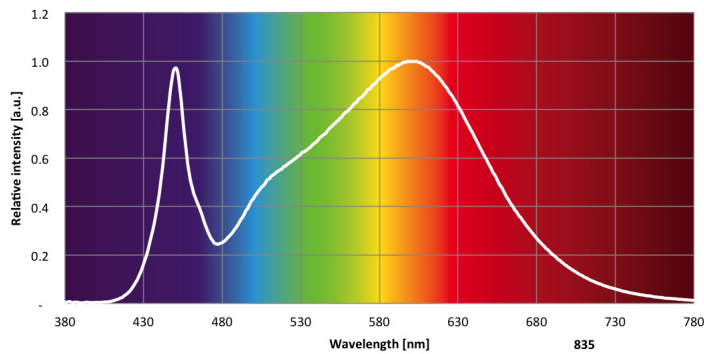

Fortimo LED Strip 1ft 1100lm 1R LV3


Optical Characteristics – Table per CCT

Fortimo LED Strip 1ft 1100lm 840 1R LV3				
Parameter	Min	Typ	Max	Unit
Luminous Flux		1100		Lm
Lumen Efficiency		160		Lm/W
Forward Current		200		mA
Forward Voltage	32.6	34.2	35.3	V
Correlated Color Temperature (CCT) Target		4000		K
CRI	80			-
Radiation Angle		120		deg

Color consistency of 3 SDCM, averaged over the module.

Tolerance for flux data is $\pm 7.5\%$.

Tolerance for efficacy data is $\pm 10\%$.

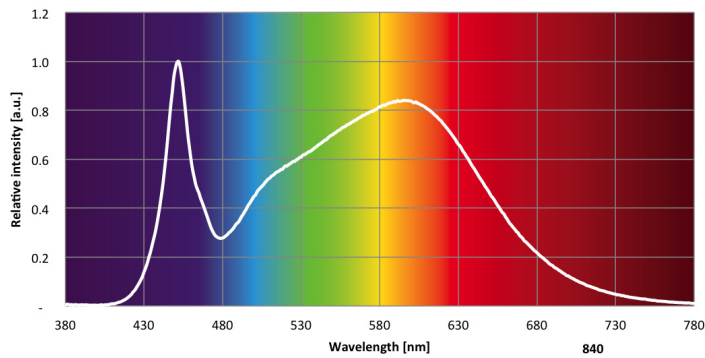

Fortimo LED Strip 1ft 1100lm 1R LV3


Optical Characteristics – Table per CCT

Fortimo LED Strip 1ft 1100lm 850 1R LV3				
Parameter	Min	Typ	Max	Unit
Luminous Flux		1120		Lm
Lumen Efficiency		163		Lm/W
Forward Current		200		mA
Forward Voltage	32.6	34.2	35.3	V
Correlated Color Temperature (CCT) Target		5000		K
CRI	80			-
Radiation Angle		120		deg

Color consistency of 3 SDCM, averaged over the module.

Tolerance for flux data is $\pm 7.5\%$.

Tolerance for efficacy data is $\pm 10\%$.

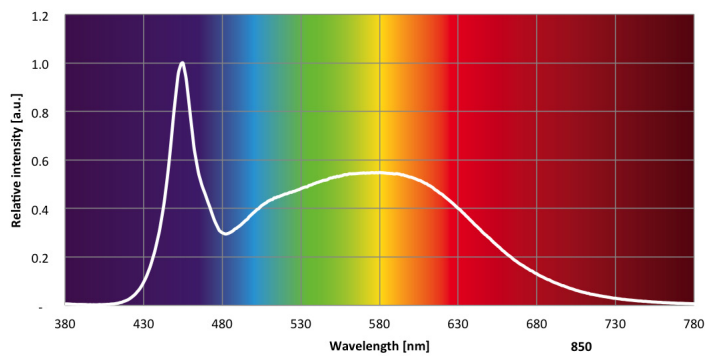

Fortimo LED Strip 1ft 1100lm 1R LV3

Optical Characteristics – Table per CCT


Fortimo LED Strip 1ft 1100lm 935 1R LV3

Parameter	Min	Typ	Max	Unit
Luminous Flux		890		Lm
Lumen Efficiency		130		Lm/W
Forward Current		200		mA
Forward Voltage	32.6	34.2	35.3	V
Correlated Color Temperature (CCT) Target		3500		K
CRI	90			-
Radiation Angle		120		deg

Color consistency of 3 SDCM, averaged over the module.

Tolerance for flux data is $\pm 7.5\%$.

Tolerance for efficacy data is $\pm 10\%$.

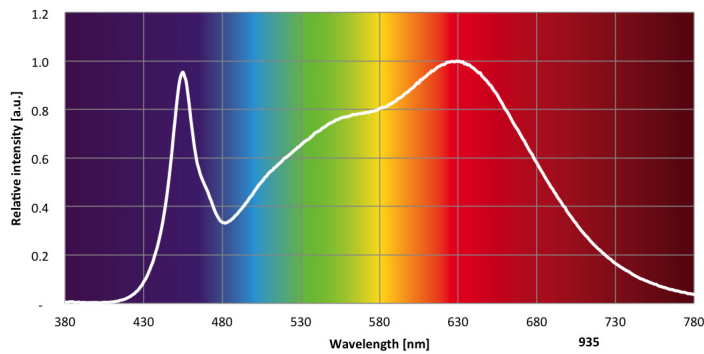


Fortimo LED Strip 1ft 1100lm 1R LV3

Optical Characteristics – Table per CCT

Fortimo LED Strip 1ft 1100lm 940 1R LV3				
Parameter	Min	Typ	Max	Unit
Luminous Flux		910		Lm
Lumen Efficiency		133		Lm/W
Forward Current		200		mA
Forward Voltage	32.6	34.2	35.3	V
Correlated Color Temperature (CCT) Target		4000		K
CRI	90			-
Radiation Angle		120		deg


Color consistency of 3 SDCM, averaged over the module.
Tolerance for flux data is $\pm 7.5\%$.
Tolerance for efficacy data is $\pm 10\%$.

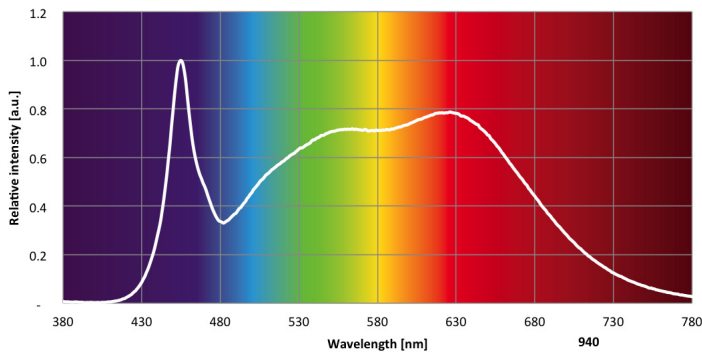

Fortimo LED Strip 1ft 1100lm 1R LV3

Beam Shape

The Philips Fortimo LED SLM generates a Lambertian beam shape, which is a pragmatic starting point for OEMs wishing to design secondary optics.

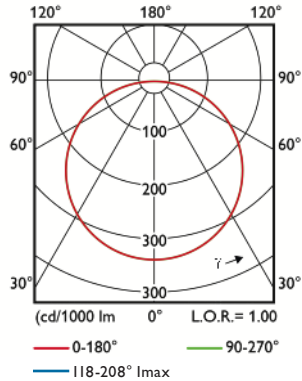

Electrical Characteristics

Parameter	Min	Typ	Max	Unit
Nominal Current		200		mA
Forward Voltage	32.6	34.2	35.3	V
Power Consumption	6.5	6.8	7.1	W

Note: Specifications stated at Tc nom = 45°C and I nom = 200 mA

Lifetime

Parameter	Nominal *	Life**	Max***
Tc [°C]	45	70	80
Current [mA]	200	265	300

* Nominal value at which performance is specified

** Value at which lifetime is specified (max current for warranty)

*** Maximum value for safety

Parameter	Min	Typ	Max	Units
Δu'v' at 6000 Hours			0.007	–

Note: Specifications stated while Tc < 65°C and I < 260 mA

Abs Max Ratings

Parameter	Min	Typ	Max	Unit
Current I_max			300	mA
Case Temperature Tc Max			80	°C
ESD (Direct Contact)			4	kV
ESD (Air)			8	kV
Isolation Breakdown Voltage	500			Vdc
Ambient Temperature	-40			°C
Number of Modules per Chain			5	

Fortimo LED Strip 1ft 1100lm 1R LV3

Wiring



Specification item	Value	Unit	Condition
Input Wire Cross-Section	0.2...0.8	mm ²	solid and fine stranded
	18...24	AWG	
Input Wire Strip Length	7.5...8.5	mm	

Note: Connector suited for robot wiring

Mechanical Characteristics

Parameter	Min	Typ	Max	Unit
Length	278.9	279.2	279.5	mm
Width	19.8	20	20.6	mm
Height Excl. Connector	1.45	1.60	1.75	mm
Height Incl. Connector	3.85	4.2	4.55	mm
Warpage (IPC-TM-650)			2.1	mm

Note: Bow & Twist of the PCB after production tested and released according IPC-TM-650 2.4.22

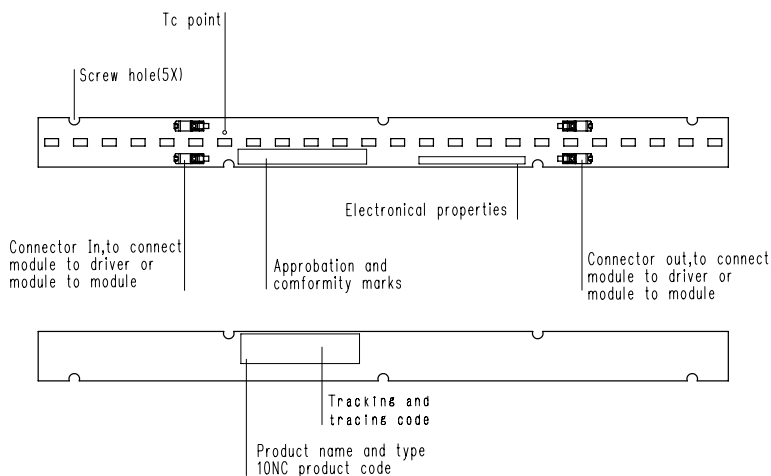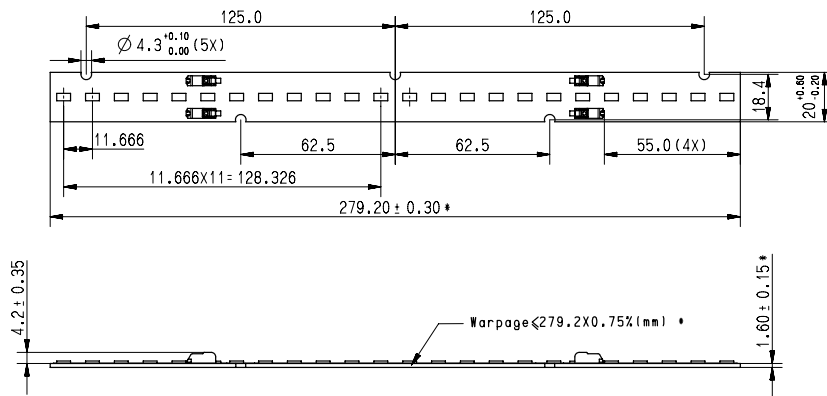

Un-indicated tolerance see ISO-2768-m
Not specified inner R Angle unity is 0.5mm

Fortimo LED Strip 1ft 1100lm 1R LV3

Application Information

Compliance and Approval

IEC / EN 62031, IEC / EN 62471, IEC / TR 62778, UL8750 (UL recognized)

Environmental

RoHS / REACH

Application Information

Zhaga*	
Designation of the ECG Housing (Book-1 / Annex C)	BL4
Designation of the Book-7 LLE Category	L28W2
Luminous Flux Category	C011
CCT Category	4000K
CRI	80
A Plain-Text-File with a Format as Defined in Book-7, Section 4.5	www.philips.com/technology/
A Greyscale Image with a Format as Defined in Book-7, Section 4.5	
The Position of the Temperature Measurement Point Tp	Same as Tc point
The Value of Tp, Max [°C]	65
The Value of Tp, Headroom [°C]	-

IP Rating	No IP rating
Overheating Protection	No protection
Luminaire Class	UL Class 2 / Class II or Class III


Warranted Number of Full Thermal Product Cycles @ 25°C Ambient Temperature

Case Temperature Tc [°C]	Amount of Cycles
35	
40	
45	>30,000
50	
55	>30,000
60	
65	30,000
70	27,000
75	20,000
80	15,000
85	
90	
95	

Fortimo LED Strip 1ft 1100lm 1R LV3


Tuning Information

Flux and Efficacy Vs. Current (at Nominal Temperature)

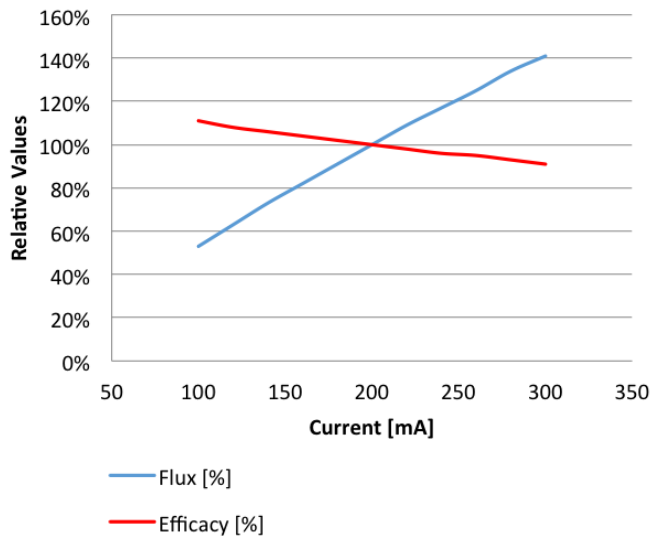

I [A]	Rel flux	Rel efficacy
100	53%	111%
120	63%	108%
140	73%	106%
160	82%	104%
180	91%	102%
200	100%	100%
220	109%	98%
240	117%	96%
260	125%	95%
280	134%	93%
300	141%	91%

Flux and Efficacy Vs. Tc

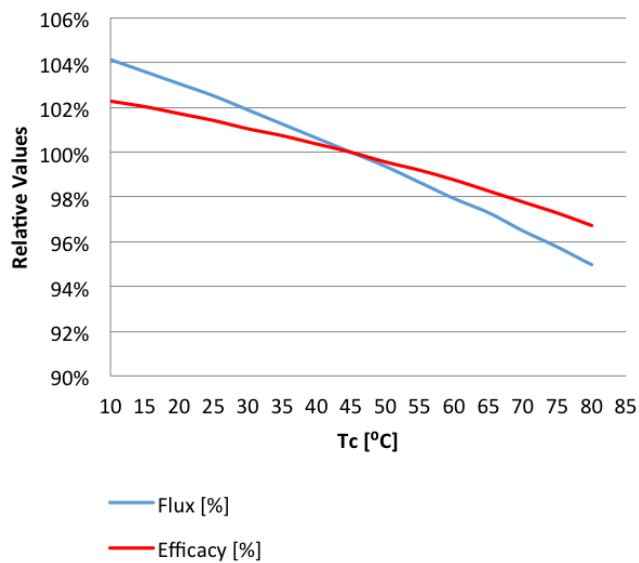


Tc [°C]	Rel flux	Rel efficacy
80	95%	97%
75	96%	97%
70	96%	98%
65	97%	98%
60	98%	99%
55	99%	99%
50	99%	100%
45	100%	100%
40	101%	100%
35	101%	101%
30	102%	101%
25	103%	101%
20	103%	102%
15	104%	102%
10	104%	102%
5	105%	103%
0	105%	103%

Fortimo LED Strip 1ft 1100lm 1R LV3

Lumen Maintenance

Lumen Maintenance: at I Life and Tc Life Conditions


Fortimo LED Strip 1ft 1100lm 1R LV3

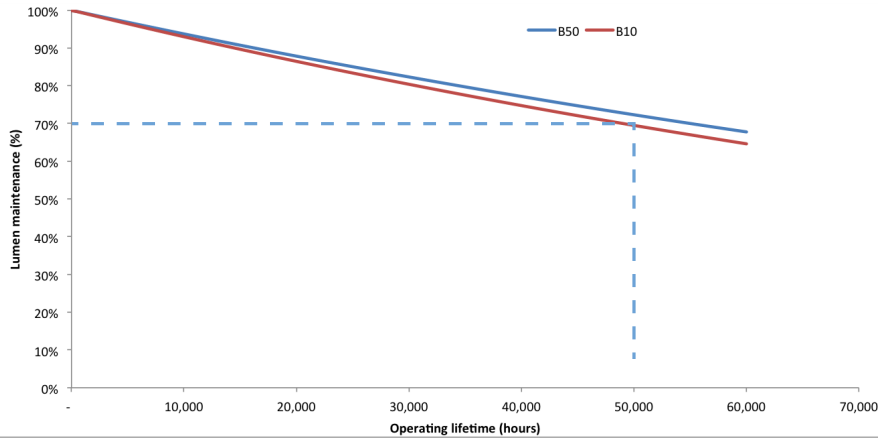

Lumen depreciation as a function of operating hours for I-life and Tc-life.
36,000 hours proven by certified laboratory.

Lumen Maintenance (B50): at Current I Life

Fortimo LED Strip 1ft 1100lm 1R LV3

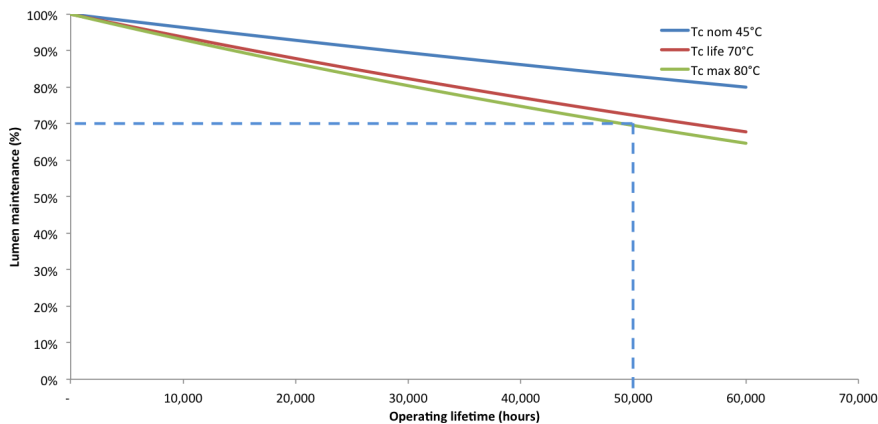

Lumen depreciation as a function of operating hours at different Tc values and I-life.
36,000 hours proven by certified laboratory.



© 2015 Koninklijke Philips N.V. All rights reserved.
Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.
philips.com/leddrivers



Philips Lighting North America Corporation
10275 W. Higgins Road, Rosemont IL 60018
Tel: 800-322-2086 Fax: 888-423-1882
Customer/Technical Service: 800-372-3331
OEM Support: 866-915-5886

Imported by: Philips Lighting
A division of Philips Electronics Ltd.
281 Hillmount Rd, Markham, ON, Canada L6C 2S3
Tel. 800-668-9008