





High Pressure Sodium Lamp Ballast

Catalog Number 71A81H8A
For 150W S55
60 Hz CWA
Status: Active

DIMENSIONS AND DATA

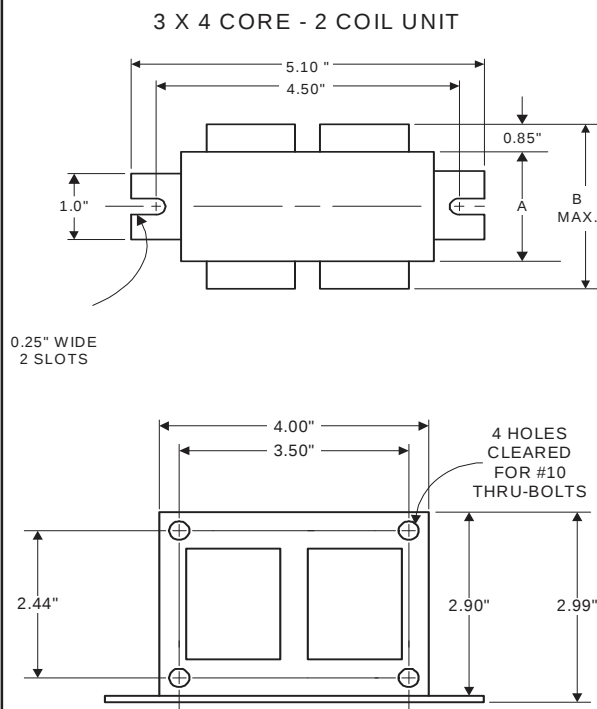


Capacitor: 7C550P24



Capacitance: 55
Dia/Oval Dim: 1.75
Height: 5.15
Temp Rating: 105°C

Ignitor: LI551-J4



Ballast to Lamp Distance
(BTL) = 10 feet
Temp Rating: 105°C

INPUT VOLTS	127	220			
CIRCUIT TYPE	CWA				
POWER FACTOR (min)	90%				
REGULATION	±10%				
Line Volts	WITHIN TRAPEZOID				
Lamp Watts					
LINE CURRENT (Amps)					
Operating.....	1.55	0.89			
Open Circuit.....	0.97	0.56			
Starting.....	1.11	0.68			
UL TEMPERATURE RATINGS					
Insulation Class	H(180°C)				
Coil Temperature Code	1029				
MIN. AMBIENT STARTING TEMP.	-40°F or -40°C				
NOM. OPEN CIRCUIT VOLTAGE	110				
INPUT VOLTAGE AT LAMP DROPOUT.....	90	160			
INPUT WATTS	198				
RECOMMENDED FUSE (Amps).....	5	3			
CORE and COIL					
Dimension (A)	3.04				
Dimension (B)	4.54				
Weight (lbs.)	8.4				
Lead Lengths	12"				
CAPACITOR REQUIREMENT					
Microfarads	55.0				
Volts (min.)	170				
Fault Current Withstand (amps)					
60 Hz TEST PROCEDURES (Refer to Advance Test Procedure for HID Ballasts - Form 1270)					
High Potential Test (Volts)					
1 minute	2000				
2 seconds	2500				
Open Circuit Voltage Test (Volts)	100-120				
Short-Circuit Current Test (Amps)					
Secondary Current	3.97-4.86				
Input Current.....	0.70-1.05	0.40-0.61	-	-	-

Wiring Diagram:

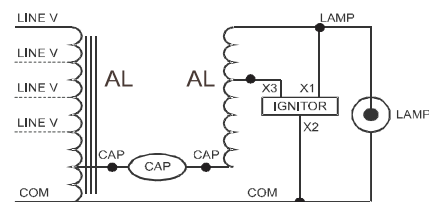


Fig. M8

Ordering Information

Order Suffix

Description

Data is based upon tests performed by Advance Transformer in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

ADVANCE TRANSFORMER CO.

O'HARE INTERNATIONAL CENTER · 10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Customer Support/Technical Service: Phone: 800-372-3331 · Fax: 847-768-7768
Corporate Offices: Phone: 800-322-2086

01/07/13