



HPL-N

HPL-N 400W E40 HG 1SL

Standard High Pressure Mercury lamp

Product data

• General Characteristics

Cap-Base	E40
Bulb	ED120 [ED 120mm]
Bulb Material	Hard Glass
Bulb Finish	Coated
Operating Position	any [Any or Universal (U)]
Life to 5% failures	6000 hr
Life to 20% failures	12000 hr
Life to 50% failures	16000 hr
LSF EM 2000h Rated, 12h cycle	99 %
LSF EM 4000h Rated, 12h cycle	97 %
LSF EM 6000h Rated, 12h cycle	92 %
LSF EM 8000h Rated, 12h cycle	83 %
LSF EM 12000h Rated, 12h cycle	65 %
LSF EM 16000h Rated, 12h cycle	45 %
LSF EM 20000h Rated, 12h cycle	28 %

• Light Technical Characteristics

Color Code	542 [CCT of 4200K]
Color Rendering Index	50 Ra8
Color Designation (text)	Cool White
Color Temperature	4200 K
Luminous Flux EM 25°C, Rated	22000 Lm
Lum Efficacy Rated EM 25°C	55 Lm/W

Lumen Maintenance 2000h	90 %
Lumen Maintenance 5000h	85 %
LLMF EM 2000h Rated	88 %
LLMF EM 4000h Rated	86 %
LLMF EM 6000h Rated	84 %
LLMF EM 8000h Rated	82 %
LLMF EM 12000h Rated	78 %
LLMF EM 16000h Rated	75 %
LLMF EM 20000h Rated	72 %
Chromaticity Coordinate X	384 -
Chromaticity Coordinate Y	384 -

• Electrical Characteristics

Lamp Wattage	400 W
Lamp Wattage EM 25°C, Nominal	400.0 W
Lamp Wattage EM 25°C, Rated	400.0 W
Lamp Voltage	140 V
Lamp Current EM	3.25 A
Dimmable	No

PHILIPS

• Environmental Characteristics

Energy Efficiency Label (EEL)	B
Mercury (Hg) Content	72 mg
Energy consumption kWh/1000h	440 kWh

• Luminaire Design Requirements

Cap-Base Temperature	210 (max) C
Bulb Temperature	350 (max) C

• Product Dimensions

Overall Length C	290 (max) mm
Diameter D	122 (max) mm

• Product Data


Order code	928053507495
Full product code	928053507495
Full product name	Error EOC
Order product name	HPL-N 400W E40 HG 1CT/6
Pieces per pack	1
Packing configuration	6
Packs per outerbox	6
Bar code on pack - EAN1	8711500214041
Bar code on outerbox - EAN3	8711500214058
Logistic code(s) - 12NC	928053507495
ILCOS code	QE-400/40/3-H-E40
Net weight per piece	0.257 kg

Warnings and Safety

- For use with control gear designed for high-pressure mercury lamps
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and


remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

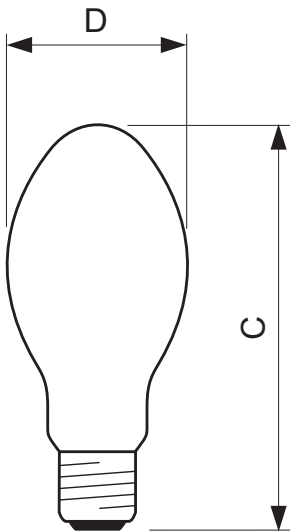


HPL-N 400W E40 HG 1SL

Product	C (Max)	D (Max)
HPL N 400W E40 HG	290	122



E40

Photometric data

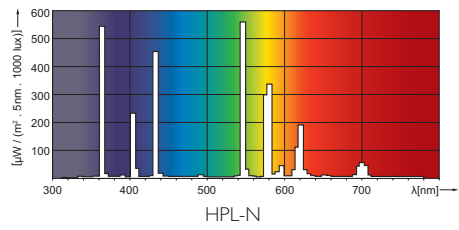

© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, August 29
data subject to change