



High Pressure
Sodium
Lamp Ballast

Catalog Number 71A84N3
For 400W S51
50 Hz CWA
Status: Active

DIMENSIONS AND DATA

4 1/4 X 4 3/4 CORE - 2 COIL UNIT




INPUT VOLTS	120	230			
CIRCUIT TYPE	CWA				
POWER FACTOR (min)	90%				
REGULATION					
Line Volts	±10%				
Lamp Watts	WITHIN TRAPAZOID				
LINE CURRENT (Amps)					
Operating.....	4.00	2.00			
Open Circuit.....	1.90	1.00			
Starting.....	3.70	1.85			
UL TEMPERATURE RATINGS					
Insulation Class	H(180°C)				
Coil Temperature Code	1029				
MIN. AMBIENT STARTING TEMP.	-40F or -40°C				
NOM. OPEN CIRCUIT VOLTAGE	190				
INPUT VOLTAGE AT LAMP DROPOUT.....	90	175			
INPUT WATTS	465				
RECOMMENDED FUSE (Amps).....	10	6			
CORE and COIL					
Dimension (A)	2.50				
Dimension (B)	4.125				
Weight (lbs.)	15				
Lead Lengths	12"				
CAPACITOR REQUIREMENT					
Microfarads	64.0				
Volts (min.)	240				
Fault Current Withstand (amps)					
60 Hz TEST PROCEDURES (Refer to Advance Test Procedure for HID Ballasts - Form 1270)					
High Potential Test (Volts)					
1 minute	2000				
2 seconds	2500				
Open Circuit Voltage Test (Volts)	175-215				
Short-Circuit Current Test (Amps)					
Secondary Current	9.80-12.10				
Input Current.....	5.40-8.10	2.70-4.20	-	-	-

Capacitor: 7C640S28R



Capacitance: 64
Dia/Oval Dim: 2.0
Height: 5.125
Temp Rating: 105°C

Wiring Diagram:

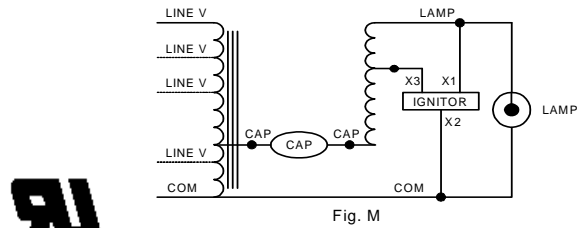

Ordering Information

Order Suffix	Description

Ignitor: LI501-H4



Red (X1)
White (X2)
Blue (X3)

Ballast to Lamp Distance (BTL) = 2 feet
Temp Rating: 105°C

Data is based upon tests performed by Advance Transformer in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

ADVANCE TRANSFORMER CO.

O'HARE INTERNATIONAL CENTER · 10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Customer Support/Technical Service: Phone: 800-372-3331 · Fax: 847-768-7768
Corporate Offices: Phone: 800-322-2086

09/18/01