




Metal Halide Lamp Ballast

Catalog Number 71A57N2
For 250W M138/M153 (P.S.)
50 Hz SUPER-CWA
Status: Active


DIMENSIONS AND DATA

4 1/4 X 4 3/4 CORE - 2 COIL UNIT

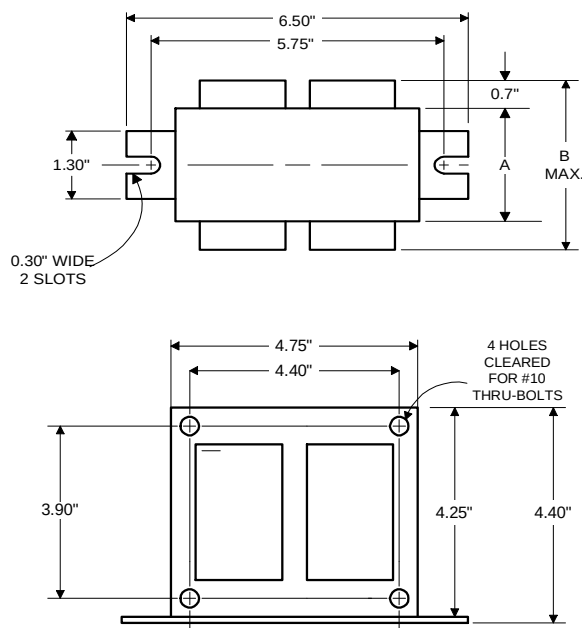


INPUT VOLTS	120	230			
CIRCUIT TYPE	SUPER-CWA				
POWER FACTOR (min)	90%				
REGULATION					
Line Volts	±10%				
Lamp Watts	±10%				
LINE CURRENT (Amps)					
Operating.....	2.60	1.35			
Open Circuit.....	1.65	0.85			
Starting.....	1.90	1.00			
UL TEMPERATURE RATINGS					
Insulation Class	H(180°C)				
Coil Temperature Code	1029				
MIN. AMBIENT STARTING TEMP.	-30°F or -35°C				
NOM. OPEN CIRCUIT VOLTAGE	280				
INPUT VOLTAGE AT LAMP DROPOUT.....	70	125			
INPUT WATTS	294				
RECOMMENDED FUSE (Amps).....	6	3			
CORE and COIL					
Dimension (A)	1.75				
Dimension (B)	3.25				
Weight (lbs.)	11.5				
Lead Lengths	12"				
CAPACITOR REQUIREMENT					
Microfarads	20.0				
Volts (min.)	330				
Fault Current Withstand (amps)					
60 Hz TEST PROCEDURES (Refer to Advance Test Procedure for HID Ballasts - Form 1270)					
High Potential Test (Volts)					
1 minute	1500				
2 seconds	2500				
Open Circuit Voltage Test (Volts)	270-330				
Short-Circuit Current Test (Amps)					
Secondary Current	3.70-4.50				
Input Current.....	3.30-44.9	1.70-2.60	-	-	-

Capacitor: 7C200P33-R



Capacitance: 20
Dia/Oval Dim: 1.75
Height: 3.75
Temp Rating: 105°C

Wiring Diagram:

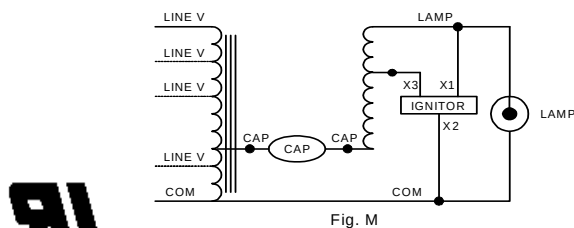

Ignitor: LI533-H4



Ballast to Lamp Distance
(BTL) = 5 feet
Temp Rating: 105°C

Ordering Information

Order Suffix	Description
500D	Dry Cap, No flag terminals

Data is based upon tests performed by Advance Transformer in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

ADVANCE TRANSFORMER CO.

O'HARE INTERNATIONAL CENTER · 10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Customer Support/Technical Service: Phone: 800-372-3331 · Fax: 847-768-7768
Corporate Offices: Phone: 800-322-2086

10/26/09