




Metal Halide Lamp Ballast

Catalog Number 71A60A1A
For 400W M59
60 Hz CWA
Status: Active

DIMENSIONS AND DATA

4 1/4 X 4 3/4 CORE - 2 COIL UNIT

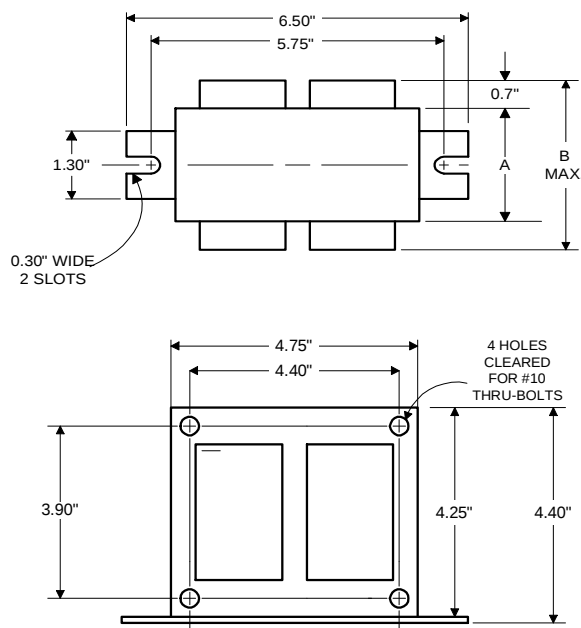

Capacitor: 7C240P40-R




Capacitance: 24
Dia/Oval Dim: 1.75
Height: 4.8
Temp Rating: 105°C

Ignitor: NA

This ballast does not
require the use of an ignitor.

INPUT VOLTS	120	277	347		
CIRCUIT TYPE	CWA				
POWER FACTOR (min)	90%				
REGULATION					
Line Volts	±10%				
Lamp Watts	±10%				
LINE CURRENT (Amps)					
Operating.....	4.00	1.75	1.40		
Open Circuit.....	2.60	1.20	0.90		
Starting.....	2.60	1.20	0.90		
UL TEMPERATURE RATINGS					
Insulation Class	H(180°C)				
Coil Temperature Code	1029				
MIN. AMBIENT STARTING TEMP.	-20°F or -30°C				
NOM. OPEN CIRCUIT VOLTAGE	300				
INPUT VOLTAGE AT LAMP DROPOUT.....	60	138	174		
INPUT WATTS	460				
RECOMMENDED FUSE (Amps).....	10	5	4		
CORE and COIL					
Dimension (A)	2.15				
Dimension (B)	4.00				
Weight (lbs.)	12				
Lead Lengths	12"				
CAPACITOR REQUIREMENT					
Microfarads	24.0				
Volts (min.)	400				
Fault Current Withstand (amps)					
60 Hz TEST PROCEDURES (Refer to Advance Test Procedure for HID Ballasts - Form 1270)					
High Potential Test (Volts)					
1 minute	2000				
2 seconds	2500				
Open Circuit Voltage Test (Volts)	270-330				
Short-Circuit Current Test (Amps)					
Secondary Current	3.50-4.30				
Input Current.....	2.75- 4.20	1.20- 1.80	0.95- 1.45	-	-

Wiring Diagram:

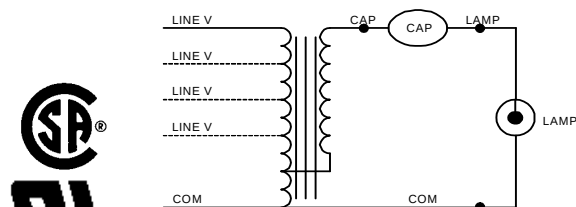

Ordering Information

Order Suffix

Description

Data is based upon tests performed by Advance Transformer in a controlled environment and representative of relative performance.
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

ADVANCE TRANSFORMER CO.

O'HARE INTERNATIONAL CENTER · 10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Customer Support/Technical Service: Phone: 800-372-3331 · Fax: 847-768-7768
Corporate Offices: Phone: 800-322-2086

06/22/07