


PHILIPS

Product Overview

XI075C053VI40CNYIM	
Brand Name	XITANIUM
Description	Xitanium 75W 0.53A INT-Y 0-10V sXt
Input Voltage	120 ~ 277V
Input Freq.	50/60Hz
RoHS	Yes
Status	Released

Input Voltage (Vac)	Output Power (W)	Output Voltage Range (V)	Output Current (A)	Efficiency@ Max Load and 70°C Case	Max Case Temp. (°C)	Input Current (Arms)	Max. Input Power (W)	Inrush Current (Apk/50%-µs)	THD @ Max Load (%)	Power Factor @ Max Load	Surge Protection Common/Diff (KV)	Weight (Lbs/kgs)	Envir. Protection Rating
120	75	71 - 143	0.53	90.5	80 °C	0.69	85	41 / 100	<10%	>0.95	4/4	1.53/ 0.7	UL damp and dry
277				92		0.29		90 / 100	<15%	>0.9			

Wire Diagram

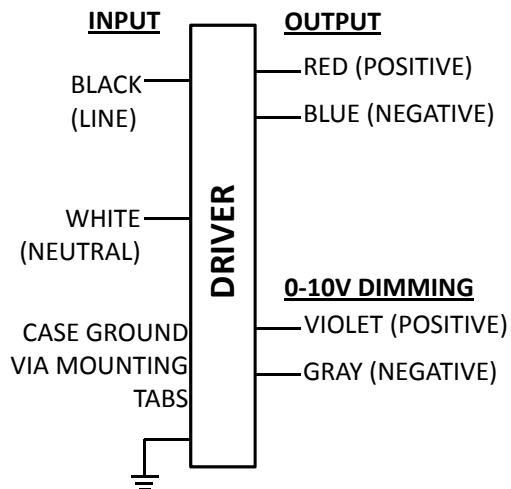

Product Data:

Input and output use lead-wires.
Lead-wires are 18AWG 105C/600V solid copper per UL1452.
Lead Length outside enclosure: 270 mm (±30mm) on all wires

Dimming	Dimming Range	Minimum Output Current (A)	Other Comments
0-10V Analog Class 1 or 2 Wiring Shutdown= Yes (see specification)	10% ~ 100%	0.053	Dimming source current: 150 µA (±3%)

Enclosure



	in. (mm)
Case Length	5.52 (138)
Case Width	2.35 (59.1)
Case Height	1.52 (38)
Mounting Length	6.12 (153)
Mounting Width	1.7 (42.9)
Overall Length	6.72 (168)



Revised 11/20/2012

PHILIPS LIGHTING ELECTRONICS N.A.
10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886



Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

XI075C053V140CNY1M	
Brand Name	XITANIUM
Description	Xitanium 75W 0.53A INT-Y 0-10V sXt
Input Voltage	120 ~ 277V
Input Freq.	50/60Hz
RoHS	Yes
Status	Released

Order code	XI075C053V140CNY1M
Full product code	XI075C053V140CNY1M
Full product name	XITANIUM 75W 0.53A INT-Y 0-10V SXT
Line Voltage	120-277Vac rms
Line Current	0.69A @ 120V, 0.29A @ 277V
Line Frequency	50/60Hz
Min. Mains voltage operational	108 V [min]
Max. Mains voltage operational	305V [max]
THD (total)	Refer to graph
Power Factor (PF)	Refer to graph
Inrush Current	Per NEMA 410
Input Over-voltage	Can survive input over-voltage stress of 320VAC for 48 hours and 350VAC for 2 hours
Lightning Surge Protection	Per IEEE C62.41.2 2002 (4KV, 1.2/50 μ s.8/20 μ s Combination Wave with 2 Ohms source impedance, L-N, L-PE, N-PE)
Output voltage range	71V to 143Vdc
Maximum open circuit voltage	146.5V (\pm 5%)
Output Current Ripple (ripple = peak to peak / average)	30% max @ max lout and max Vout Low frequency (\leq 120 Hz) content <5%
Protections	Short Circuit and Open Circuit Protection for LED + and LED-
Ambient Temp Range	-40C to +55C
Max Case Temperature (Tcase)	80C
Encapsulation	Yes, Fully potted
Interfaces	0-10V Dimming
AOC (Adjustable Output Current)	N/A
MTP (Module Temperature Protection)	N/A
0-10V Dimming Specifications	150 μ A \pm 3% source current from driver, Vdim > 14.5V to shutdown driver. See dim curve for detail.
Standby power	< 0.4W
Environmental Protection Rating	UL damp and dry
Life @ Tcase 70C	refer to graph below
Life @ Tcase 80C	refer to graph below
Agency Approbations	UL879, UL1012, UL935, (cRUs/CSA)
Electromagnetic Compliance	FCC Title 47 Part 15 Class A
Isolation	Refer to table

Revised 11/20/2012

PHILIPS LIGHTING ELECTRONICS N.A.
 10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
 Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
 Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886



Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

XI075C053VI40CNYIM	
Brand Name	XITANIUM
Description	Xitanium 75W 0.53A INT-Y 0-10V sXt
Input Voltage	120 ~ 277V
Input Freq.	50/60Hz
RoHS	Yes
Status	Released

0-10V Dimming Curve:

Dimming source current from the driver: 150µA (±3%) (@ 0<Vdim<8V)


LED Current Tolerance at 530mA ≤ 5% over temperature and component variations and ≤ 10% at any dim level.

Minimum Dim Level: 10% of Iout (minimum 35mA)

Guaranteed Shutdown driver with Vdim>14.5V

Typ. sink current: 3mA (4mA Max) at 16V dim

Guaranteed no shutdown driver with Vdim<12V

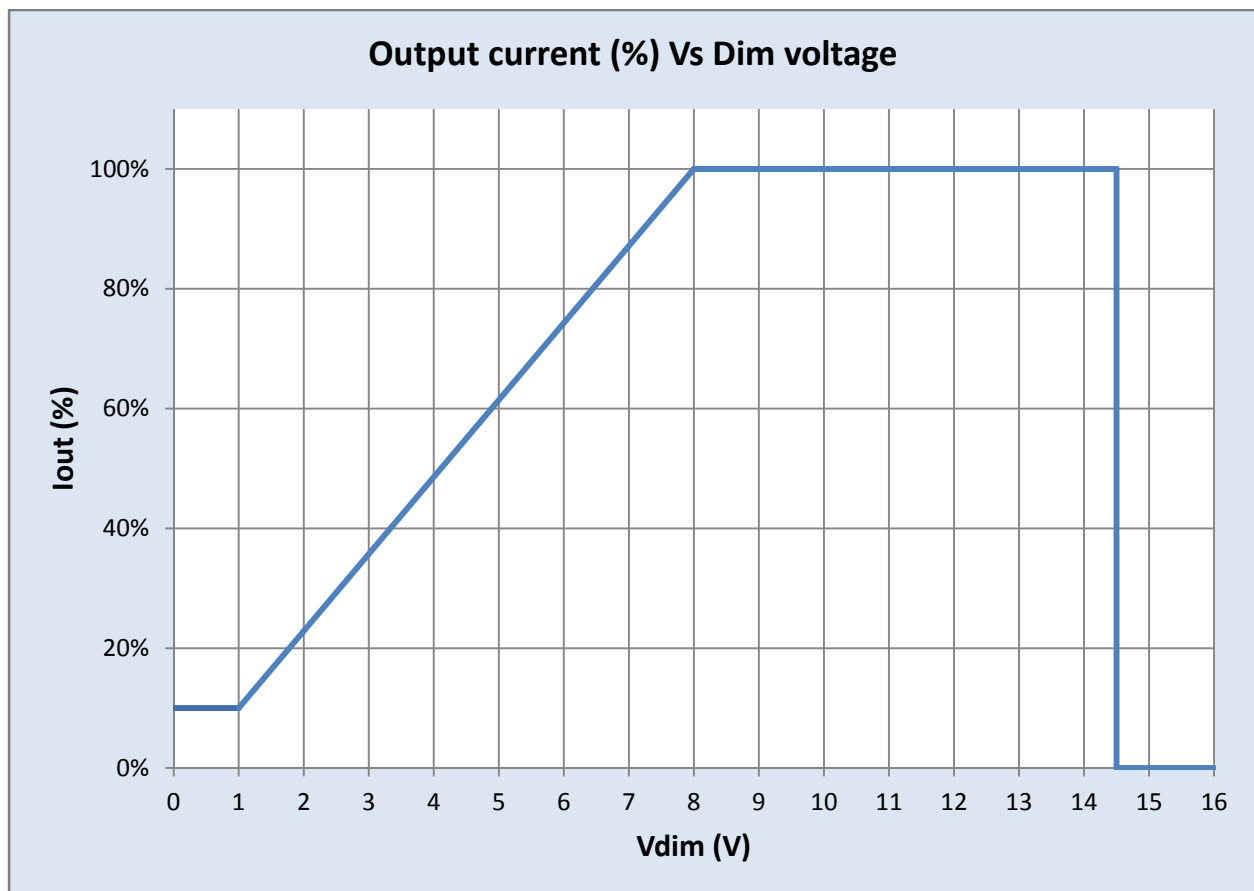

Revised 11/20/2012

PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018

Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance

Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886




Electrical Specifications


All the specifications are typical and at 25°C Tcase unless specified otherwise.

XI075C053VI40CNYIM	
Brand Name	XITANIUM
Description	Xitanium 75W 0.53A INT-Y 0-10V sXt
Input Voltage	120 ~ 277V
Input Freq.	50/60Hz
RoHS	Yes
Status	Released

Iout vs. Tcase of Driver:

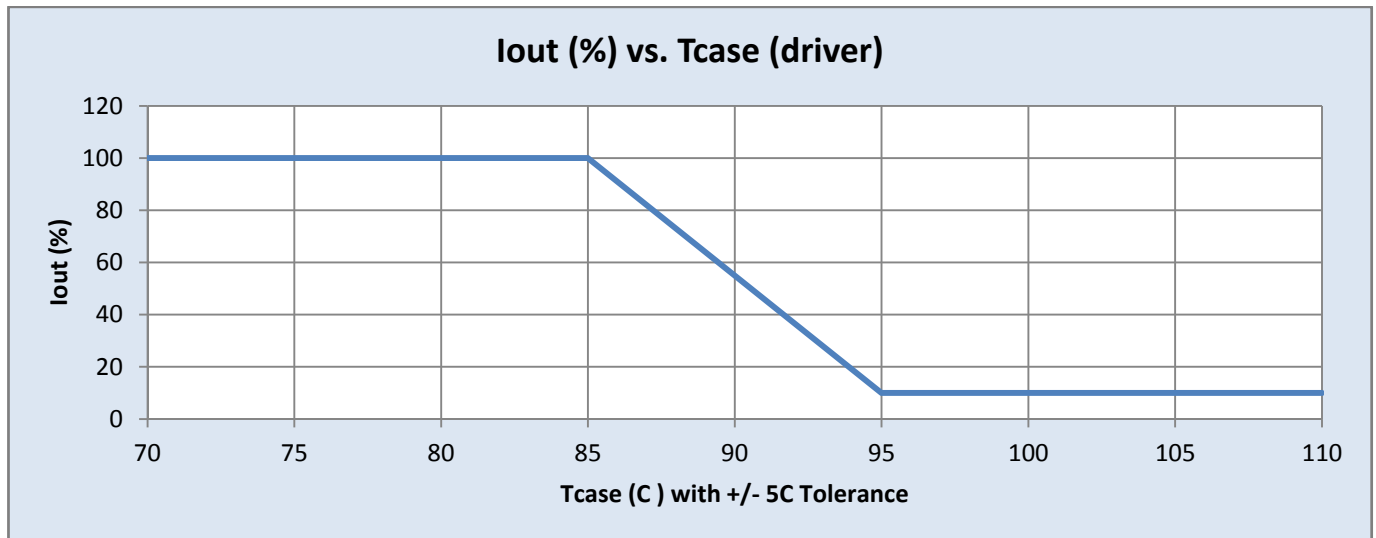

Lifetime vs. Tcase of Driver:

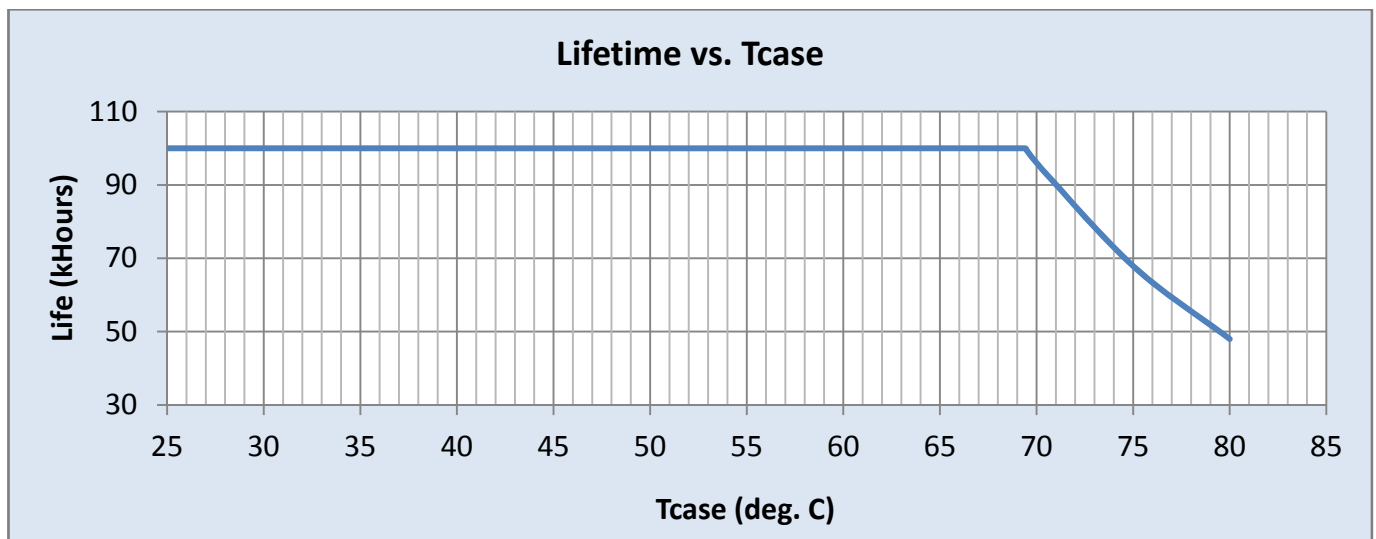

Revised 11/20/2012

PHILIPS

Electrical Specifications


All the specifications are typical and at 25°C Tcase unless specified otherwise.

XI075C053VI40CNYIM	
Brand Name	XITANIUM
Description	Xitanium 75W 0.53A INT-Y 0-10V sXt
Input Voltage	120 ~ 277V
Input Freq.	50/60Hz
RoHS	Yes
Status	Released

Failure Rate based upon field call rate data:

- <0.01% per 1 kHr @<= Tcase 70 C

Inrush Current Info:

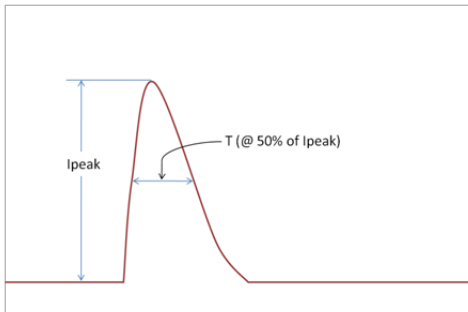

Vin	Ipeak	T (@ 50% of Ipeak)
120 Vrms	41 A	100 μs
277 Vrms	90 A	100 μs

Inrush current is measured at peak of the corresponding line voltage, source impedance per NEMA 410.

Revised 11/20/2012



PHILIPS LIGHTING ELECTRONICS N.A.
10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886



Performance Characteristics

Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments. The graphs are meant to be a guideline and not a specification.

XI075C053VI40CNYIM	
Brand Name	XITANIUM
Description	Xitanium 75W 0.53A INT-Y 0-10V sXt
Input Voltage	120 ~ 277V
Input Freq.	50/60Hz
RoHS	Yes
Status	Released

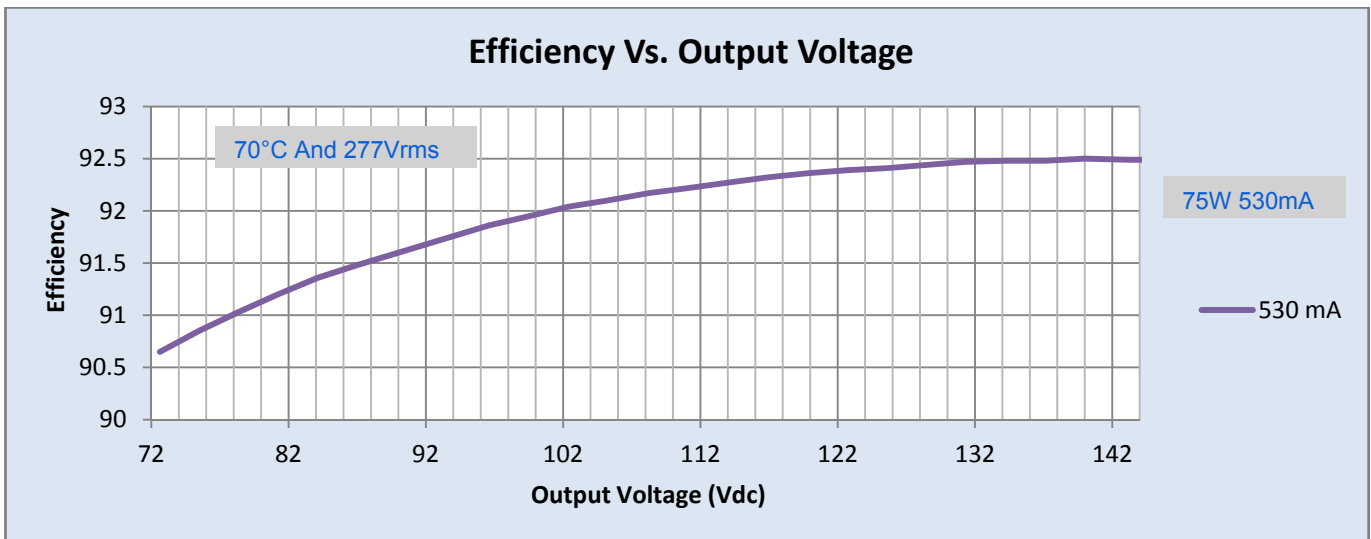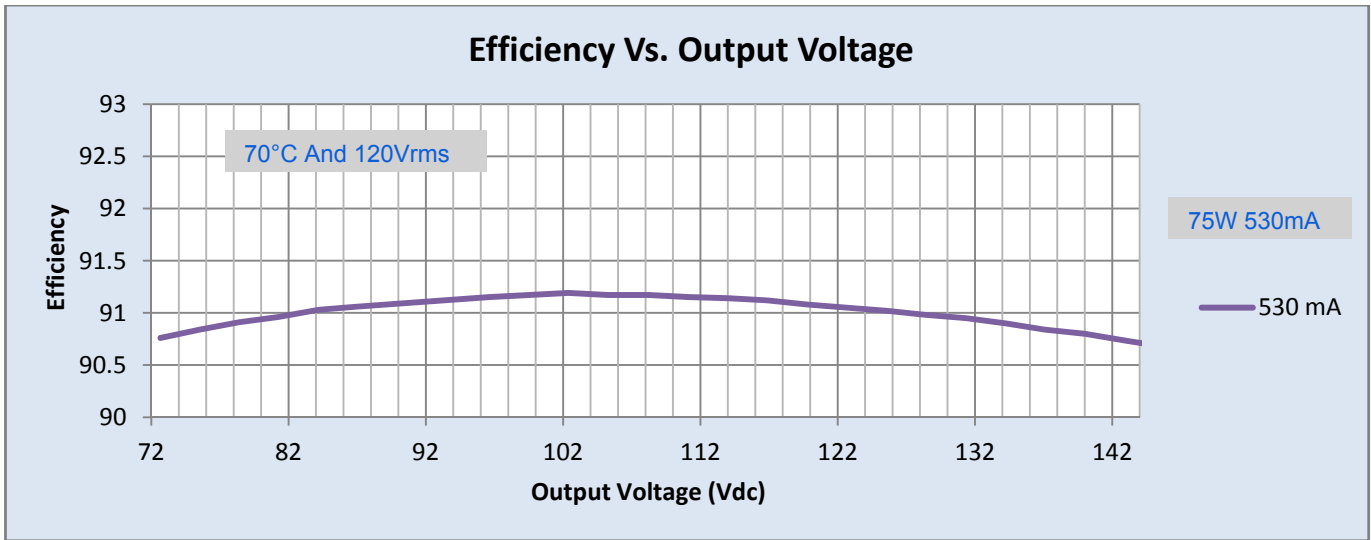



Revised 11/20/2012

PHILIPS

Performance Characteristics

Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments. The graphs are meant to be a guideline and not a specification.

XI075C053VI40CNYIM	
Brand Name	XITANIUM
Description	Xitanium 75W 0.53A INT-Y 0-10V sXt
Input Voltage	120 ~ 277V
Input Freq.	50/60Hz
RoHS	Yes
Status	Released

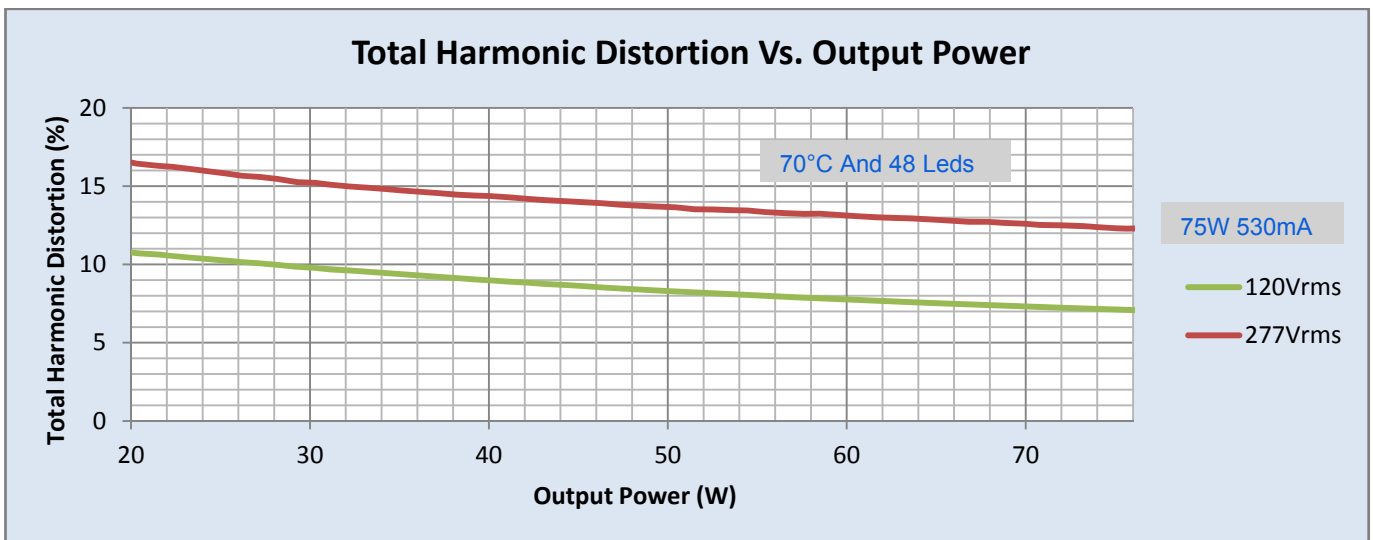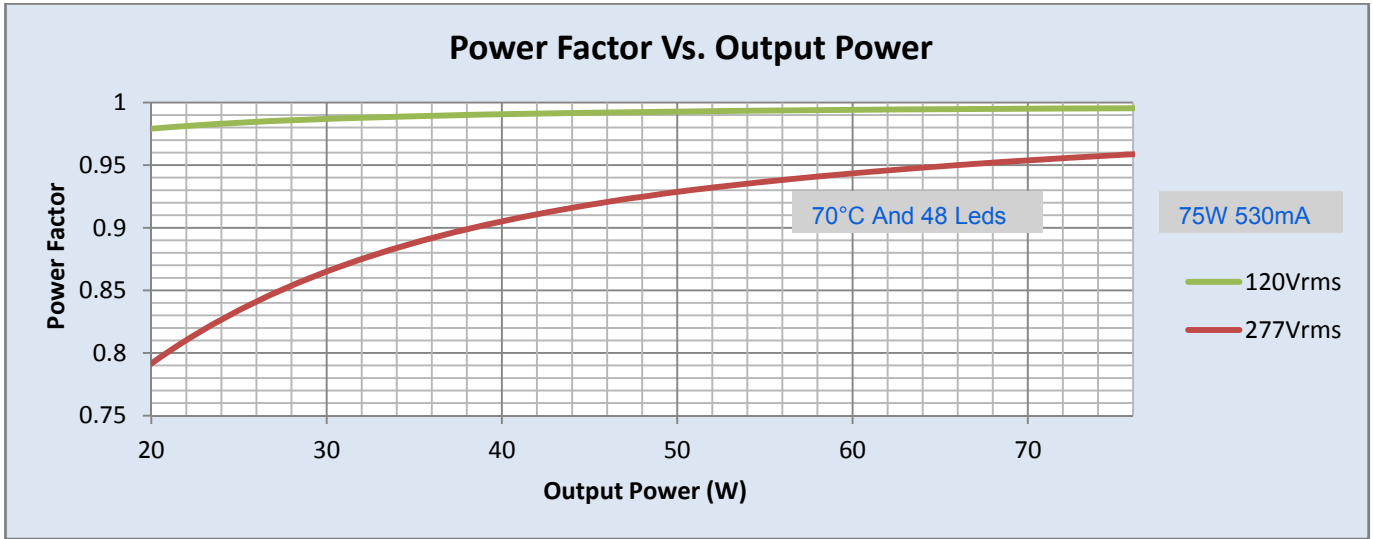

Revised 11/20/2012

PHILIPS LIGHTING ELECTRONICS N.A.
 10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
 Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
 Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886



Application Notes:

XI075C053VI40DNYIM	
Brand Name	XITANIUM
Description	Xitanium 75W 0.53A INT-Y 0-10V sXt
Input Voltage	120 ~ 277V
Input Freq.	50/60Hz
RoHS	Yes
Status	Released

Isolation:

Isolation	Input Wires	Output Wires	0-10V Wires (Class 1 & 2)	Enclosure
Input Wires	Not applicable	2xU+1KV	2.5KVac	2xU+1KV
Output Wires	2xU+1KV	Not applicable	2.5KVac	2xU+1KV
0-10V Wires (Class 1 & 2)	2.5KVac	2.5KVac	Not applicable	2.5KVac
Enclosure	2xU+1KV	2xU+1KV	2xU+1KV	Not applicable

UL Conditions of Acceptability:

Please contact your Philips representative for a copy of the latest UL Conditions Of Acceptability (COA).

Revised 11/20/2012

PHILIPS LIGHTING ELECTRONICS N.A.
10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886