

**PHILIPS
ADVANCE**



LED Driver

Xitanium

95W 1.0-2.75A 54V 0-10V INT
XI095C275V054DNF5




Philips Advance Xitanium Linear LED Drivers are designed to give OEMs ultimate flexibility. With wide operating windows and current adjustability, luminaire manufacturers can easily design luminaires with lumen levels appropriate for high-bay and office applications.

Specifications


| Input Voltage (Vac) | Output Power (W) | Output Voltage Range (V) | Output Current (A) | Efficiency@ Max Load and 70°C Case | Max Case Temp. (°C) | Input Current (Arms) | Max. Input Power (W) | THD @ Max Load (%) | Power Factor @ Max Load | Surge Protection (Ring Wave, KV) | Envir. Protection Rating |
|---------------------|------------------|--------------------------|--------------------|------------------------------------|---------------------|----------------------|----------------------|--------------------|-------------------------|----------------------------------|--------------------------|
| 120 | 95 | 27 - 54 | 1.0 – 2.75 | 90 | 90°C | 0.9 | 107 | <10% | >0.95 | >6 | UL damp and dry |
| 277 | | | | 92 | | 0.4 | | <15% | | | |

Enclosure

| | In. (mm) |
|-----------------|--------------|
| Case Length | 8.44 (214.0) |
| Case Width | 2.35 (59.3) |
| Case Height | 1.48 (37.3) |
| Mounting Length | 2.0 (50.8) |
| Overall Length | 9.47 (240.5) |

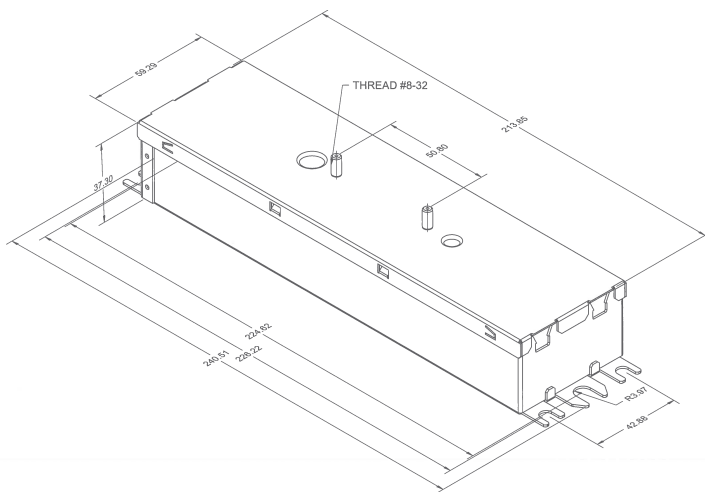

Wiring Diagram

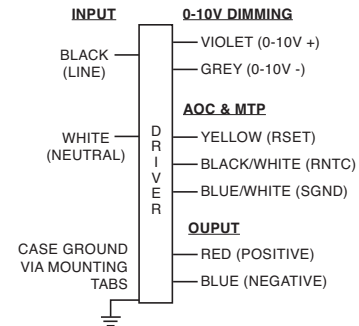

Input and output use lead-wires.

Lead-wires are 18AWG 105C/600V solid copper per UL1452.

Lead Length outside enclosure: 260mm (±30mm) on all wires.

| Dimming | Dimming Range | Minimum Output Current (A) |
|-----------------------------------|---------------|----------------------------|
| 0-10V Analog Class 2 Wiring | 5% ~ 100% | 0.05 |

Xitanium 95W 1.0-2.75A 54V 0-10V INT

Features

- UL Class 2 output with Adjustable Output Current
- Housing with high thermal capabilities
- Bottom stud mounting

Benefits

- Flexibility and ease of design via adjustable drive current and low voltage output
- Allows luminaire designs for high ambient temperatures
- Allows for easy junction box mounting

Application

- Indoor downlight applications
- Office
- Retail

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

Product Data

| Order Information | |
|---|---|
| Full Product Code | XI095C275V054DNF5M (Mid-Pack, 10pcs/Box) |
| Line Frequency | 50/60Hz |
| Min. Mains Voltage Operational | 108V |
| Max. Mains Voltage Operational | 305V |
| Output Information | |
| Maximum Open Circuit Voltage | <60Vdc |
| Output Current Ripple (ripple = peak to average / average) | 15% max @ max lout Low frequency (≤ 120 Hz) content <5% |
| Output Current Tolerance (In the performance window) | <5% |
| Protections | Short Circuit, Open Circuit Protection for LED + and LED – and Temperature Foldback |
| Features | |
| 0-10V Dimming | 150 μ A source current from driver. See dim curve for detail. |
| AOC (Adjustable Output Current) | 1000mA to 2750mA via external resistor (refer to graph and notes) |
| MTP (Module Temperature Protection) | Current cutback (refer to specifications) |
| Environment & Approbation | |
| Operating Ambient Temp. Range | -35°C to +60°C |
| Max Case Temperature (Tcase) | 90°C |
| Environmental Protection Rating | UL dry and damp |
| Agency Approbations | UL8750, UL1310, UL935, CSA-C22.2 No. 250.13-12, CSA C22.2 No. 223 |
| Electromagnetic Compliance | FCC Title 47 Part 15 Class A |
| Audible Noise | <24dB Class A |
| Weight | 1.77 Lbs / 0.80 kgs |

Xitanium 95W 1.0-2.75A 54V 0-10V INT

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

0-10V Dimming Curve

Dimming source current from the driver: 150µA (@ 0<Vdim<8V)


LED Current Tolerance at 2750mA \leq 5% over temperature and component variations

Minimum Dim Level: 5% of Iout (minimum 50mA)

Maximum output voltage on the dimming wires: 13V

Approved Dimmer List

| Manufacturer | Manufacturer Part Number |
|--------------|--|
| Lutron | Visit www.lutron.com/advance for a list of dimmers (Mark VII) that will work with this driver. |
| Leviton | IllumaTech IP7 series |
| Philips | Sunrise - SR1200ZTUNV |

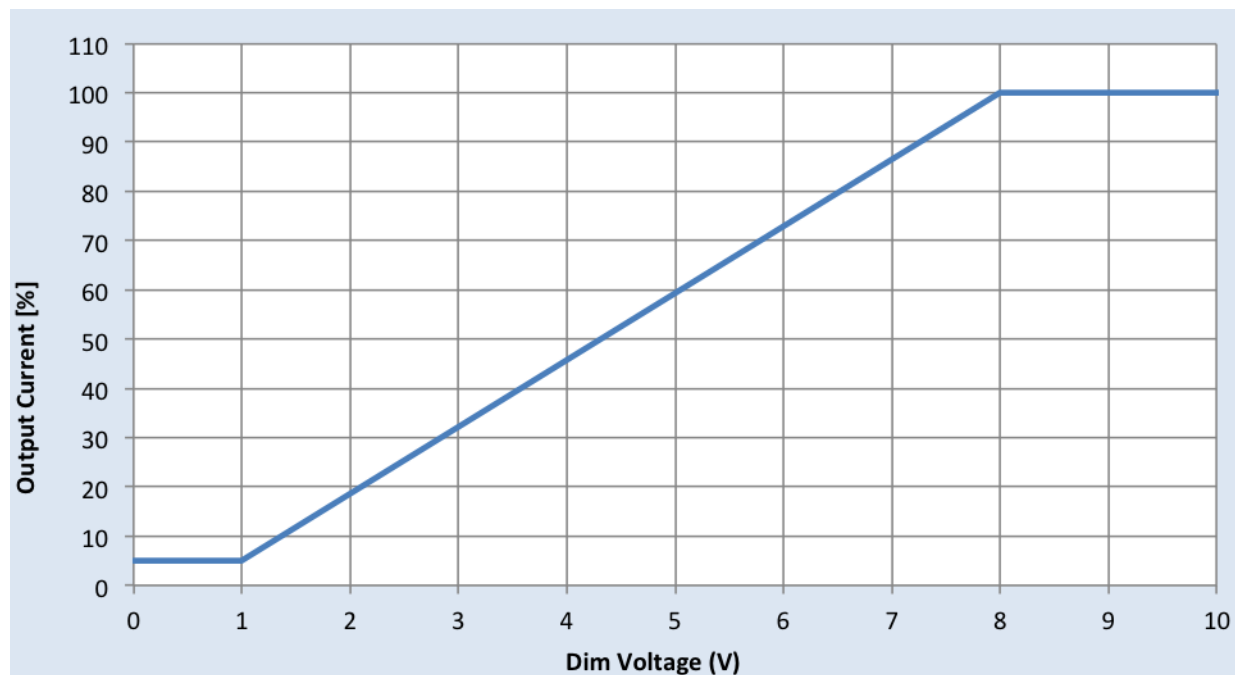


Xitanium 95W 1.0-2.75A 54V 0-10V INT

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

AOC (Adjustable Output Current) Settings (Rset)

| Rset (Ohms) | Current (mA) | Rset (Ohms) | Current (mA) |
|-------------|--------------|-------------|--------------|
| 0 | 1000 | 2400 | 1528 |
| 100 | 1029 | 2700 | 1575 |
| 110 | 1032 | 3000 | 1619 |
| 120 | 1035 | 3300 | 1661 |
| 130 | 1038 | 3600 | 1700 |
| 150 | 1044 | 3900 | 1737 |
| 160 | 1047 | 4300 | 1783 |
| 180 | 1052 | 4700 | 1826 |
| 200 | 1058 | 5100 | 1865 |
| 220 | 1064 | 5600 | 1912 |
| 240 | 1069 | 6200 | 1962 |
| 270 | 1077 | 6800 | 2008 |
| 300 | 1086 | 7500 | 2057 |
| 330 | 1094 | 8200 | 2102 |
| 360 | 1102 | 9100 | 2153 |
| 390 | 1110 | 10000 | 2199 |
| 430 | 1121 | 11000 | 2244 |
| 470 | 1131 | 12000 | 2284 |
| 510 | 1142 | 13000 | 2321 |
| 560 | 1154 | 15000 | 2383 |
| 620 | 1170 | 16000 | 2410 |
| 680 | 1185 | 18000 | 2458 |
| 750 | 1202 | 20000 | 2499 |
| 820 | 1218 | 22000 | 2534 |
| 910 | 1239 | 24000 | 2564 |
| 1000 | 1260 | 27000 | 2603 |
| 1100 | 1282 | 30000 | 2635 |
| 1200 | 1304 | 33000 | 2663 |
| 1300 | 1325 | 36000 | 2686 |
| 1500 | 1366 | 39000 | 2707 |
| 1600 | 1386 | 43000 | 2730 |
| 1800 | 1424 | 47000 | 2750 |
| 2000 | 1460 | >47000 | 2750 |
| 2200 | 1495 | | |

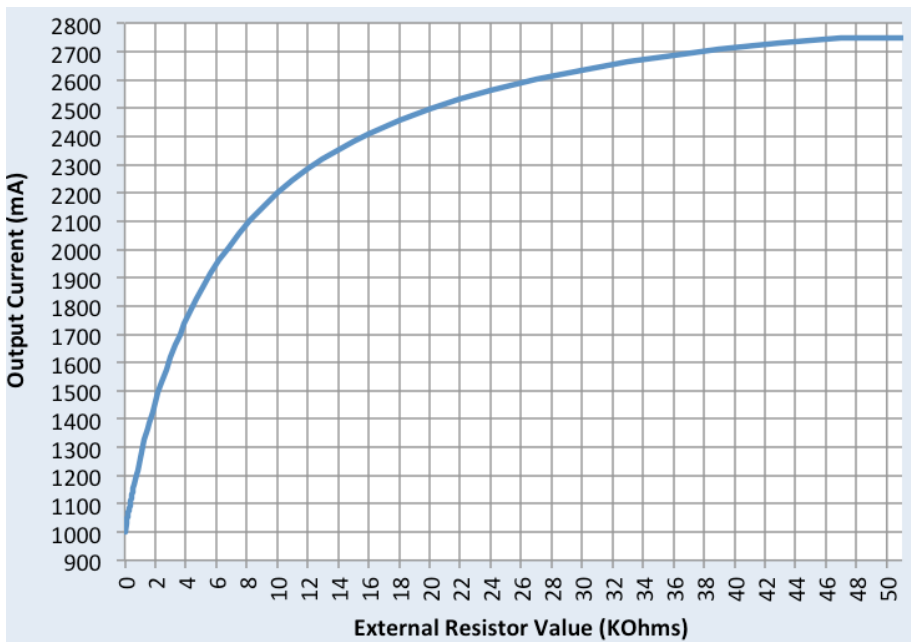

Driver will default to 2750mA when Rset is left open.


Xitanium 95W 1.0-2.75A 54V 0-10V INT

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

Operating Window

XI095C275V054DNF5

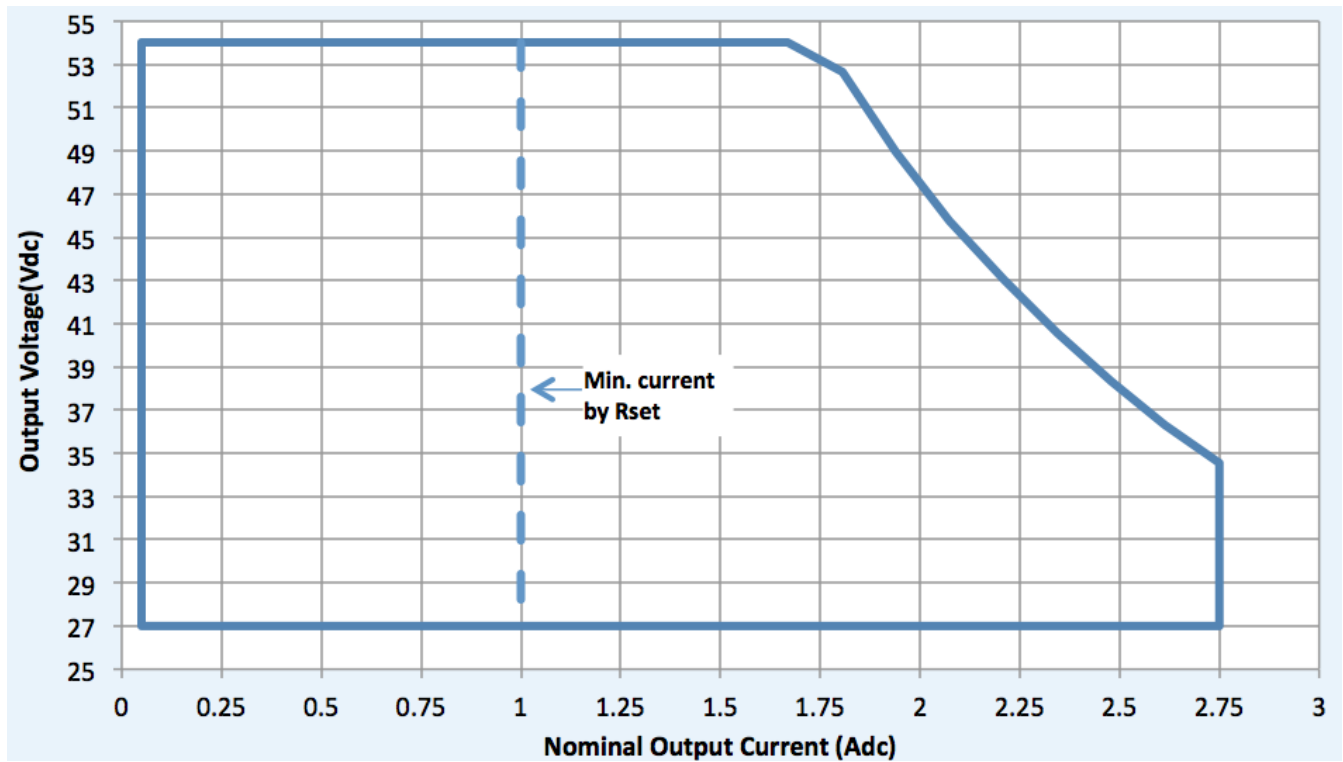


Xitanium 95W 1.0-2.75A 54V 0-10V INT


Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

Output Current Vs. External NTC Resistance

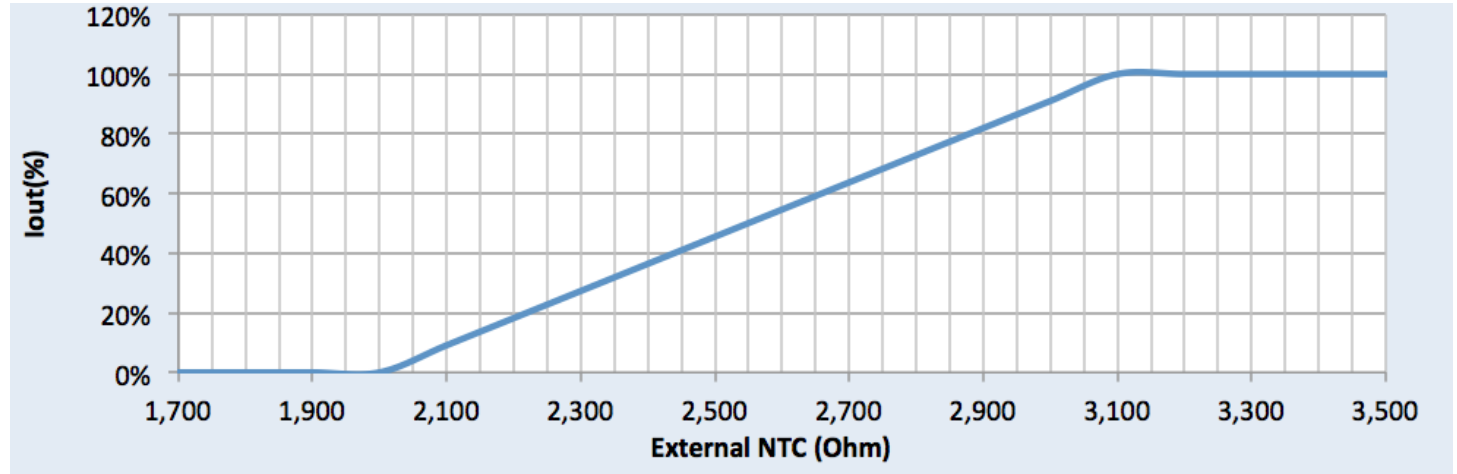

Output Current Vs. LED Module Temperature using 15kohm NTC

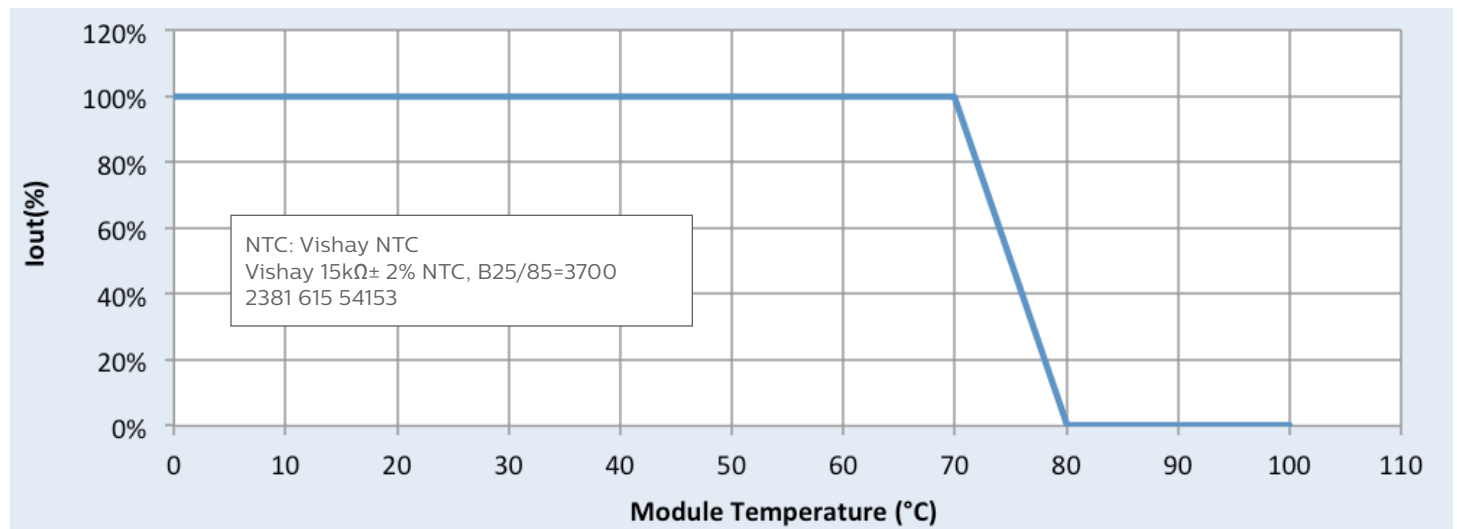


Xitanium 95W 1.0-2.75A 54V 0-10V INT


Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

Output Current Vs. Driver Case Temperature

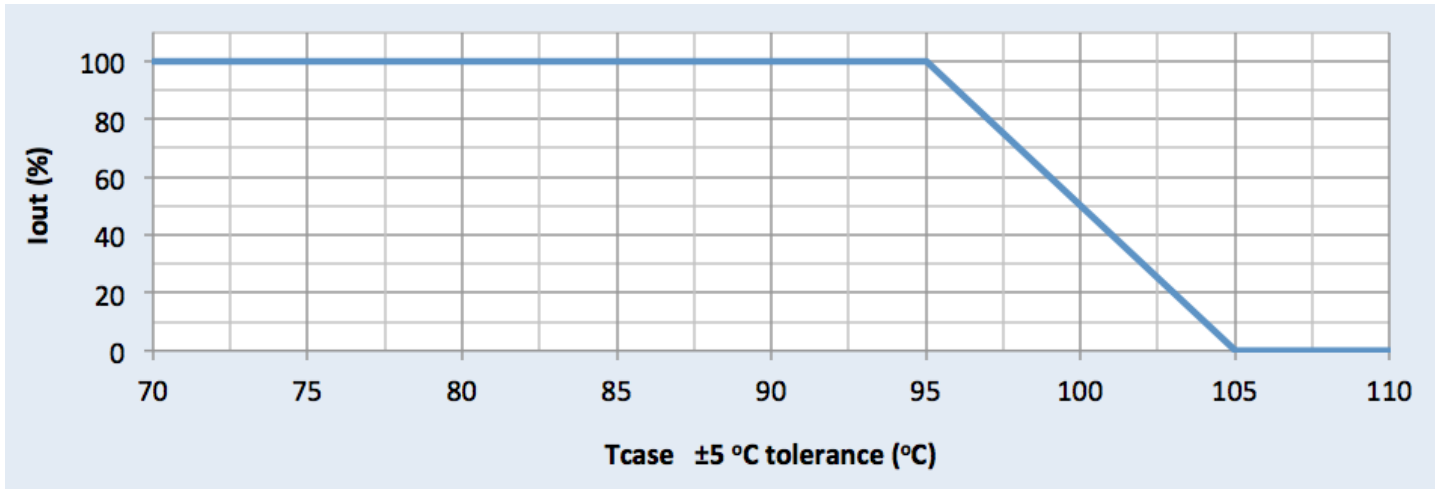

Driver Lifetime Vs. Driver Case Temperature

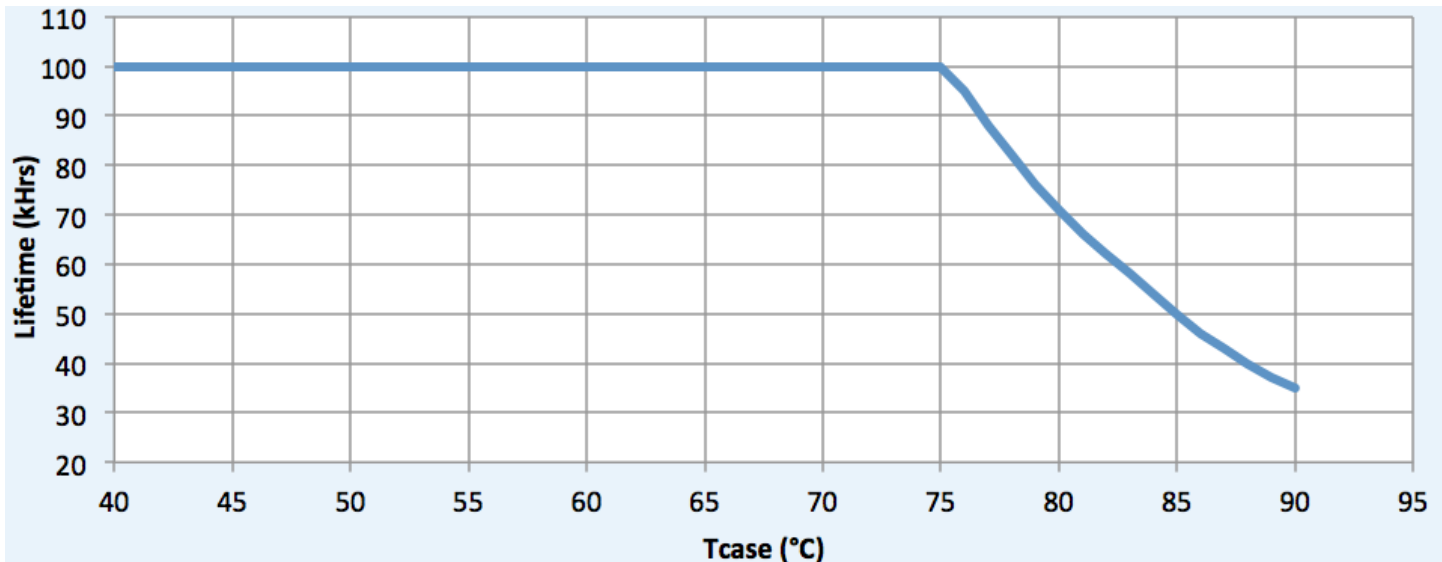


Xitanium 95W 1.0-2.75A 54V 0-10V INT


Performance Characteristics

Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments. The graphs are meant to be a guideline and not a specification.

Efficiency Vs. Output Voltage at 120Vac

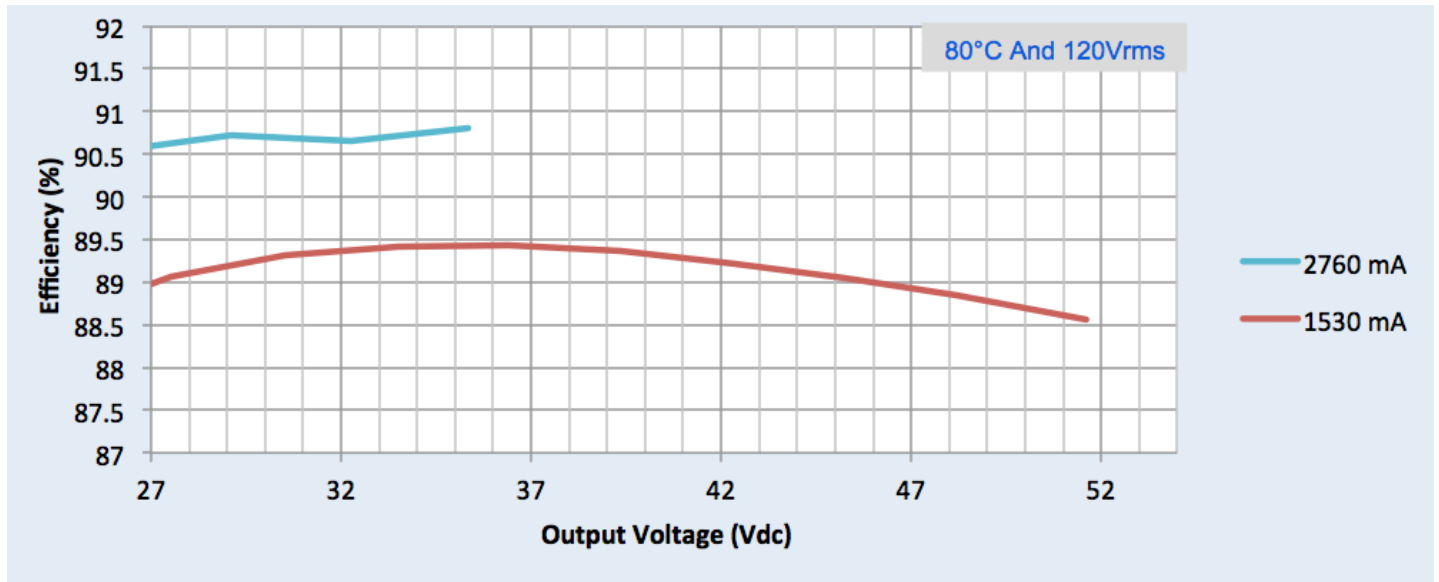

Efficiency Vs. Output Voltage at 277Vac

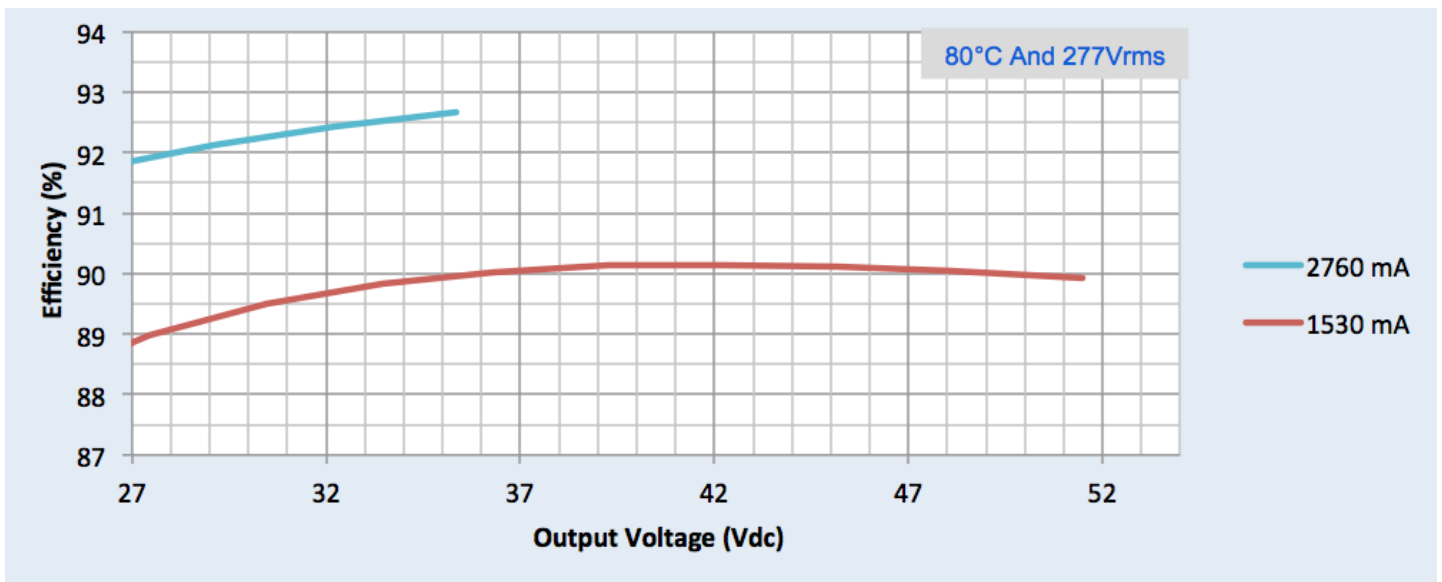


Xitanium 95W 1.0-2.75A 54V 0-10V INT


Performance Characteristics

Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments. The graphs are meant to be a guideline and not a specification.

Power Factor Vs. Output Power

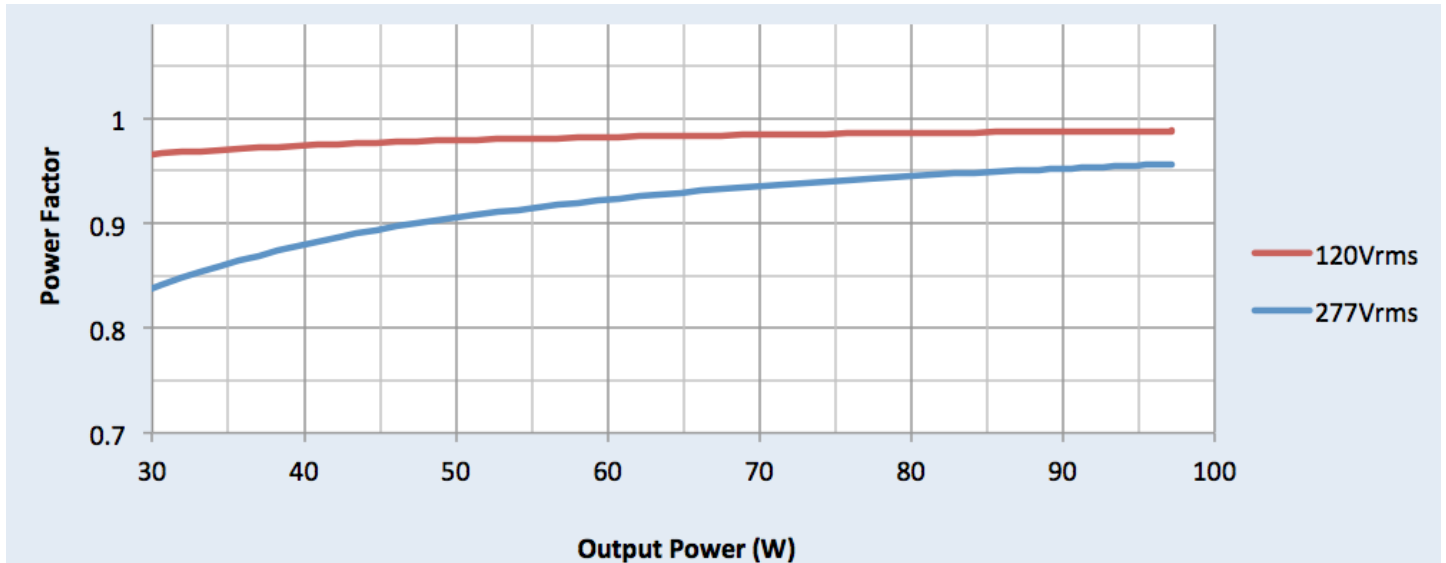


Total Harmonic Distortion (THD) Vs. Output Power

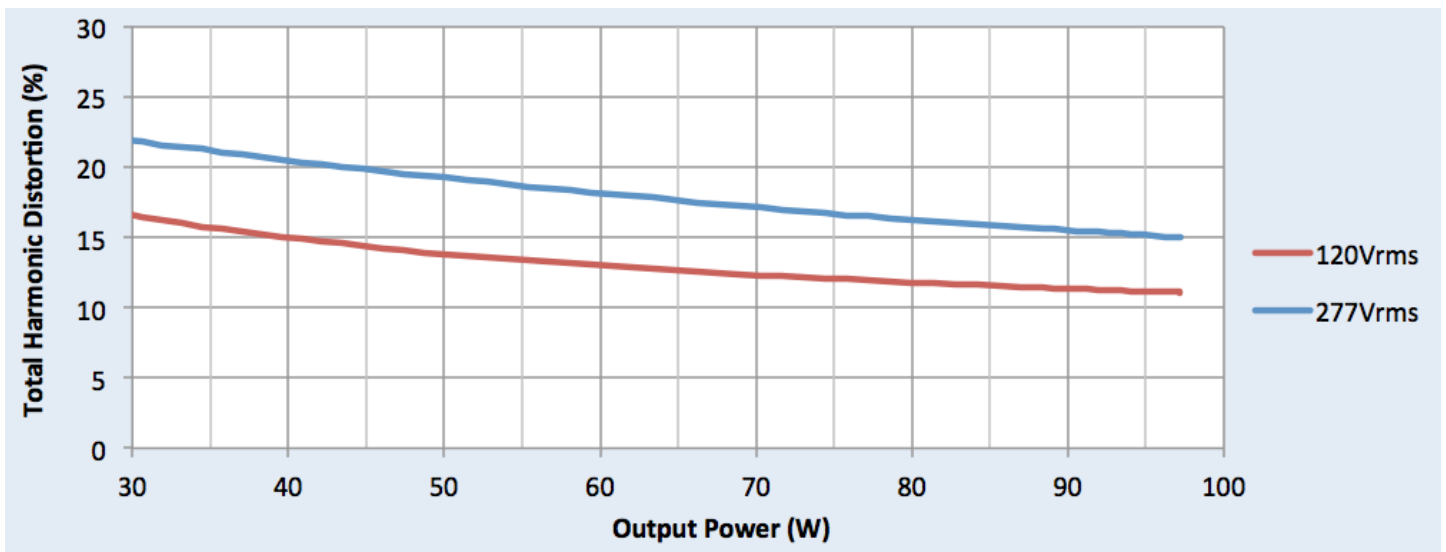

Xitanium 95W 1.0-2.75A 54V 0-10V INT

Inrush Current Info

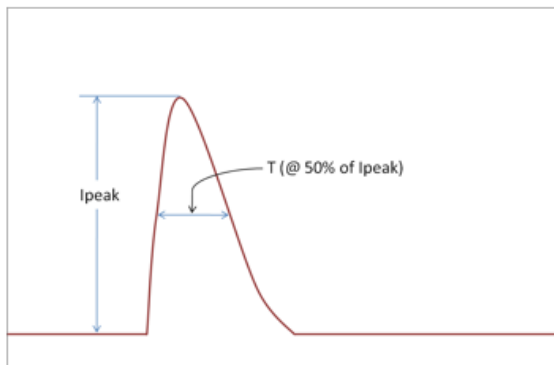

| V_{in} | I_{peak} | $T (@ 50\% \text{ of } I_{peak})$ |
|----------|------------|-----------------------------------|
| 120 Vrms | 50A | 142 μ S |
| 277 Vrms | 116A | 138 μ S |

Inrush current is measured at peak of the corresponding line voltage. Source impedance per NEMA 410.

Lightning Surge Info

| ANSI Surge Type | Differential Mode (L-N) | Common Mode (L-G, N-G, L&N-G) |
|--|-------------------------|-------------------------------|
| 100 kHz Ring Wave (w/t 30 μ s) | 6kV | 6kV |
| 1.2/50 μ s - 8/20 μ s Combination Wave (w/t 2 Ω) | 3kV | 3kV |

Isolation

| Isolation | Input | Output | 0-10V (Class 2) | Enclosure |
|-----------------|---------|---------|-----------------|-----------|
| Input | NA | 2xU+1kV | 2.5kVac | 2xU+1kV |
| Output | 2xU+1kV | NA | 2.5kVac | 500V |
| 0-10V (Class 2) | 2.5kVac | 2.5kVac | NA | 500V |
| Enclosure | 2xU+1kV | 500V | 500V | NA |

U = Max input voltage

UL Conditions of Acceptability

Please contact your Philips representative for a copy of the latest UL Conditions of Acceptability (COA).

© 2015 Koninklijke Philips N.V. All rights reserved.
Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.
philips.com/leddrivers



Philips Lighting North America Corporation
10275 W. Higgins Road, Rosemont IL 60018
Tel: 800-322-2086 Fax: 888-423-1882
Customer/Technical Service: 800-372-3331
OEM Support: 866-915-5886

Imported by: Philips Lighting
A division of Philips Electronics Ltd.
281 Hillmount Rd, Markham, ON, Canada L6C 2S3
Tel. 800-668-9008