


9290 015 07114	
Brand Name	Xitanium
Description	Xitanium 20W 0.7A 28V
Input Voltage	220 - 240V
Input Frequency	50 / 60 Hz
RoHS	Yes
Approbations	IS 15885 ( Part 2 / Sec 13 )
Status	BIS Certified

Output Power (W)	Output Voltage (V)	Output Current (A)	Efficiency at Max Load	Max Case Temp (°C)	Input Current (Arms)	Max Input Power (W)	Inrush Current (Apk/50%-µs)	THD @ Max Load (%)	Power Factor @ Max Load	Surge Protection Diff/Com(KV)	Weight (Kg)	Envir. Protection Rating
20	24 - 28	0.7	240V	75	240V	24	240V	≤ 10 @Max Load	≥ 0.95	4 / 4	0.1	Dry & Damp
			85		0.11		7/300					


### Wire Diagram

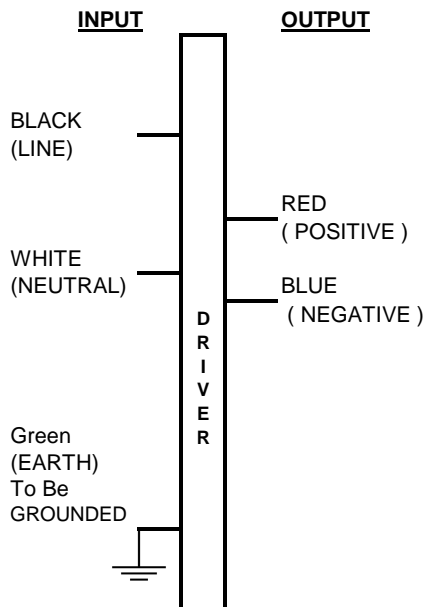

Input and output use lead-wires.  
Lead-Wires are 105C / 600V  
multistrand Copper wire with soldered ends

Lead Length  
Standard lead length is 110mm (±10mm)  
on all wires outside the can

### Enclosure

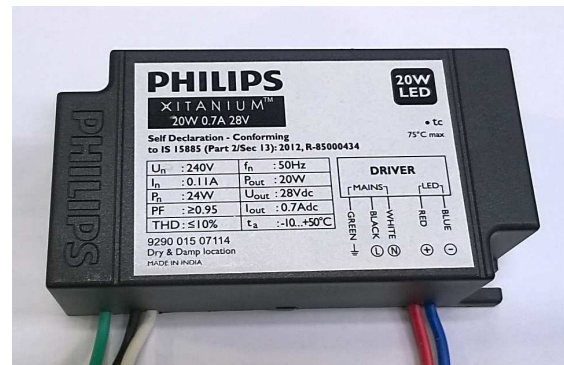

	(mm)
Case Length	92
Case Width	54
Case Height	32
Mounting Length	82
Mounting Width	44

	9290 015 07114
Brand Name	Xitanium
Description	Xitanium 20W 0.7A 28V
Input Voltage	220 - 240V
Input Frequency	50 / 60 Hz
RoHS	Yes
Approbations	IS 15885 ( Part 2 / Sec 13 )
Status	<a href="#">BIS Certified</a>

## PHILIPS

### XITANIUM™

20W 0.7A 28V

20W  
LED

• tc  
75°C max

**Self Declaration - Conforming**  
to IS 15885 (Part 2/Sec 13): 2012, R-85000434

$U_n$ : 240V	$f_n$ : 50Hz
$I_n$ : 0.11A	$P_{out}$ : 20W
$P_n$ : 24W	$U_{out}$ : 28Vdc
PF : $\geq 0.95$	$I_{out}$ : 0.7A dc
THD : $\leq 10\%$	$t_a$ : -10...+50°C

9290 015 07114  
Dry & Damp location  
MADE IN INDIA

**DRIVER**

Product Data	
Full product code	9290 015 07114
Full product name	Xitanium 20W 0.7A 28V
Net weight per piece	100 gms
Dimming	None ( FIXED )
Ambient Temp. Range	-10C to +50C
Line Voltage ( AC Nominal)	220 - 240V +/-10%
Line Voltage ( Output Power Regulation)	140 - 277V
Line Current	0.11A @ 240V
Line Frequency	50 Hz
Envir. Protection Rating	Dry and Damp
	Conformal coated Driver for protection from moisture & humidity
	Suitable for Outdoor Application
Life at Tc 65 drgree C	50000 hrs ( nom. )
Ingress Protection	IP 20
Tc - Max.	75°C
Tc - Life	65°C
Inrush Current	7Apk @ 240V
Max. Driver number on MCB 16A ( Type B )	24 ( max. )
Input Over Voltage	Auto Shutdown at 300 ± 10V AC
	Can Survive input Voltage Stress of 320V for 48 hours
	Can Survive input Voltage Stress of 350V for 2 hours
LED Current Tolerance	+/- 5%of Imax
Earth Leakage Current	0.7 mA Pk ( max)
Output Current Ripple	45% ( ripple = pk / avg. )
THD Total	$\leq 10\%$ @ Full Load @ 240V Supply
P.F. at Max. Load	$\geq 0.95$
Isolation ( Input - Output )	Basic insulation - 1.5KV
Protection	Short Circuit and Open Circuit Protection for LED + and LED -
Standby Power	$\leq 0.5W$

	9290 015 07114
Brand Name	Xitanium
Description	Xitanium 20W 0.7A 28V
Input Voltage	220 - 240V
Input Frequency	50 / 60 Hz
RoHS	Yes
Approbations	IS 15885 ( Part 2 / Sec 13 )
Status	<a href="#">BIS Certified</a>

## Installation & Application Notes :

### Section I - Physical Characteristics

- 1.1 LED Driver shall be installed inside an electrical enclosure
- 1.2 Wiring inside electrical enclosure shall comply with 600V/105°C rating or higher

### Section II - Performance

- 2.1 LED Driver has a rated lifetime of 50,000 hours @  $T_c \leq 65^\circ\text{C}$
- 2.2 LED Driver tolerates sustained open circuit and short circuit output conditions without damage
- 2.3 LED Driver maximum allowable case temperature is  $75^\circ\text{C}$  - see product label for measurement location
- 2.4 LED Driver complies with the requirements of IS 15885 ( Part 2 / Sec 13 )

### ELECTRICAL RATINGS :

Model	Input, 50/60 Hz		Output ( nominal )		
	V	A	V DC	A DC	Watts
Xitanium 20W 0.7A 28V	220 - 240	0.11	28	0.7	20

### TECHNICAL CONSIDERATIONS ( NOT FOR FIELD REPRESENTATIVES USE ) :

#### Section III - Conditions of acceptability

When installed in the end-use equipment, the following are among the considerations to be made :

- 3.1 The equipment shall be installed in compliance with the enclosure, mounting, spacing, casualty and segregation requirements of the ultimate application.
- 3.2 The driver case must be grounded in the end-use application.
- 3.3 The driver is suitable for use in "Damp" and "Dry" locations.
- 3.4 When the drivers are installed in the end-use application, the case temperature should not exceed the temperature limits specified in the following table:

Model	Input Voltage, Hz	Max Case @ TC , °C
Xitanium 20W 0.7A 28V	220 - 240 , 50/60	75

- 3.5 The leakage current test should be repeated in the end device.

Model	Input Voltage, Hz	Leakage Current
Xitanium 20W 0.7A 28V	220 - 240 , 50/60	0.7mA max.