




Metal
Halide
Lamp Ballast

Catalog Number 71A5005P
For 35/39W M130
60 Hz HX-HPF
Status: Active

DIMENSIONS AND DATA

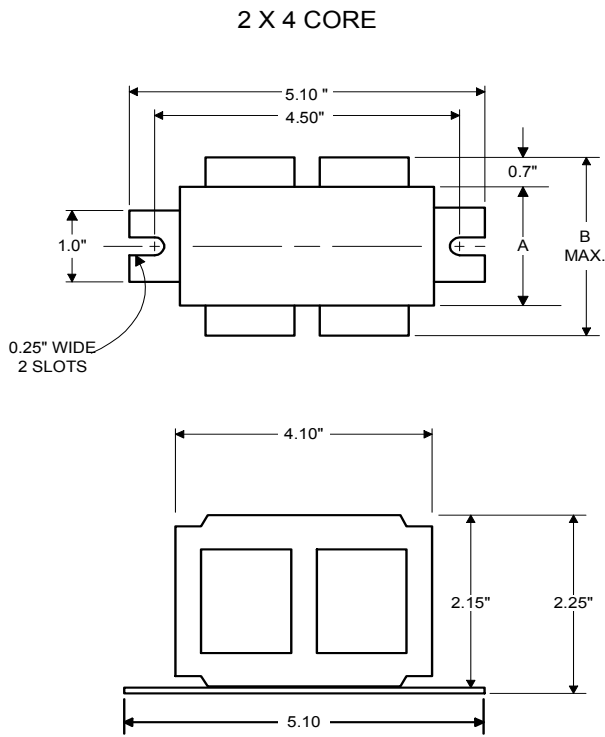

INPUT VOLTS	120				
CIRCUIT TYPE	HX-HPF				
POWER FACTOR (min)	90%				
REGULATION					
Line Volts	±5%				
Lamp Watts	±10%				
LINE CURRENT (Amps)					
Operating.....	0.50				
Open Circuit.....	1.10				
Starting.....	0.45				
UL TEMPERATURE RATINGS					
Insulation Class	H(180°C)				
Coil Temperature Code	1029	A			
MIN. AMBIENT STARTING TEMP.	-20°F or -30°C				
NOM. OPEN CIRCUIT VOLTAGE	230				
INPUT VOLTAGE AT LAMP DROPOUT.....	100				
INPUT WATTS	55				
RECOMMENDED FUSE (Amps).....	3				
CORE and COIL					
Dimension (A)	0.83				
Dimension (B)	1.70				
Weight (lbs.)	2				
Lead Lengths	12"				
CAPACITOR REQUIREMENT					
Microfarads	28.0				
Volts (min.)	120				
Fault Current Withstand (amps)					
60 Hz TEST PROCEDURES (Refer to Advance Test Procedure for HID Ballasts - Form 1270)					
High Potential Test (Volts)					
1 minute	2000				
2 seconds	2500				
Open Circuit Voltage Test (Volts)	205-255				
Short-Circuit Current Test (Amps)					
Secondary Current	0.60-0.75				
Input Current.....	0.30-0.50	-	-	-	-

Capacitor: 7C280M12RA



Capacitance: 28
Dia/Oval Dim: 1.65
Height: 2.75
Temp Rating: 105°C

Wiring Diagram:

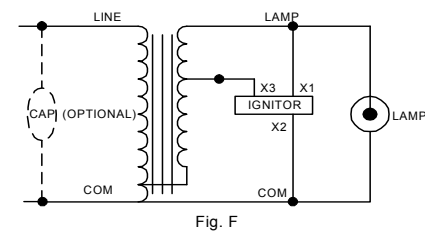


Fig. F

Ordering Information

Order Suffix	Description

Ignitor: LI533-H4



Ballast to Lamp Distance (BTL) = 15 feet
Temp Rating: 105°C

Data is based upon tests performed by Advance Transformer in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.