

# PHILIPS

## LED Modules

### Fortimo SLM

#### 1211 L19 2828 G6



Philips Fortimo LED spotlight module (SLM) gen 6 continues to focus on the combination of quality of light and performance. By offering the CoB separate from the holder, even more flexibility in possible system combinations and specifications is achieved. This results in an extensive portfolio of lumen ranges, CCTs and spectra. Please also check the online Easy Design-in Tool for your perfect system combination ([www.na.easydesignintool.philips.com](http://www.na.easydesignintool.philips.com)).

#### Ordering Data

Commercial product name	12NC	Minimum order quantity
Fortimo SLM C 730 1211 L19 2828 G6	9290 014 34906	10
Fortimo SLM C 740 1211 L19 2828 G6	9290 014 47206	10
Fortimo SLM C 750 1211 L19 2828 G6	9290 014 35006	10
Fortimo SLM C 757 1211 L19 2828 G6	9290 014 35106	10
Fortimo SLM C 827 1211 L19 2828 G6	9290 014 47306	10
Fortimo SLM C 830 1211 L19 2828 G6	9290 014 47406	10
Fortimo SLM C 835 1211 L19 2828 G6	9290 014 47506	10
Fortimo SLM C 840 1211 L19 2828 G6	9290 014 47606	10
Fortimo SLM C 850 1211 L19 2828 G6	9290 014 47706	10
Fortimo SLM C 857 1211 L19 2828 G6	9290 014 47806	10
Fortimo SLM C 927 1211 L19 2828 G6	9290 014 47906	10
Fortimo SLM C 930 1211 L19 2828 G6	9290 014 48006	10

Not all products are currently available as make-to-stock. Please contact your local Philips representative for specific availability and lead time.

# Fortimo SLM 1211 L19 2828 G6

## Features

- Excellent quality of light available for all applications
- Extensive range of CCT
- Small LES for narrow beam angles and small reflector designs
- Flexibility to select a different lumen output between 800 lm and 10000 lm
- State-of-the-art chip-on-board (CoB) technology, enabling high system efficacy
- System proposition (CoB + holder + driver)

- Flexibility to optimize luminaire performance (lm/W or high lumen output)
- Philips Advance Xitanium LED window drivers with SimpleSet technology for maximum flexibility
- Mini drivers for smallest possible luminaire designs
- Three dedicated product lines:
  - SLM gen 6 premium white
  - SLM gen 6 crisp white
  - SLM gen 6 food

## Benefits

- 5-year limited system warranty with over 50,000 hours lifetime<sup>1</sup>

## Applications

- Architectural lighting
- Retail spot lighting
- Recessed downlight

## Drive Currents

Parameter	Nominal*	Life**	Max***	Unit
Fortimo LED SLM 1211 L19 2828 G6	1200	2000	2000	mA

## Module Temperatures

Parameter	Nominal*	Life**	Max***	Unit
Tc (case temperature at Tc point)	85	85	95	°C

\* Nominal value at which typical performance is specified

\*\* Value at which life time is specified

\*\*\* Maximum value for safe operation, do not operate above this value

1. View limited warranty at <http://www.usa.lighting.philips.com/support/support/warranty> for details and restrictions.

# Fortimo SLM 1211 L19 2828 G6


## Optical Characteristics – Table per CCT

### Fortimo SLM C 730 1211 L19 2828 G6

Parameter	Min	Typ	Max	Unit
Luminous Flux	5550	6170	6790	lm
Module Efficiency		149		lm/W
Correlated Color Temperature (CCT)		5000		K
Color Coordinates (CIEx, CIEy)		(0.434, 0.403)		–
Color Consistency			3	SDCM
CRI	70	72		–

Measurement tolerances are: ±5% on flux, ±6% on efficiency, +0.005 on x,y, and ±1.5 on CRI.

Measurement precision for flux +/- 5%.  
Measurement precision for efficacy +/- 6%.  
Measurement precision for x, y +/- 0.005.  
Measurement precision for CRI +/- 1.5.

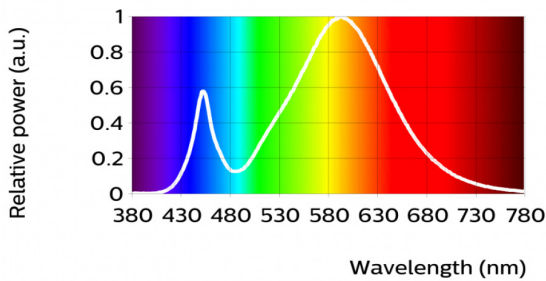


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
67	83	94	65	66	75	77	44	-30	59	57	48	70	97

### Fortimo SLM C 740 1211 L19 2828 G6

Parameter	Min	Typ	Max	Unit
Luminous Flux	5920	6570	7230	lm
Module Efficiency		158		lm/W
Correlated Color Temperature (CCT)		4000		K
Color Coordinates (CIEx, CIEy)		(0.382, 0.380)		–
Color Consistency			3	SDCM
CRI	70	72		–

Measurement tolerances are: ±5% on flux, ±6% on efficiency, +0.005 on x,y, and ±1.5 on CRI.

Measurement precision for flux +/- 5%.  
Measurement precision for efficacy +/- 6%.  
Measurement precision for x, y +/- 0.005.  
Measurement precision for CRI +/- 1.5.

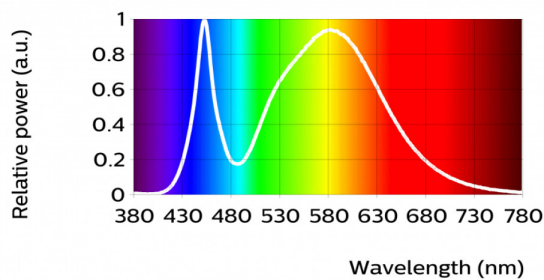

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
71	81	89	71	70	72	83	54	54	54	65	43	73	93	


# Fortimo SLM 1211 L19 2828 G6

## Optical Characteristics – Table per CCT

Fortimo SLM C 750 1211 L19 2828 G6				
Parameter	Min	Typ	Max	Unit
Luminous Flux	5900	6560	7210	lm
Module Efficiency		158		lm/W
Correlated Color Temperature (CCT)		5000		K
Color Coordinates (CIEx, CIEy)		(0.345, 0.355)		–
Color Consistency			3	SDCM
CRI	70	72		–

Measurement tolerances are: ±5% on flux, ±6% on efficiency, +0.005 on x,y, and ±1.5 on CRI.

Measurement precision for flux +/- 5%.  
Measurement precision for efficacy +/- 6%.  
Measurement precision for x, y +/- 0.005.  
Measurement precision for CRI +/- 1.5.

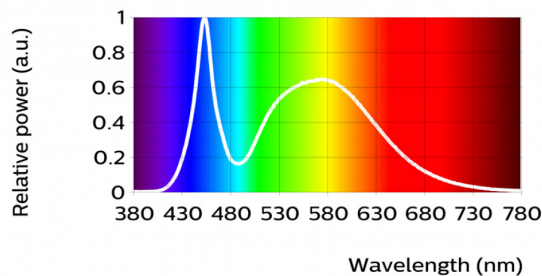


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
73	82	86	74	73	73	83	59	-18	54	69	47	75	92

Fortimo SLM C 757 1211 L19 2828 G6				
Parameter	Min	Typ	Max	Unit
Luminous Flux	5740	6370	7010	lm
Module Efficiency		154		lm/W
Correlated Color Temperature (CCT)		5700		K
Color Coordinates (CIEx, CIEy)		(0.329, 0.342)		–
Color Consistency			3	SDCM
CRI	70	72		–

Measurement tolerances are: ±5% on flux, ±6% on efficiency, +0.005 on x,y, and ±1.5 on CRI.

Measurement precision for flux +/- 5%.  
Measurement precision for efficacy +/- 6%.  
Measurement precision for x, y +/- 0.005.  
Measurement precision for CRI +/- 1.5.

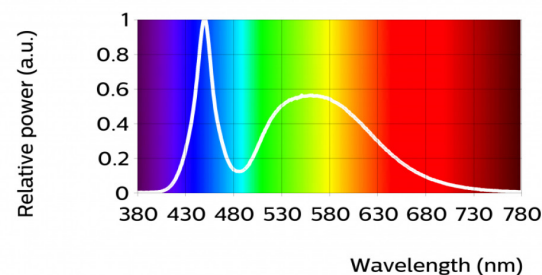

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
71	77	80	74	72	68	82	61	-23	45	71	43	72	89


# Fortimo SLM 1211 L19 2828 G6

## Optical Characteristics – Table per CCT

Fortimo SLM C 827 1211 L19 2828 G6				
Parameter	Min	Typ	Max	Unit
Luminous Flux	5050	5610	6170	lm
Module Efficiency		135		lm/W
Correlated Color Temperature (CCT)		2700		K
Color Coordinates (CIEx, CIEy)		(0.458, 0.410)		–
Color Consistency			3	SDCM
CRI	80	82		–

Measurement tolerances are: ±5% on flux, ±6% on efficiency, +0.005 on x,y, and ±1.5 on CRI.

Measurement precision for flux +/- 5%.  
Measurement precision for efficacy +/- 6%.  
Measurement precision for x, y +/- 0.005.  
Measurement precision for CRI +/- 1.5.

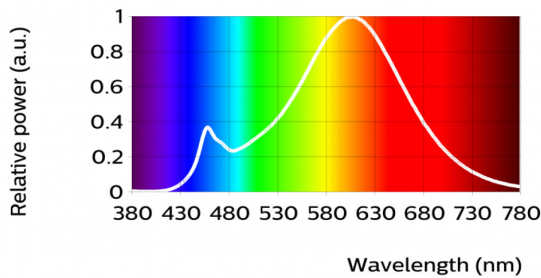


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
79	92	94	76	79	90	82	59	59	82	72	73	82	97	

Fortimo SLM C 830 1211 L19 2828 G6				
Parameter	Min	Typ	Max	Unit
Luminous Flux	5190	5770	6350	lm
Module Efficiency		139		lm/W
Correlated Color Temperature (CCT)		3000		K
Color Coordinates (CIEx, CIEy)		(0.434, 0.403)		–
Color Consistency			3	SDCM
CRI	80	82		–

Measurement tolerances are: ±5% on flux, ±6% on efficiency, +0.005 on x,y, and ±1.5 on CRI.

Measurement precision for flux +/- 5%.  
Measurement precision for efficacy +/- 6%.  
Measurement precision for x, y +/- 0.005.  
Measurement precision for CRI +/- 1.5.

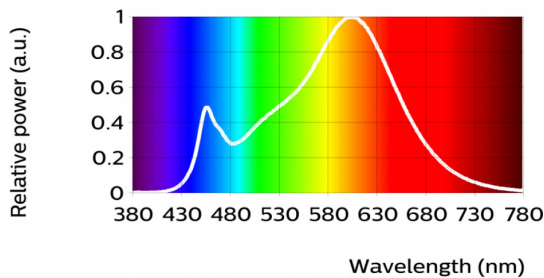

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
83	94	93	80	84	94	81	59	59	87	80	76	86	97	

# Fortimo SLM 1211 L19 2828 G6


## Optical Characteristics – Table per CCT

### Fortimo SLM C 835 1211 L19 2828 G6

Parameter	Min	Typ	Max	Unit
Luminous Flux	5300	5890	6480	lm
Module Efficiency		142		lm/W
Correlated Color Temperature (CCT)		3500		K
Color Coordinates (CIEx, CIEy)		(0.407, 0.392)		–
Color Consistency			3	SDCM
CRI	80	82		–

Measurement tolerances are: ±5% on flux, ±6% on efficiency, +0.005 on x,y, and ±1.5 on CRI.

Measurement precision for flux +/- 5%.  
Measurement precision for efficacy +/- 6%.  
Measurement precision for x, y +/- 0.005.  
Measurement precision for CRI +/- 1.5.

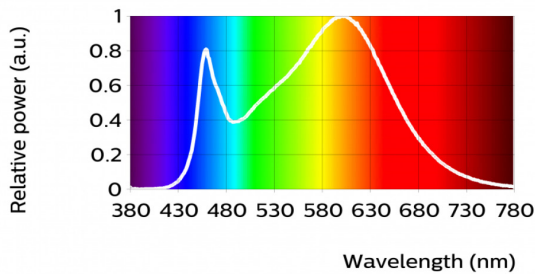


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
86	96	93	80	85	94	83	65	65	90	79	70	89	97	

### Fortimo SLM C 840 1211 L19 2828 G6

Parameter	Min	Typ	Max	Unit
Luminous Flux	5480	6090	6700	lm
Module Efficiency		146		lm/W
Correlated Color Temperature (CCT)		4000		K
Color Coordinates (CIEx, CIEy)		(0.382, 0.380)		–
Color Consistency			3	SDCM
CRI	80	82		–

Measurement tolerances are: ±5% on flux, ±6% on efficiency, +0.005 on x,y, and ±1.5 on CRI.

Measurement precision for flux +/- 5%.  
Measurement precision for efficacy +/- 6%.  
Measurement precision for x, y +/- 0.005.  
Measurement precision for CRI +/- 1.5.

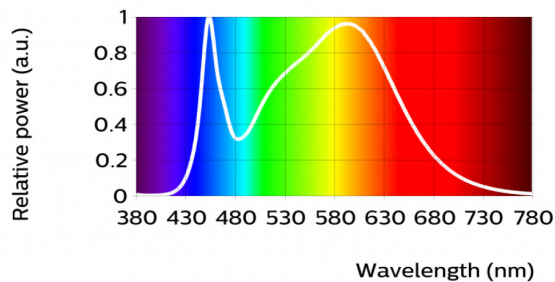

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80	89	96	79	80	85	86	63	63	74	77	58	82	98	

# Fortimo SLM 1211 L19 2828 G6


## Optical Characteristics – Table per CCT

### Fortimo SLM C 850 1211 L19 2828 G6

Parameter	Min	Typ	Max	Unit
Luminous Flux	5480	6090	6700	lm
Module Efficiency		146		lm/W
Correlated Color Temperature (CCT)		5000		K
Color Coordinates (CIEx, CIEy)		(0.345, 0.355)		–
Color Consistency			3	SDCM
CRI	80	82		–

Measurement tolerances are: ±5% on flux, ±6% on efficiency, +0.005 on x,y, and ±1.5 on CRI.

Measurement precision for flux +/- 5%.  
Measurement precision for efficacy +/- 6%.  
Measurement precision for x, y +/- 0.005.  
Measurement precision for CRI +/- 1.5.

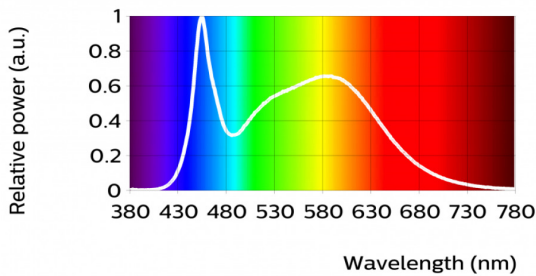


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
83	92	95	80	82	87	86	68	68	79	78	58	86	98	

### Fortimo SLM C 857 1211 L19 2828 G6

Parameter	Min	Typ	Max	Unit
Luminous Flux	5300	5890	6480	lm
Module Efficiency		142		lm/W
Correlated Color Temperature (CCT)		5700		K
Color Coordinates (CIEx, CIEy)		(0.329, 0.342)		–
Color Consistency			3	SDCM
CRI	80	82		–

Measurement tolerances are: ±5% on flux, ±6% on efficiency, +0.005 on x,y, and ±1.5 on CRI.

Measurement precision for flux +/- 5%.  
Measurement precision for efficacy +/- 6%.  
Measurement precision for x, y +/- 0.005.  
Measurement precision for CRI +/- 1.5.

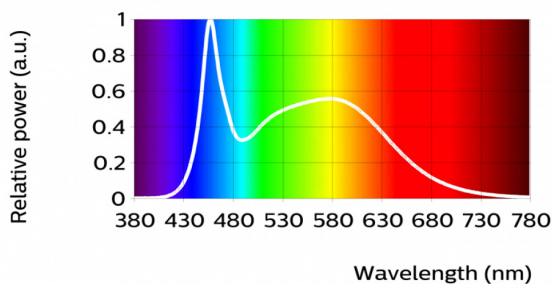

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
82	93	95	79	83	88	86	68	68	82	78	61	87	98	

# Fortimo SLM 1211 L19 2828 G6


## Optical Characteristics – Table per CCT

### Fortimo SLM C 927 1211 L19 2828 G6

Parameter	Min	Typ	Max	Unit
Luminous Flux	4180	4640	5110	lm
Module Efficiency		112		lm/W
Correlated Color Temperature (CCT)		2700		K
Color Coordinates (CIEx, CIEy)		(0.458, 0.410)		–
Color Consistency			3	SDCM
CRI	90	92		–

Measurement tolerances are: ±5% on flux, ±6% on efficiency, +0.005 on x,y, and ±1.5 on CRI.

Measurement precision for flux +/- 5%.  
Measurement precision for efficacy +/- 6%.  
Measurement precision for x, y +/- 0.005.  
Measurement precision for CRI +/- 1.5.

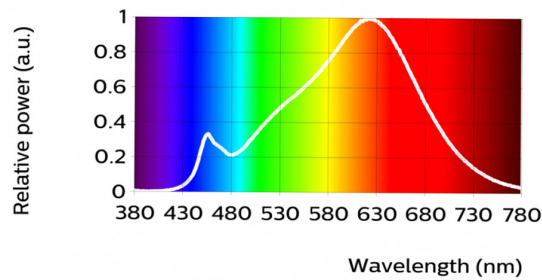


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
92	96	99	91	91	96	91	79	79	90	91	81	93	99	

### Fortimo SLM C 930 1211 L19 2828 G6

Parameter	Min	Typ	Max	Unit
Luminous Flux	4380	4860	5350	lm
Module Efficiency		117		lm/W
Correlated Color Temperature (CCT)		3000		K
Color Coordinates (CIEx, CIEy)		(0.434, 0.403)		–
Color Consistency			3	SDCM
CRI	90	92		–

Measurement tolerances are: ±5% on flux, ±6% on efficiency, +0.005 on x,y, and ±1.5 on CRI.

Measurement precision for flux +/- 5%.  
Measurement precision for efficacy +/- 6%.  
Measurement precision for x, y +/- 0.005.  
Measurement precision for CRI +/- 1.5.

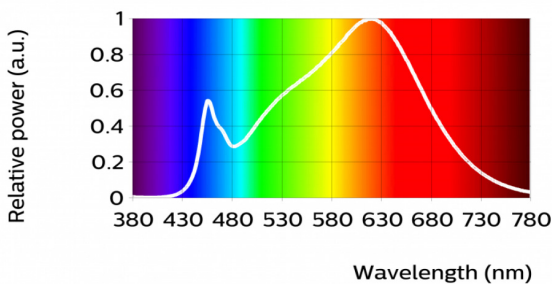


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
93	97	99	91	92	96	91	81	81	92	91	77	94	99	




# Fortimo SLM 1211 L19 2828 G6

## Beam Shape


Bare CoB

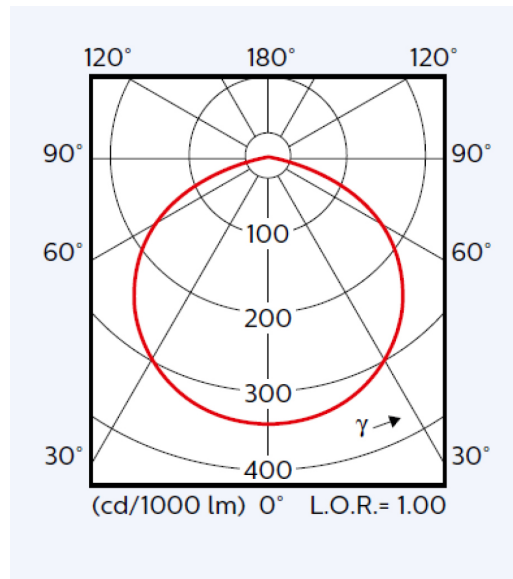

CoB with a standard/downlight/Zhaga poke-in holder

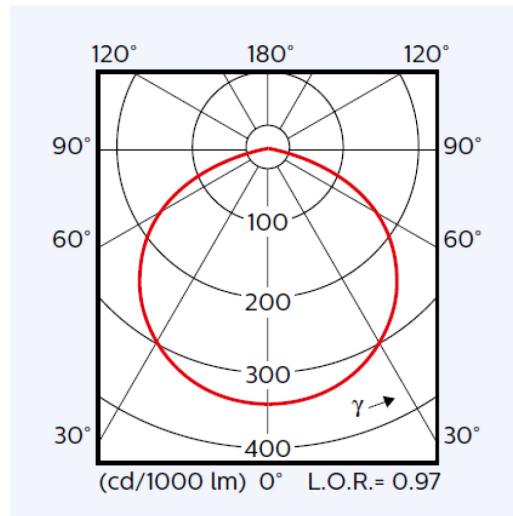

CoB with a poke-in holder

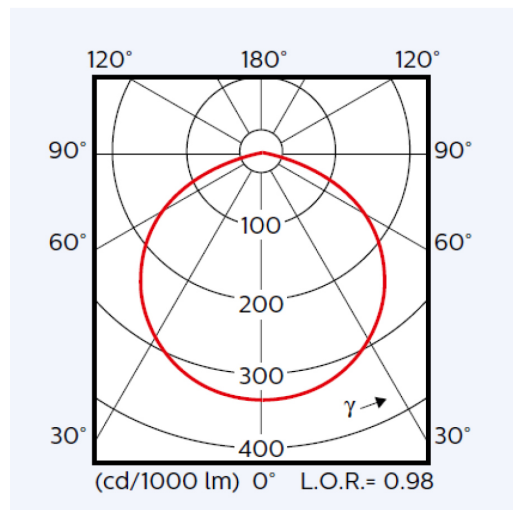

# Fortimo SLM 1211 L19 2828 G6

---

[Fortimo SLM C 730 1211 L19 2828 G6](#)

[Fortimo SLM C 740 1211 L19 2828 G6](#)

[Fortimo SLM C 750 1211 L19 2828 G6](#)

[Fortimo SLM C 757 1211 L19 2828 G6](#)

[Fortimo SLM C 857 1211 L19 2828 G6](#)

Parameter	Min	Typ	Max	Unit
Forward Voltage		34.7	37.2	V
Power Consumption		41.6	44.6	W
Thermal Power		22.9		W

Measurement precision for Vf +/- 3%. Measurement precision for power +/- 3.3%.

[Fortimo SLM C 827 1211 L19 2828 G6](#)

[Fortimo SLM C 830 1211 L19 2828 G6](#)

[Fortimo SLM C 835 1211 L19 2828 G6](#)

[Fortimo SLM C 840 1211 L19 2828 G6](#)

[Fortimo SLM C 850 1211 L19 2828 G6](#)

Parameter	Min	Typ	Max	Unit
Forward Voltage		34.7	37.2	V
Power Consumption		41.6	44.6	W
Thermal Power		24.0		W

Measurement precision for Vf +/- 3%. Measurement precision for power +/- 3.3%.

[Fortimo SLM C 927 1211 L19 2828 G6](#)

[Fortimo SLM C 930 1211 L19 2828 G6](#)

Parameter	Min	Typ	Max	Unit
Forward Voltage		34.7	37.2	V
Power Consumption		41.6	44.6	W
Thermal Power		25.5		W


Measurement precision for Vf +/- 3%. Measurement precision for power +/- 3.3%.

# Fortimo SLM 1211 L19 2828 G6

## Tuning Information


Flux and efficacy vs. current (at Tc nominal)

I [mA]	Flux [%]	Efficacy [%]
500	46	118
750	67	112
1050	90	104
1200	100	100
1300	107	98
1400	113	95
1500	120	93
2000	149	84

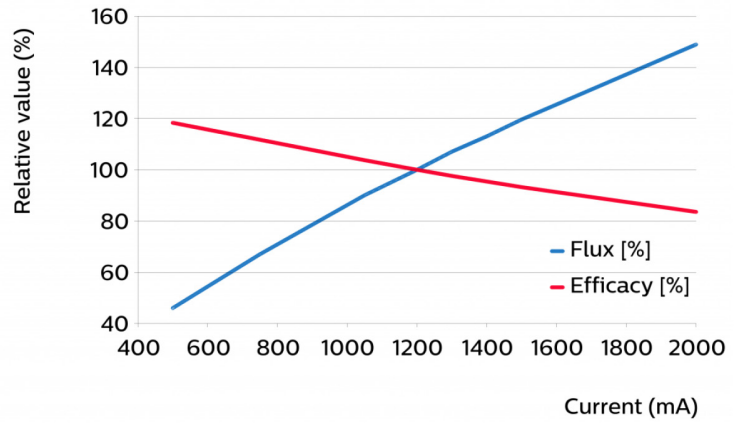

Flux and efficacy vs. temperature at Tc (at I nominal)


Tcase [°C]	Flux [%]	Efficacy [%]
55	107	106
65	105	104
75	102	102
85	100	100
95	97	98

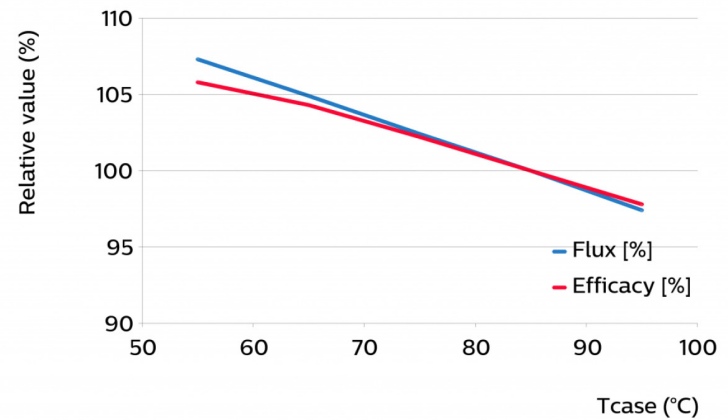


# Fortimo SLM 1211 L19 2828 G6

## Lumen Maintenance

Lumen maintenance at I-life and Tc-life conditions

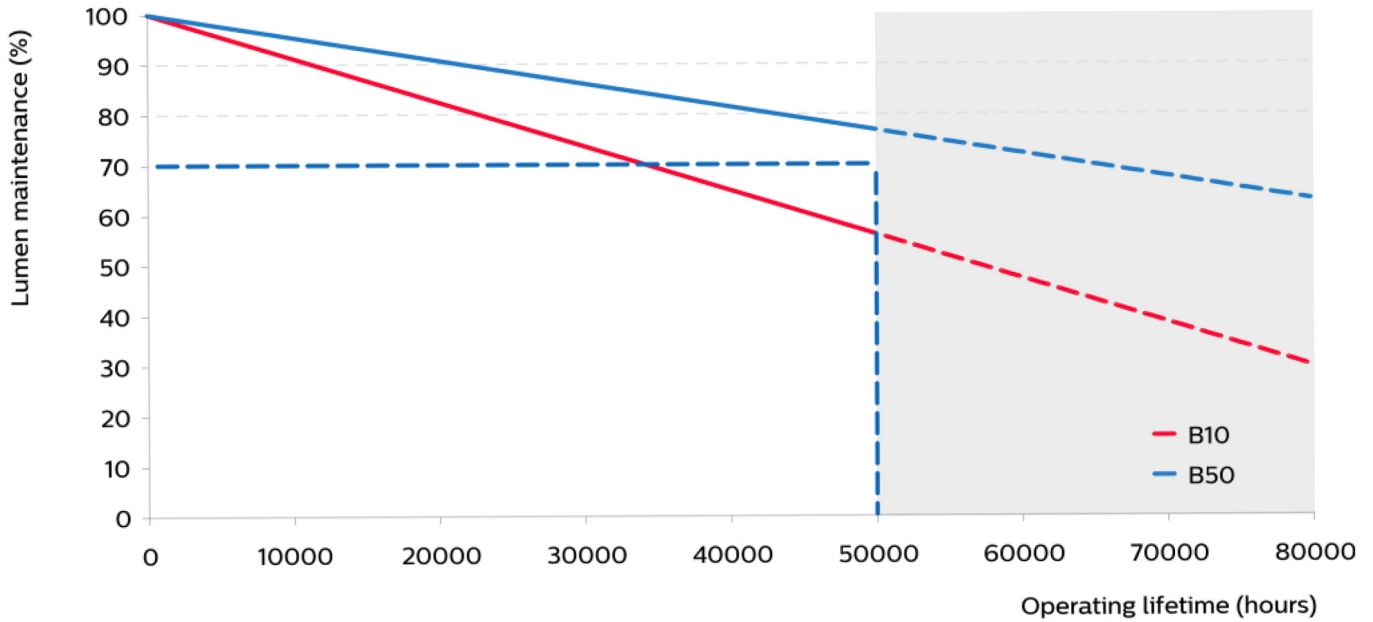

Lumen maintenance for B50 at current I-life conditions

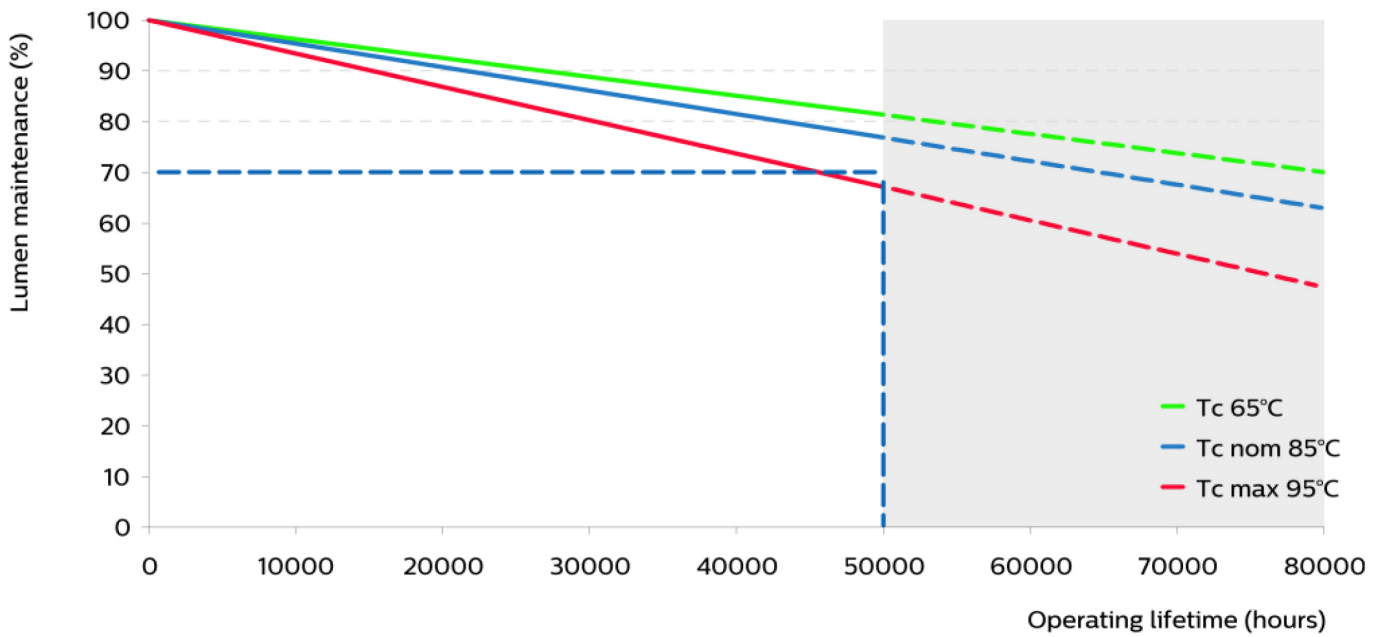


# Fortimo SLM 1211 L19 2828 G6

## Mechanical Characteristics

- Fortimo SLM C 730 1211 L19 2828 G6
- Fortimo SLM C 740 1211 L19 2828 G6
- Fortimo SLM C 750 1211 L19 2828 G6
- Fortimo SLM C 757 1211 L19 2828 G6
- Fortimo SLM C 827 1211 L19 2828 G6
- Fortimo SLM C 830 1211 L19 2828 G6
- Fortimo SLM C 835 1211 L19 2828 G6
- Fortimo SLM C 840 1211 L19 2828 G6
- Fortimo SLM C 850 1211 L19 2828 G6
- Fortimo SLM C 857 1211 L19 2828 G6
- Fortimo SLM C 927 1211 L19 2828 G6
- Fortimo SLM C 930 1211 L19 2828 G6

Parameter	Min	Typ	Max	Unit
Length	27.8	28	28.2	mm
Width	27.8	28	28.2	mm
Height PCB	0.9	1	1.1	mm
Height including dam	1.2	1.5	1.8	mm

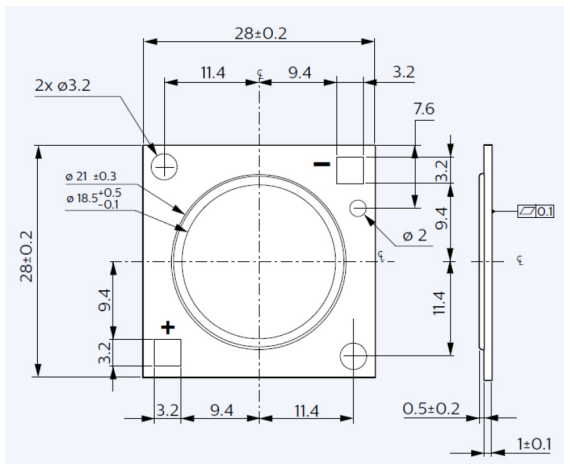

## Absolute Ratings

Parameter	Min	Typ	Max	Unit
Current Through the LED Module (I-max)			2000	mA
Case Temperature (Tc-max)			95	°C
Power at Rated Vf-max and I-max			79.2	W
ESD Human Body Model (HBM) Class 3A JESD22-A114-E 8 kV			8	kV
ESD Machine Model (MM) Class B JESD22-A115-B			400	kV
Ambient Temperature	-20		40	°C
Storage Temperature	-40		80	°C

# Fortimo SLM 1211 L19 2828 G6

## Application Information

### Environmental

RoHS/REACH

### Certificates and standards

IEC 62031:2008 (First Edition) + A1:2012 + A2:2014

EN 62031:2008 + A1:2013 + A2:2015 without differences

Relevant clauses of IEC 62471:2006 (Incl. IEC/TR 62471-2: 2009 and IEC/TR 62778: 2014)


Relevant clauses of EN 62471:2008 (With IEC/TR 62471-2: 2009 and IEC/TR 62778: 2014)

Relevant clauses of IEC 60838-1:2004 + A1:2008 + A2:2011 with IEC 60838-2-2:2006 + A1:2012

Relevant clauses of EN 60838-1:2004 + A1:2008 + A2:2011 with EN 60838-2-2:2006 + A1:2012

Application	
IP Rating	No IP-rating
Overheating Protection	No
Luminaire Class	IEC Class I and Class II
Dimming	Yes

## Warranty Window

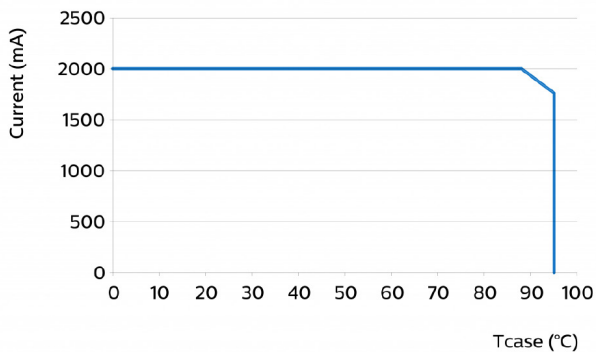

© 2016 Philips Lighting Holding B.V. All rights reserved.  
Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.  
[philips.com/ledmodulesna](http://philips.com/ledmodulesna)



Philips Lighting North America Corporation  
10275 W. Higgins Road, Rosemont IL 60018  
Tel: 800-322-2086 Fax: 888-423-1882  
Customer/Technical Service: 800-372-3331  
OEM Support: 866-915-5886

Philips Lighting Canada Ltd.  
281 Hillmount Rd, Markham, ON, Canada L6C 2S3  
Tel. 800-668-9008