

A nighttime cityscape featuring several illuminated buildings and a prominent bridge structure with a complex steel truss design. The bridge is lit with vibrant blue and purple lights. In the foreground, there are concrete structures, possibly part of a waterfront development, with some yellow lights. The sky is a deep blue, and the overall scene is a mix of modern architecture and industrial elements.

PHILIPS

Lighting Catalog

Lamp Specification
Guide

Innovation for today and tomorrow

Lamp Specification Guide 2015

Contents



LED Lamps

Page 4



Fluorescent Lamps

Page 14



Compact Fluorescent Lamps

Page 46



HID Lamps

Page 66



Halogen Lamps

Page 98



Incandescent Lamps

Page 114



Specialty Lamps

Page 134

We address people's lighting needs

Philips Lighting is a global market leader with recognized expertise in the development, manufacturing and application of innovative lighting solutions. We have pioneered many of the key breakthroughs in lighting over the past 123 years, laying the basis for our current strength and ensuring we are well-placed to be a leader in the digital transformation. We aim to further strengthen our position in the digital market through added investment in LED leadership while at the same time capitalizing on our broad portfolio, distribution and brand in conventional lighting.

We address people's lighting needs across a full range of market segments. Indoors, we offer lighting solutions for homes, retail stores, offices, schools, hotels, factories and hospitals. Outdoors, we offer solutions for roads (street lighting and Automotive lighting) and for public spaces, residential areas and sports arenas. In addition, we address the desire for light-inspired experiences through architectural projects. Finally, we offer special lighting applications in specialized areas, such as horticulture and water purification.




Contents

	LED A-Type Lamps Page 6		LED Candle Lamps Page 6		LED MR16 Lamps Page 7
---	-----------------------------------	---	-----------------------------------	---	---------------------------------

	LED PAR16 GU10 Lamps Page 7		LED PAR20 Lamps Page 7		LED PAR30 Lamps Page 8
---	---------------------------------------	---	----------------------------------	---	----------------------------------

	LED PAR38 Lamps Page 9		LED Reflector Lamps Page 10		LED T8 InstantFit Lamps Page 10
---	----------------------------------	---	---------------------------------------	---	---

	LED SlimStyle Bulbs Page 11
---	---------------------------------------





Transforming conventional light sources to LED can improve ambiance, energy efficiency and reduce maintenance.

Now with LED you can do things you couldn't do before

Philips remains on the cutting-edge with exciting, meaningful LED solutions that help to transform environments and reinforce brand identities, while reducing lighting-related energy costs and minimizing environmental impact.

Our lighting expertise As the world's largest lighting company, and a trusted lighting brand for over 124 years, we listen and respond to our customers; and focus our research investments into building meaningful LED innovations.

Inherent product quality By employing the latest advances in optics, electrical LED packages, lamp shape and heat management methods, we can produce high-quality, long-lasting LED solutions for you.

Creating value for you As a simple, convenient replacement of other lighting technologies, our LED retrofit lamps are installed quickly and without complexity so you can immediately enjoy a beautifully lit space in a sustainable manner. With Philips LED solutions, your future is brighter than ever.

Current Product	Philips Upgrade Product	Benefit	Page
 <p>60W A19 Incandescent</p>	 <p>Philips LED 9.5W A19</p>	<ul style="list-style-type: none"> • Smooth dimming to 10% of full light levels* • Up to 25,000 hours rated average life • 3-year limited warranty 	6
 <p>90W PAR38 Halogen</p>	 <p>Philips LED 13W PAR38 with Airflux Technology</p>	<ul style="list-style-type: none"> • Smooth dimming to 10% of full light levels* • 50,000 hours rated average life • Increased candela 	9
 <p>50W Halogen</p>	 <p>Philips LED 7W MR16</p>	<ul style="list-style-type: none"> • Smooth dimming to 10% of full light levels* • Improved lumens • Increased transformer compatibility 	7

* Dimmable when using leading and trailing edge dimmers. See Philips Website (www.philips.com/ledtechguide) for compatible dimmers.

LED Lamps

LED A-Type and Candle Lamps

Watts	Bulb Type	Base	Product Symbols, Number Footnotes	Ordering Code	Volts	Description	Rated Avg.			Approx. Life (Yrs.)	Energy Cost (¢/kWh)	Color Temp. (K)
							Case Qty.	Life (Hrs.)	Approx. Min. MBLCP [†] CRI (ln.)			

LED A-Type Lamps

FTC REQUIREMENTS*

5.5	A19	Med.	45405-8	■	5.5A19/LED/5000 DIM	120	A19 Dim	6	25,000	—	80	4.3	450	22.8	\$0.66	5000
6.5	A19	Med.	45331-6	■ WG	6.5A19/2200-2700 DIM 120V	120	A19 Dim with warm glow	6	25,000	—	80	4.3	450	22.8	\$0.78	2700
9	A19	Med.	45404-1	■	9A19/LED/5000 DIM	120	A19 Dim	6	25,000	—	80	4.3	800	22.8	\$1.08	5000
9.5	A19	Med.	45332-4	■ WG	9.5A19/2200-2700 DIM 120V	120	A19 Dim with warm glow	6	25,000	—	80	4.3	800	22.8	\$1.14	2700
15	A21	Med.	43218-7	■	15A21/2700-WHT DIM	120	A21 Dim	6	25,000	—	80	4.8	1145	22.8	\$1.81	2700
19	A21	Med.	43221-1	■	19A21/2700-WHT DIM	120	A21 Dim	6	25,000	—	80	4.8	1620	22.8	\$2.65	2700

LED 3-Way A-Type lamps

5/9/20	A-Type	Med.	45336-5	■	20A21/END/2700 3W 120V	A21	3-way Non-dim	6	25,000	—	80	4.95	470/ 840/ 1620	22.8	\$0.60 \$1.08 \$2.41	2700
--------	--------	------	---------	---	------------------------	-----	---------------	---	--------	---	----	------	----------------------	------	----------------------------	------

LED Clear A-Type Lamps

4.5	A-Type	Med.	45448-8		4.5A19/LED/827 DIM 120V	120	A19 Clear Dim	6	25,000	—	80	4.2	330	22.8	\$0.54	2700
-----	--------	------	---------	--	-------------------------	-----	---------------	---	--------	---	----	-----	-----	------	--------	------

LED Candle Lamps

2.5	B13	Cand.	43514-9	■	2.5B13/2700-E12 DIM	120	B13 Clear Candle Dim	8	25,000	—	80	4.4	180	22.8	\$0.30	2700
4.5	B13	Cand.	45183-1		4.5B13/2700-E12 FR	120	B13 Frosted Candle	8	25,000	—	80	4.4	330	22.8	\$0.54	2700
	B13	Cand.	43515-6	■	4.5B13/2700-E12 DIM	120	B13 Clear Candle Dim	8	25,000	—	80	4.4	330	22.8	\$0.54	2700
6.5	BA13	Cand.	43516-4	■	4.5BA13/2700-E12 DIM	120	BA13 Clear Candle Dim	8	25,000	—	80	5.2	330	22.8	\$0.54	2700
	B13	Med.	43517-2	■	4.5B13/2700-E26 DIM	120	B13 Clear Candle Dim	8	25,000	—	80	4.4	330	22.8	\$0.54	2700
	F15	Med.	43518-0	■	6.5F15/2700-E26 DIM	120	F15 Clear Candle Dim	8	25,000	—	80	4.4	530	22.8	\$0.78	2700
	B13	Med.	45281-3	■	6.5B13/2700-E26 DIM	120	B13 Clear Candle Dim	8	25,000	—	80	4.4	530	22.8	\$0.78	2700

LED Globe Lamps

4.5	G25	Med.	45449-6		4.5G25/2700-E26 DIM	120	G25 Clear Dim	8	25,000	---	80	4.6	330	22.8	\$0.54	2700
-----	-----	------	---------	--	---------------------	-----	---------------	---	--------	-----	----	-----	-----	------	--------	------

For the most current product information, go to the e-catalog on www.philips.com
LED symbols and footnotes located on page 13
Dimmable using leading and trailing edge dimmers. Please see www.philips.com/ledtechguide for more details.



LED Lamps

LED MR16, PAR16 GU10 and PAR20 Lamps

Bulb Watts	Bulb Type	Base	Product Symbols,		Volts	Description	Case Qty.	Rated Avg. Life (Hrs.)			Approx. MOL (In.)	Approx. Life (Yrs.)		Energy Cost (\$/KWh)	Color Temp. (K)		
			Number	Footnotes				Ordering Code	(501,502)	Approx. MBCP ¹		CRI	(503)			(446)	
LED MR16 Lamps																	
FTC REQUIREMENTS*																	
6.5	MR16	GU5.3	45453-8	WG		6.5MR16/F25/2700-2200 DIM 12V	12	MR16 25° Dim with warm glow	10	25,000	1750	80	1.9	410	22.8	\$0.78	2700-2200
			45454-6	WG		6.5MR16/F35/2700-2200 DIM 12V	12	MR16 35° Dim with warm glow	10	25,000	900	80	1.9	410	22.8	\$0.78	2700-2200
			45478-5			6.5MR16/F25/3000 DIM 12V	12	MR16 Flood 25° Dim	10	25,000	1250	80	1.9	460	22.8	\$0.78	3000
			45350-6			6.5MR16/F35/3000 DIM 12V	12	MR16 Flood 35° Dim	10	25,000	960	80	1.9	460	22.8	\$0.78	3000
7	MRX16	GU5.3	43265-8	■		7MRX16/S15 2700 DIM AF	12	MRX16 Spot 15° Dim	10	40,000	2650	80	2.1	380	36.5	\$0.84	2700
			43266-6	■		7MRX16/S15 3000 DIM AF	12	MRX16 Spot 15° Dim	10	40,000	2650	81	2.1	420	36.5	\$0.84	3000
			43267-4	■		7MRX16/S15 4000 DIM AF	12	MRX16 Spot 15° Dim	10	40,000	1750	83	2.1	440	36.5	\$0.84	4000
			43259-1	■		7MRX16/F25 2700 DIM AF	12	MRX16 Flood 25° Dim	10	40,000	1950	80	2.1	370	36.5	\$0.84	2700
			43260-9	■		7MRX16/F25 3000 DIM AF	12	MRX16 Flood 25° Dim	10	40,000	1950	80	2.1	370	36.5	\$0.84	3000
			43261-7	■		7MRX16/F25 4000 DIM AF	12	MRX16 Flood 25° Dim	10	40,000	2050	80	2.1	390	36.5	\$0.84	4000
			43262-5	■		7MRX16/F35 2700 DIM AF	12	MRX16 Flood 35° Dim	10	40,000	1050	82	2.1	420	36.5	\$0.84	2700
			43263-3	■		7MRX16/F35 3000 DIM AF	12	MRX16 Flood 35° Dim	10	40,000	1050	82	2.1	440	36.5	\$0.84	3000
			43264-1	■		7MRX16/F35 4000 DIM AF	12	MRX16 Flood 35° Dim	10	40,000	1100	82	2.1	470	36.5	\$0.84	4000
			43362-3	■		7MRX16/F25 2700 DIM AF HO	12	MRX16 Flood 25° Dim	10	40,000	2400	82	2.1	500	36.5	\$0.84	2700
			43363-1	■		7MRX16/F25 3000 DIM AF HO	12	MRX16 Flood 25° Dim	10	40,000	2500	82	2.1	510	36.5	\$0.84	3000
			43364-9	■		7MRX16/F35 2700 DIM AF HO	12	MRX16 Flood 35° Dim	10	40,000	1300	82	2.1	500	36.5	\$0.84	2700
10	MRX16	GU5.3	43239-3	■		10MRX16/F25 2700 DIM HO	12	MRX16 Flood 25° Dim	10	30,000	3120	80	2.1	640	27.4	\$1.20	2700
			43240-1	■		10MRX16/F25 3000 DIM HO	12	MRX16 Flood 25° Dim	10	30,000	3360	80	2.1	650	27.4	\$1.20	3000
			43241-9	■		10MRX16/F25 4000 DIM HO	12	MRX16 Flood 25° Dim	10	30,000	3700	80	2.1	650	27.4	\$1.20	4000
			43242-7	■		10MRX16/F35 2700 DIM HO	12	MRX16 Flood 35° Dim	10	30,000	1880	80	2.1	640	27.4	\$1.20	2700
			43243-5	■		10MRX16/F35 3000 DIM HO	12	MRX16 Flood 35° Dim	10	30,000	2030	81	2.1	650	27.4	\$1.20	3000
			43244-3	■		10MRX16/F35 4000 DIM HO	12	MRX16 Flood 35° Dim	10	30,000	2260	83	2.1	650	27.4	\$1.20	4000

LED PAR16 GU10 Lamps																	
4.5	PAR16	GU10	45440-5	□		4.5GU10/LED/830/F25 DIM 120V	120	PAR16 GU10 Flood 25° Dim	10	25,000	1150	80	2.3	315	22.8	\$0.54	3000

LED PAR20 Lamps																				
6	PAR20	Med.	45604-6	□ ◊		6PAR20/F25 2700 DIM	120	PAR20 Flood 25° Dim	6	45,000	1800	80	3.2	430	41.1	\$0.72	2700			
			45610-3	□ ◊		6PAR20/F25 2700 DIM B	120	PAR20 Flood 25° Dim Black	6	45,000	1800	80	3.2	430	41.1	\$0.72	2700			
			45605-3	□ ◊		6PAR20/F25 3000 DIM	120	PAR20 Flood 25° Dim	6	45,000	1900	80	3.2	450	41.1	\$0.72	3000			
			45611-1	□ ◊		6PAR20/F25 3000 DIM B	120	PAR20 Flood 25° Dim Black	6	45,000	1900	80	3.2	450	41.1	\$0.72	3000			
			45606-1	□ ◊		6PAR20/F25 4000 DIM	120	PAR20 Flood 25° Dim	6	45,000	2000	80	3.2	470	41.1	\$0.72	4000			
			45607-9	□ ◊		6PAR20/F35 2700 DIM	120	PAR20 Flood 35° Dim	6	45,000	900	80	3.2	430	41.1	\$0.72	2700			
			45608-7	□ ◊		6PAR20/F35 3000 DIM	120	PAR20 Flood 35° Dim	6	45,000	940	80	3.2	450	41.1	\$0.72	3000			
			45609-5	□ ◊		6PAR20/F35 4000 DIM	120	PAR20 Flood 35° Dim	6	45,000	980	80	3.2	470	41.1	\$0.72	4000			
			8	PAR20	Med.	42612-2	■		8PAR20/F25 2700 DIM	120	PAR20 Flood 25° Dim	6	45,000	2300	84	3.5	450	41.1	\$0.84	2700
						45341-5	■		8PAR20/F25 2700 DIM B	120	PAR20 Flood 25° Dim Black	6	45,000	2300	84	3.5	450	41.1	\$0.84	2700
42613-0	■					8PAR20/F25 3000 DIM	120	PAR20 Flood 25° Dim	6	45,000	2400	84	3.5	470	41.1	\$0.84	3000			
45342-3	■					8PAR20/F25 3000 DIM B	120	PAR20 Flood 25° Dim Black	6	45,000	2400	84	3.5	470	41.1	\$0.84	3000			
42614-8	■					8PAR20/F25 4000 DIM	120	PAR20 Flood 25° Dim	6	45,000	2400	84	3.5	470	41.1	\$0.84	4000			
42615-5	■					8PAR20/F35 2700 DIM	120	PAR20 Flood 35° Dim	6	45,000	1100	84	3.5	450	41.1	\$0.84	2700			
42616-3	■					8PAR20/F35 3000 DIM	120	PAR20 Flood 35° Dim	6	45,000	1100	84	3.5	470	41.1	\$0.84	3000			
42617-1	■					8PAR20/F35 4000 DIM	120	PAR20 Flood 35° Dim	6	45,000	1100	84	3.5	470	41.1	\$0.84	4000			

For the most current product information, go to the e-catalog on www.philips.com
 LED symbols and footnotes located on page 13
 Dimmable using leading and trailing edge dimmers. Please see www.philips.com/ledtechguide for more details.



LED Lamps

LED PAR30S and PAR30L Lamps

Bulb Watts	Type	Base	Product Symbols, Number Footnotes	Ordering Code	Volts	Description	Rated Avg.			Approx. MBCP ¹	CRI	MOL (In.)	Approx. Life		Energy Cost	Color Temp.
							Case Qty.	(501,502)	(Hrs.)				(503)	(446)		
LED Single Optic PAR30S Lamps (Gen1)																
12	PAR30S	Med.	43236-9	■	I2PAR30S/S15 2700 ND AF SO	120	PAR30S Flood 15°	6	50,000	7400	83	3.5	850	45.7	\$1.45	2700
			43237-7	■	I2PAR30S/S15 3000 ND AF SO	120	PAR30S Flood 15°	6	50,000	7900	83	3.5	850	45.7	\$1.45	3000
			43238-5	■	I2PAR30S/S15 4000 ND AF SO	120	PAR30S Flood 15°	6	50,000	8500	83	3.5	900	45.7	\$1.45	4000
			42692-4	■	I2PAR30S/F25 2700 AF SO	120	PAR30S Flood 25°	6	50,000	5000	83	3.5	850	45.7	\$1.45	2700
			43296-2	■	I2PAR30S/F25 2700 AF SO-B	120	PAR30S Flood 25° Black	6	50,000	5000	83	3.5	850	45.7	\$1.45	2700
			42693-2	■	I2PAR30S/F25 3000 AF SO	120	PAR30S, Flood 25°	6	50,000	5300	83	3.5	900	45.7	\$1.45	3000
			43297-0	■	I2PAR30S/F25 3000 AF SO-B	120	PAR30S Flood 25° Black	6	50,000	5300	83	3.5	900	45.7	\$1.45	3000
			43137-9	■	I2PAR30S/F25 3500 AF SO	120	PAR30S Flood 25°	6	50,000	5300	84	3.5	950	45.7	\$1.45	3500
			42694-0	■	I2PAR30S/F25 4000 AF SO	120	PAR30S Flood 25°	6	50,000	5500	83	3.5	950	45.7	\$1.45	4000
			42695-6	■	I2PAR30S/F35 2700 AF SO	120	PAR30S Flood 35°	6	50,000	1850	83	3.5	850	45.7	\$1.45	2700
			42696-4	■	I2PAR30S/F35 3000 AF SO	120	PAR30S Flood 35°	6	50,000	1960	83	3.5	900	45.7	\$1.45	3000
			43138-7	■	I2PAR30S/F35 3500 AF SO	120	PAR30S Flood 35°	6	50,000	2000	84	3.5	950	45.7	\$1.45	3500
			42697-2	■	I2PAR30S/F35 4000 AF SO	120	PAR30S Flood 35°	6	50,000	2100	83	3.5	950	45.7	\$1.45	4000

FTC REQUIREMENTS*

LED Single Optic PAR30S Lamps (Gen2)

12.5	PAR30S	Med.	43526-3	■	I25PAR30S/S15 2700 DIM AF SO	120	PAR30S Spot 15° Dim	6	50,000	7400	81	3.5	850	45.7	\$1.51	3000
			43527-1	■	I25PAR30S/S15 3000 DIM AF SO	120	PAR30S Spot 15° Dim	6	50,000	7900	81	3.5	900	45.7	\$1.51	3000
			43529-7	■	I25PAR30S/F25 2700 DIM AF SO	120	PAR30S Flood 25° Dim	6	50,000	5000	81	3.5	850	45.7	\$1.51	2700
			43530-5	■	I25PAR30S/F25 3000 DIM AF SO	120	PAR30S Flood 25° Dim	6	50,000	5300	81	3.5	900	45.7	\$1.51	3000
			43531-3	■	I25PAR30S/F25 4000 DIM AF SO	120	PAR30S Flood 25° Dim	6	50,000	5500	81	3.5	950	45.7	\$1.51	4000
			43532-1	■	I25PAR30S/F35 2700 DIM AF SO	120	PAR30S Flood 35° Dim	6	50,000	2400	81	3.5	850	45.7	\$1.51	3000
			43533-9	■	I25PAR30S/F35 3000 DIM AF SO	120	PAR30S Flood 35° Dim	6	50,000	2500	81	3.5	900	45.7	\$1.51	3000
			43534-7	■	I25PAR30S/F35 4000 DIM AF SO	120	PAR30S Flood 35° Dim	6	50,000	2700	81	3.5	950	45.7	\$1.51	3000

LED PAR30S Crisp White Lamps

12.5	PAR30S	Med.	43492-8	■ ▲ □	I25PAR30S/S15/CW 3000 AF SO	120	PAR30S Spot 15° Crisp White	6	50,000	6300	92	3.5	780	45.7	\$1.51	3000
			43493-6	■ ▲ □	I25PAR30S/S15/CW 3000 AF SO-B	120	PAR30S Spot 15° Crisp White Black	6	50,000	6300	92	3.5	780	45.7	\$1.51	3000
			43494-4	■ ▲ □	I25PAR30S/F25/CW 3000 AF SO	120	PAR30S Flood 25° Crisp White	6	50,000	3500	92	3.5	780	45.7	\$1.51	3000

LED Single Optic PAR30L Lamps (Gen1)

12	PAR30L	Med.	43012-4	■	I2PAR30L/F25 2700 DIM AF RO	120	PAR30L Flood 25° Dim	6	50,000	5000	80	4.4	850	45.7	\$1.45	2700
			43013-2	■	I2PAR30L/F25 3000 DIM AF RO	120	PAR30L Flood 25° Dim	6	50,000	5300	80	4.4	900	45.7	\$1.45	3000
			43014-0	■	I2PAR30L/F25 4000 DIM AF RO	120	PAR30L Flood 25° Dim	6	50,000	5500	80	4.4	950	45.7	\$1.45	4000
			43015-7	■	I2PAR30L/F35 2700 DIM AF SO	120	PAR30L Flood 35° Dim	6	50,000	1850	80	4.4	850	45.7	\$1.45	2700
			43016-5	■	I2PAR30L/F35 3000 DIM AF SO	120	PAR30L Flood 35° Dim	6	50,000	1960	80	4.4	900	45.7	\$1.45	3000
			43017-3	■	I2PAR30L/F35 4000 DIM AF SO	120	PAR30L Flood 35° Dim	6	50,000	2100	80	4.4	950	45.7	\$1.45	4000

For the most current product information, go to the e-catalog on www.philips.com

LED symbols and footnotes located on page 13

Dimmable using leading and trailing edge dimmers. Please see www.philips.com/ledtechguide for more details.



12W PAR30S
Single Optic Med.



12.5W PAR30S
Single Optic Med.



12.5W PAR30S
Single Optic Med.



12W PAR30L
Single Optic Med.



12.5W PAR30L
Single Optic Med.



LED Lamps

LED PAR38 Lamps

Bulb Watts	Type	Base	Product Symbols, Number	Footnotes	Ordering Code	Volts	Description	Rated Case Qty.	Avg. Life (Hrs.) (501,502)	Approx. MBCP ¹	CRI (In.)	Approx. Life Lumens (Yrs.) (503)	Energy Cost (445)	Color Temp. (K)
------------	------	------	-------------------------	-----------	---------------	-------	-------------	-----------------	----------------------------	---------------------------	-----------	----------------------------------	-------------------	-----------------

LED Single Optic PAR30L Lamps (Gen2)

FTC REQUIREMENTS*

12.5	PAR30L Med.	45466-0	■ ◊	12.5PAR30L/F25 2700 DIM SO	120	PAR30L Flood 25° Dim	6	50,000	5000	80	4.4	850	45.7	\$1.51	2700
		45467-8	■ ◊	12.5PAR30L/F25 3000 DIM SO	120	PAR30L Flood 25° Dim	6	50,000	5300	80	4.4	900	45.7	\$1.51	3000
		45468-6	■ ◊	12.5PAR30L/F25 4000 DIM SO	120	PAR30L Flood 25° Dim	6	50,000	5500	80	4.4	950	45.7	\$1.51	4000
		45469-4	■ ◊	12.5PAR30L/F35 2700 DIM SO	120	PAR30L Flood 35° Dim	6	50,000	2400	80	4.4	850	45.7	\$1.51	2700
		45470-2	■ ◊	12.5PAR30L/F35 3000 DIM SO	120	PAR30L Flood 35° Dim	6	50,000	2600	80	4.4	900	45.7	\$1.51	3000
		45471-0	■ ◊	12.5PAR30L/F35 4000 DIM SO	120	PAR30L Flood 35° Dim	6	50,000	2750	80	4.4	950	45.7	\$1.51	4000

LED PAR38 Lamps

14	PAR38 Med.	43495-0	■ ▲ ◻	14PAR38/S15/CW 3000 AF SO	120	Spot 15° Dim Crisp White	6	50,000	9200	92	3.5	900	41.1	\$1.68	3000
		43496-8	■ ▲ ◻	14PAR38/F25/CW 3000 AF SO	120	Flood 25° Dim Crisp White	6	50,000	4200	92	3.5	900	41.1	\$1.68	3000

LED Single Optic PAR38 Lamps

13	PAR38 Med.	43003-3		13PAR38/S15 2700 DIM AF RO 6/I	120	PAR38 Spot 15° Dim	6	25,000	8500	80	5.2	900	22.8	\$1.57	2700
		43004-1		13PAR38/S15 3000 DIM AF RO 6/I	120	PAR38 Spot 15° Dim	6	25,000	9000	80	5.2	950	22.8	\$1.57	3000
		43005-8		13PAR38/S15 4000 DIM AF RO 6/I	120	PAR38 Spot 15° Dim	6	25,000	9000	80	5.2	1000	22.8	\$1.57	4000
		43006-6	■ WSL	13PAR38/F25 2700 DIM AF RO 6/I	120	PAR38 Flood 25° Dim	6	25,000	5300	80	5.2	900	22.8	\$1.57	2700
		43007-4	■ WSL	13PAR38/F25 3000 DIM AF RO 6/I	120	PAR38 Flood 25° Dim	6	25,000	5500	80	5.2	945	22.8	\$1.57	3000
		43008-2	■	13PAR38/F25 4000 DIM AF RO 6/I	120	PAR38 Flood 25° Dim	6	25,000	5500	81	5.2	980	22.8	\$1.57	4000
		43009-0	■ WSL	13PAR38/F35 2700 DIM AF SO 6/I	120	PAR38 Flood 35° Dim	6	50,000	1980	80	5.2	900	45.7	\$1.57	2700
		43010-8	■ WSL	13PAR38/F35 3000 DIM AF SO 6/I	120	PAR38 Flood 35° Dim	6	50,000	2100	80	5.2	950	45.7	\$1.57	3000
		43011-6	■	13PAR38/F36 4000 DIM AF RO 6/I	120	PAR38 Flood 36° Dim	6	25,000	2100	82	5.2	980	22.8	\$1.57	4000
		19	PAR38 Med.	43000-9	■ WSL	19PAR38/S15 2700 DIM AF RO 6/I	120	PAR38 Spot 15° Dim	6	25,000	10,000	80	5.2	1200	22.8
43001-7				19PAR38/S15 3000 DIM AF RO 6/I	120	PAR38 Spot 15° Dim	6	25,000	11,000	80	5.2	1250	22.8	\$2.29	3000
43002-5				19PAR38/S15 4000 DIM AF RO 6/I	120	PAR38 Spot 15° Dim	6	25,000	11,000	80	5.2	1300	22.8	\$2.29	4000
42908-4	■ WSL			19PAR38/F25 2700 DIM AF RO 6/I	120	PAR38 Flood 25° Dim	6	25,000	6800	80	5.2	1180	22.8	\$2.29	2700
43298-8	■ WSL			19PAR38/F25 2700 DIM AF SO-B	120	PAR38 Flood 25° Dim	6	25,000	6000	80	5.2	1190	22.8	\$2.29	2700
42909-2	■			19PAR38/F25 3000 DIM AF RO 6/I	120	PAR38 Flood 25° Dim	6	25,000	7100	80	5.2	1250	22.8	\$2.29	3000
43299-6	■			19PAR38/F25 3000 DIM AF SO-B	120	PAR38 Flood 25° Dim	6	25,000	6500	80	5.2	1250	22.8	\$2.29	3000
43201-3	■			19PAR38/F25 3000 DIM AF SO-S	120	PAR38 Flood 25° Dim	6	25,000	6500	80	5.2	1250	22.8	\$2.29	3000
42910-0	■			19PAR38/F25 4000 DIM AF RO 6/I	120	PAR38 Flood 25° Dim	6	25,000	7500	80	5.2	1300	22.8	\$2.29	4000
42911-8	■			19PAR38/F35 2700 DIM AF RO 6/I	120	PAR38 Flood 35° Dim	6	25,000	3200	80	5.2	1170	22.8	\$2.29	2700
42912-6	■			19PAR38/F35 3000 DIM AF RO 6/I	120	PAR38 Flood 35° Dim	6	25,000	3400	80	5.2	1190	22.8	\$2.29	3000
42913-4	■			19PAR38/F35 4000 DIM AF RO 6/I	120	PAR38 Flood 35° Dim	6	25,000	3600	80	5.2	1300	22.8	\$2.29	4000
43139-5	■			19PAR38/F25 3500 DIM AF SO	120	PAR38 Flood 25° Dim	6	50,000	7500	85	5.2	1300	45.7	\$2.29	3500
43140-3	■	19PAR38/F36 3500 DIM AF SO	120	PAR38 Flood 36° Dim	6	50,000	7500	85	5.2	1300	45.7	\$2.29	3500		

LED Single Optic PAR38 Lamps (Gen2)

13	PAR38 Med.	45472-8	■ ∞	13PAR38/F25 2700 DIM SO	120	PAR38 Flood 25° Dim	6	50,000	5300	80	5.2	900	45.7	\$1.57	2700
		45473-6	■ ∞	13PAR38/F25 3000 DIM SO	120	PAR38 Flood 25° Dim	6	50,000	5500	80	5.2	950	45.7	\$1.57	3000
		45474-4	■ ∞	13PAR38/F35 2700 DIM SO	120	PAR38 Flood 35° Dim	6	50,000	2600	80	5.2	900	45.7	\$1.57	2700
		45475-1	■ ∞	13PAR38/F35 3000 DIM SO	120	PAR38 Flood 35° Dim	6	50,000	2750	80	5.2	950	45.7	\$1.57	3000
17	PAR38 Med.	43535-4	■	17PAR38/S15 2700 DIM AF SO	120	PAR38 Spot 15° Dim	6	50,000	10,000	80	5.2	1200	45.7	\$2.05	2700
		43536-2	■	17PAR38/S15 3000 DIM AF SO	120	PAR38 Spot 15° Dim	6	50,000	10,500	80	5.2	1200	45.7	\$2.05	3000
		43537-0	■	17PAR38/S15 4000 DIM AF SO	120	PAR38 Spot 15° Dim	6	50,000	11,000	80	5.2	1300	45.7	\$2.05	4000
		43538-8	■	17PAR38/F25 2700 DIM AF SO	120	PAR38 Flood 25° Dim	6	50,000	6800	80	5.2	1200	45.7	\$2.05	2700
		43539-6	■	17PAR38/F25 3000 DIM AF SO	120	PAR38 Flood 25° Dim	6	50,000	7100	80	5.2	1200	45.7	\$2.05	3000
		43540-4	■	17PAR38/F25 4000 DIM AF SO	120	PAR38 Flood 25° Dim	6	50,000	7500	80	5.2	1300	45.7	\$2.05	4000
		43541-2	■	17PAR38/F35 2700 DIM AF SO	120	PAR38 Flood 35° Dim	6	50,000	3200	80	5.2	1200	45.7	\$2.05	2700
		43542-0	■	17PAR38/F35 3000 DIM AF SO	120	PAR38 Flood 35° Dim	6	50,000	3400	80	5.2	1200	45.7	\$2.05	3000
		43543-8	■	17PAR38/F35 4000 DIM AF SO	120	PAR38 Flood 35° Dim	6	50,000	3600	80	5.2	1300	45.7	\$2.05	4000

For the most current product information, go to the e-catalog on www.philips.com

LED symbols and footnotes located on page 13

Dimmable using leading and trailing edge dimmers. Please see www.philips.com/ledtechguide for more details.



Single Optic PAR38 Med.



Single Optic PAR38 Med. (Gen2)



Single Optic PAR38 Med.



LED Lamps

LED PAR38, R20, BR30, BR40 and T8 Lamps

Bulb Watts	Type	Base	Product Symbols, Number Footnotes	Ordering Code	Volts	Description	Case Qty.	Rated Avg. Life (Hrs.) (501,502)	Approx. MBCP ¹	Approx. CRI	MOL (In.) (503)	Approx. Life (Yrs.) (446)	Energy Cost (445)	Color Temp. (K)
------------	------	------	-----------------------------------	---------------	-------	-------------	-----------	----------------------------------	---------------------------	-------------	-----------------	---------------------------	-------------------	-----------------

LED Outdoor PAR38 Lamps

FTC REQUIREMENTS*

15	PAR38	Med.	45343-1	15PAR38/F25 3000 ULW DIM 6/I	120	Flood 25° Dim 3000K	6	25,000	4400	80	5.2	1300	22.8	\$2.29	3000
----	-------	------	---------	------------------------------	-----	---------------------	---	--------	------	----	-----	------	------	--------	------

LED Reflector Lamps

8	R20	Med.	42881-3	8R20/END/F25 2700 DIM 6/I	120	R20 Wide Flood 2700K Dim	6	45,000	—	80	3.5	530	41.1	\$0.96	2700
9.5	BR30	Med.	45224-3	9.5BR30/2200-2700 DIM 120V	120	Warm glow effect BR30 Wide Flood Dim	6	25,000	—	83	5.1	730	22.8	\$1.57	2200-2700
12	BR40	Med.	43194-0	12BR40/F90 2700 DIM AF	120	BR40 Wide Flood Dim	6	25,000	—	80	6.5	800	22.8	\$1.45	2700

LED T8 InstantFit T8 – 2' Lamps

8.5	T8	G13	45201-1	NSF	8.5T8/24-3000 IF 10/I	100-277, 347	T8 InstantFit 2ft HO 3000K	10	50,000	—	82	24.0	950	45.7	\$1.02	3000
			45202-9	● NSF	8.5T8/24-3500 IF 10/I	100-277, 347	T8 InstantFit 2ft HO 3500K	10	50,000	—	82	24.0	1000	45.7	\$1.02	3500
			45203-7	● NSF	8.5T8/24-4000 IF 10/I	100-277, 347	T8 InstantFit 2ft HO 4000K	10	50,000	—	82	24.0	1050	45.7	\$1.02	4000
			45204-5	● NSF	8.5T8/24-5000 IF 10/I	100-277, 347	T8 InstantFit 2ft HO 5000K	10	50,000	—	82	24.0	1100	45.7	\$1.02	5000

LED T8 InstantFit T8 – 3' Lamps

10.5	T8	G13	45205-2	○ NSF	10.5T8/36-3000 IF 10/I	100-277, 347	T8 InstantFit 3ft HO 3000K	10	50,000	—	82	36.0	1100	45.7	\$1.26	3000
			45206-0	○ NSF	10.5T8/36-3500 IF 10/I	100-277, 347	T8 InstantFit 3ft HO 3500K	10	50,000	—	82	36.0	1160	45.7	\$1.26	3500
			45207-8	○ NSF	10.5T8/36-4000 IF 10/I	100-277, 347	T8 InstantFit 3ft HO 4000K	10	50,000	—	82	36.0	1200	45.7	\$1.26	4000
			45208-6	○ NSF	10.5T8/36-5000 IF 10/I	100-277, 347	T8 InstantFit 3ft HO 5000K	10	50,000	—	82	36.0	1270	45.7	\$1.26	5000

LED T8 InstantFit T8 – 4' High Output Lamps

16.5	T8	G13	43486-0	● NSF	16.5T8/48-3000 IF 10/I	100-277, 347	T8 InstantFit 4ft HO 3000K	10	50,000	—	82	48.0	2000	45.7	\$1.99	3000
			43487-8	● NSF	16.5T8/48-3500 IF 10/I	100-277, 347	T8 InstantFit 4ft HO 3500K	10	50,000	—	82	48.0	2000	45.7	\$1.99	3500
			43488-6	● NSF	16.5T8/48-4000 IF 10/I	100-277, 347	T8 InstantFit 4ft HO 4000K	10	50,000	—	82	48.0	2100	45.7	\$1.99	4000
			43489-4	● NSF	16.5T8/48-5000 IF 10/I	100-277, 347	T8 InstantFit 4ft HO 5000K	10	50,000	—	82	48.0	2150	45.7	\$1.99	5000

LED T8 InstantFit T8 – 4' Lamps

12	T8	G13	45358-9	NSF	12T8/48-3000 IF 10/I	100-277, 347	T8 InstantFit 4ft 3000K	10	50,000	—	82	48.0	1600	45.7	\$1.45	3000
			45359-7	● NSF	12T8/48-3500 IF 10/I	100-277, 347	T8 InstantFit 4ft 3500K	10	50,000	—	82	48.0	1600	45.7	\$1.45	3500
			45360-5	● NSF	12T8/48-4000 IF 10/I	100-277, 347	T8 InstantFit 4ft 4000K	10	50,000	—	82	48.0	1600	45.7	\$1.45	4000
			45361-3	● NSF	12T8/48-5000 IF 10/I	100-277, 347	T8 InstantFit 4ft 5000K	10	50,000	—	82	48.0	1600	45.7	\$1.45	5000

LED T8 InstantFit T8 U-Bent- 6" High Output Lamps

16.5	T8	G13	45266-4	○ NSF	16.5T8/24-3000 IF-6U 10/I	100-277, 347	T8 U-Bent 6in. HO 3000K	10	50,000	—	82	24.0	2000	45.7	\$1.99	3000
			45267-2	○ NSF	16.5T8/24-3500 IF-6U 10/I	100-277, 347	T8 U-Bent 6in. HO 3500K	10	50,000	—	82	24.0	2000	45.7	\$1.99	3500
			45268-0	○ NSF	16.5T8/24-4000 IF-6U 10/I	100-277, 347	T8 U-Bent 6in. HO 4000K	10	50,000	—	82	24.0	2100	45.7	\$1.99	4000
			45269-8	○ NSF	16.5T8/24-5000 IF-6U 10/I	100-277, 347	T8 U-Bent 6in. HO 5000K	10	50,000	—	82	24.0	2150	45.7	\$1.99	5000

For the most current product information, go to the e-catalog on www.philips.com

LED symbols and footnotes located on page 13

Dimmable using leading and trailing edge dimmers. Please see www.philips.com/ledtechguide for more details.



LED Lamps

LED PL-L, T8, SlimStyle and BR30 Dimmable Lamps

Bulb Watts	Type	Base	Product Symbols, Number Footnotes	Ordering Code	Volts	Description	Rated Avg. Case Life (Hrs.)		Approx. MBCP ¹	CRI	MOL (In.)	Approx. Life Lumens (Yrs.)		Energy Cost (445)	Color Temp. (K)
							Qty. (501,502)					(503)	(446)		

LED PL-L InstantFit Lamps

													FTC REQUIREMENTS*			
16.5	PL-L	2G11	45663-2	∅	16.5PL-LED/24-3000 IF 10/I	100-277, 347	PL-L InstantFit 3000K	10	40,000	—	82	24	1900	36.5	\$1.99	3000
			45664-0	∅	16.5PL-LED/24-3500 IF 10/I	100-277, 347	PL-L InstantFit 3500K	10	40,000	—	82	24	2000	36.5	\$1.99	3500
			45665-7	∅	16.5PL-LED/24-4000 IF 10/I	100-277, 347	PL-L InstantFit 4000K	10	40,000	—	82	24	2100	36.5	\$1.99	4000

LED IS/PS/Dim T8 InstantFit Lamps

15	T8	G13	45689-7	ISPS, ∅	15T8/48-3000 IF 10/I	100-277, 347	T8 InstantFit 4ft Dim 3000K	10	50,000	—	82	48	2000	45.7	\$1.81	3000
			45690-5	ISPS, ∅	15T8/48-3500 IF 10/I	100-277, 347	T8 InstantFit 4ft Dim 3500K	10	50,000	—	82	48	2000	45.7	\$1.81	3500
			45691-3	ISPS, ∅	15T8/48-4000 IF 10/I	100-277, 347	T8 InstantFit 4ft Dim 4000K	10	50,000	—	82	48	2100	45.7	\$1.81	4000
			45692-1	ISPS, ∅	15T8/48-5000 IF 10/I	100-277, 347	T8 InstantFit 4ft Dim 5000K	10	50,000	—	82	48	2100	45.7	\$1.81	5000

LED SlimStyle A-Shape Bulb

8	A-Type	Med.	43367-2	■	8A19/SLIM/2700 DIM	120	A19 SlimStyle Dim	6	25,000	—	80	4.2	450	22.8	\$0.96	2700
10.5	A-Type	Med.	43327-6	■	10.5A19/SLIM/2700 DIM	120	A19 SlimStyle Dim	6	25,000	—	80	4.2	800	22.8	\$1.26	2700

LED 90 CRI SlimStyle A-Type Lamps

10.5	BR30	Med.	45546-9	□▲	BC10.5A19/SLIM/927 DIM 120V	120	A19 SlimStyle 90 CRI Dim	4	25,000	—	90	4.2	800	22.8	\$1.26	2700
------	------	------	---------	----	-----------------------------	-----	--------------------------	---	--------	---	----	-----	-----	------	--------	------

LED SlimStyle BR30 Dimmable Reflector Lamps

9.5	BR30	Med.	45236-7	■	9.5BR30/SLIM/F90 2700 AF	120	BR30 SlimStyle Dim	6	25,000	—	80	5.1	650	22.8	\$1.14	2700
-----	------	------	---------	---	--------------------------	-----	--------------------	---	--------	---	----	-----	-----	------	--------	------

LED 90 CRI SlimStyle BR30 Dimmable Reflector Lamps

9.5	BR30	Med.	45544-4	□▲	BC9.5BR30/SLIM/927 DIM 120V	120	BR30 SlimStyle 90 CRI Dim	4	25,000	—	90	5.1	650	22.8	\$1.14	2700
-----	------	------	---------	----	-----------------------------	-----	---------------------------	---	--------	---	----	-----	-----	------	--------	------

For the most current product information, go to the e-catalog on www.philips.com
LED symbols and footnotes located on page 13
Dimmable using leading and trailing edge dimmers. Please see www.philips.com/ledtechguide for more details.



PL-L
2G11

T8
G13



SlimStyle A-Type
Med.



SlimStyle BR30
Med.



LED Lamps

LED Base Types and Bulb Shapes

LED Base Types (Not Actual Sizes)



Med.
Medium



Cand.
Candelabra



GU10



GU5.3



G13



2G11

LED Bulb Shapes (Not Actual Sizes)



A19



A21



BA13



B13



B13



F15




GU10




MR16



MRX16




BR30




Airflux
BR40




8W Airflux
PAR20




Single Optic
PAR30S



Single Optic
PAR30L



Single Optic
PAR38




T8
InstantFit



PL-L
2G11



SlimStyle
A-Type



SlimStyle
BR30





For the most current product information, go to the e-catalog on www.philips.com

- Maximum Beam Candlepower
- Exclusive to Philips Lighting North America Corporation
- ENERGY STAR Bulb: As an ENERGY STAR Partner, Philips has determined that this product meets the ENERGY STAR guidelines for energy efficiency.
- In testing for Energy Star certification
- ▲ 90 CRI enables superior color rendition.
- Suitable for wet locations.
- ¥ For more information about FTC requirements please see rule 16 CFR part 305 @ www.ftc/os/2000/02/16cfr305.
- WG Warm glow lighting effect
- ∞ Available in June.
- ◇ Available in July.
- Design Lights Consortium qualified
- No Design Lights Consortium category
- ISPS Works with Instant Start and Program Start Ballasts
- NSF National Sanitary Foundation listed

(445) Estimated energy cost is based on 3 hrs/day, 1 l/ kWh. Cost depends on rates and use.

(446) Life in years is based on 3 hrs/day.

(501) LED Lifetime means the length of time it takes before the light output decreases to 70% of its initial lumen output.

(502) Lifetime testing consistent with IES LM-80, Lumen Maintenance Procedure.

(503) Based on photometric testing consistent with IES LM-79

(504) Photometric testing consistent with IES LM-79.

(505) Maximum power consumed at start-up. Steady state power consumption will be less.


















(506) Minimum Lumen Maintenance is the minimum number of hours after which the LED light output depreciates to 70% of its initial output. This value, L_{70} , is tested @ 25°C ambient temperature. (IES LM-80)

(507) The LED Fixture, Initial Lumens is determined as prescribed in IESNA LM-79, Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products, which specifies lumen measurements of the fixture be reported after the measurements have stabilized at 25°C.

(508) Photometric testing consistent with IES LM-79. Maximum Beam Candlepower.



Contents

 Page 18	T5 High Output Lamps Page 17	 Page 17	Energy Advantage T5 Lamps Page 17	 Page 19	Circular T5 Lamps Page 19
 Page 19	Preheat T5 Lamps Page 19	 Page 21	Twice the Life T8 Lamps Page 21	 Page 23	Energy Advantage T8 Lamps Page 23
 Page 25	Advantage T8 Lamps Page 25	 Page 26	PLUS T8 Lamps Page 26	 Page 27	700 & 800 Series T8 Lamps Page 27
 Page 29	U-Bent T8 Lamps Page 29	 Page 30	Rapid Start and Preheat T8 Lamps Page 30	 Page 31	Slimline T8 Lamps Page 31
 Page 32	High Output T8 Lamps Page 32	 Page 32	T12 Lamps Page 32	 Page 34	Gold, Appliance and Circline Lamps Page 34
 Page 35	TuffGuard Lamps Page 35	 Page 37	Consumer Lamps Page 37		



ALTO lamp technology with green endcaps has become synonymous with environmental responsibility and low mercury.







Reduce your energy and maintenance costs

The Philips Linear Fluorescent lamp portfolio offers some of the lowest mercury and longest life lamps in the industry.

Philips Energy Advantage T8 25W featuring ALTO II Technology offers high energy savings in an environmentally responsible lamp. Save 7 watts per lamp instantly when compared to a T8 32W lamp.

Philips Twice the Life Energy Advantage T8 2XL 25W featuring ALTO II Technology will last 125% longer than an industry standard 4' T8 32W lamp* (12hrs per start on an instant start ballast), and provide a cost saving solution that is better for the environment.

Philips Energy Advantage T5 HO 49W featuring ALTO Lamp Technology is the only energy saving T5 lamp that saves you 5W by just changing a lamp (compared to a T5 54W lamp) with no sacrifice to performance.

Current Product	Philips Upgrade Product	Benefit	Page
 32W 4ft T8	 Energy Advantage T8 4ft 25W featuring ALTO II Technology	<ul style="list-style-type: none"> • Saves 7W per lamp • 97% lumen maintenance • Up to 38,000 hours rated average life†; 42 month lamp warranty period** 	23
 32W 4ft T8	 Energy Advantage T8 2XL 4ft 25W featuring ALTO II Technology	<ul style="list-style-type: none"> • Saves 7W per lamp • 96% lumen maintenance • Up to 68,000 hours rated average life†; 60 month lamp warranty period** 	21
 54W 4ft T5 HO	 Energy Advantage T5 HO 44W featuring ALTO Lamp Technology	<ul style="list-style-type: none"> • Saves 10W per lamp • 40,000 hours rated average life for an extended relamping cycle† 	17

† Average life under engineering data with lamps turned off and restarted once every 12 operating hours.

* When replacing a standard 4' T8 32W lamp with 30,000 hours rated average life and 2850 lumens with a Philips Twice the Life Energy Advantage T8 32W with 68,000 hours rated average life and 2400 lumens.

Rated average life based on 12 hours per start on an instant start ballast.

**Limitations and restrictions apply, go to www.philips.com/warranties for more information

Philips T5 Fluorescent Lamps featuring ALTO Technology

Powerful, environmentally-responsible, ultra-slim lamps



- ✓ Industry low 1.4mg of mercury in most Philips T5 and T5HO lamps
- ✓ No burn in required before dimming Philips T5 and T5HO lamps
- ✓ Operate on programmed start ballast only to maintain warranty
- ✓ Lumen output ratings at 35°C, lumens at 25°C, average 10% lower

T5 High Efficiency

- 25W Energy Advantage version of 28W
- Up to 116 lumens per watt
- 5000 kelvin being added to all sizes
- Slim profile lamp and ballast
- Perfect for office, healthcare and government applications

T5 High Output


- 44W and 49W HO Energy Advantage version of 54W HO
- 49W HO also available in extreme temperature version
- T5HO offers superb high bay options
- Increased energy saving options for many applications
- Perfect for retail, industrial and warehouse applications
- New Extra Long Life T5HO lamps for extended relamp cycles

Philips T5 Lamp Warranty Periods

Philips Lamp	Warranty period*	
	3 Hr. Start	12 Hr. Start
T5HE – 14W, 21W, 28W & 35W	30 Months	36 Months
T5HE – Energy Advantage F28T5/800/EA/ALTO 25W	36 Months	42 Months
T5HO – 24W, 39W & 54W	30 Months	36 Months
T5HO – Energy Advantage F54T5/800/HO/EA/ALTO 49W	36 Months	42 Months
T5HO – Extra Energy Advantage F54T5/800/HO/EA/ALTO 44W	42 Months	48 Months
T5HO - Extra Long Life	48 Months	72 Months

* Certain limitations and conditions apply. See Philips for further warranty details.

T5/T8 Lumens vs. Temperature

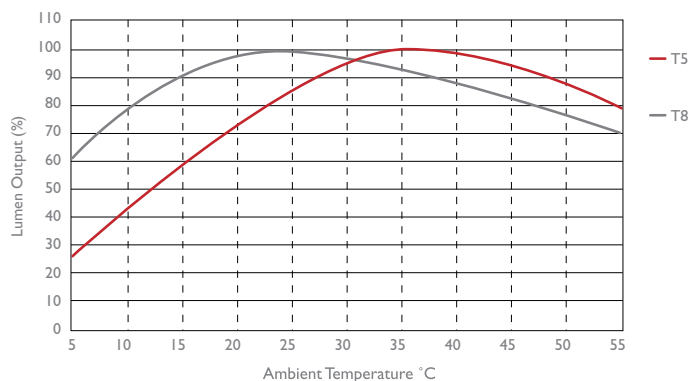

Philips T5 Lamp Family—Life Ratings

Products	Programmed Start ¹	
	Rated Average Life (Hrs.) ²	
	3 Hr. Start	12 Hr. Start
T5HE – 14W, 21W, 28W & 35W	25,000	35,000
T5HE – Energy Advantage F28T5/800/EA/ALTO 25W	35,000	40,000
T5HO – 24W, 39W & 54W	25,000	35,000
T5HO – Energy Advantage F54T5/800/HO/EA/ALTO 49W and Extra Energy Advantage F54T5/800/HO/EA/ALTO 44W	35,000	40,000
T5HO - Extra Long Life	50,000	65,000

1) Average life under engineering data on programmed start ballast with lamps turned off and restarted once every 3 or 12 operating hours as noted.
 2) Rated Average Life is the length of operation (in hours) at which point 50% of a large sample of lamps will still be operational and 50% will not.

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Average Life 3 Hr. Start (202)	Rated Average Life 12 Hr. Start (241)	Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI
-------	----------------	--------------------	---------------	-----------	-------------	-------------------	--------------------------------------	---------------------------------------	----------------------------------	---------------------	-----

T5 High Output (HO) Extra Long Life Lamps

T5 Miniature Bipin; Programmed Start (226)

54	45396-8	⊕†	F54T5/830/HO/XLL	40	TL 830, 3000K	46	50000	65000	5000	4700	85
	45397-6	⊕†	F54T5/841/HO/XLL	40	TL 841, 4100K	46	50000	65000	5000	4700	85
	45398-4	⊕†	F54T5/850/HO/XLL	40	TL 850, 5000K	46	50000	65000	4800	4510	82

T5 High Output (HO) Energy Advantage Lamps

T5 Miniature Bipin; Programmed Start (226)

44	41781-6	□■●⊕	F54T5/835/HO/XEW/ALTO 44W	40	TL 835, 3500K	46	35,000	40,000	4500	4275	85
	41782-4	□■●⊕	F54T5/841/HO/XEW/ALTO 44W	40	TL 841, 4100K	46	35,000	40,000	4500	4275	85
	41783-2	□■●⊕	F54T5/850/HO/XEW/ALTO 44W	40	TL 850, 5000K	46	35,000	40,000	4320	4100	82
49	22049-1	■●⊕	F54T5/830/HO/EA/ALTO 49W	40	TL 830, 3000K	46	35,000	40,000	5000	4750	85
	22050-9	■●⊕	F54T5/835/HO/EA/ALTO 49W	40	TL 835, 3500K	46	35,000	40,000	5000	4750	85
	22052-5	■●⊕	F54T5/841/HO/EA/ALTO 49W	40	TL 841, 4100K	46	35,000	40,000	4800	4600	85
	40649-6	■●⊕	F54T5/850/HO/EA/ALTO 49W	40	TL 850, 5000K	46	35,000	40,000	4850	4625	82

T5 High Output (HO) Energy Advantage Lamps “Extreme Temperature” with Amalgam Technology

T5 Miniature Bipin; Programmed Start (226)

49	40730-4	●⊕	F54T5/841/HO/A/EA/ALTO 49W	40	TL 841, 4100K	46	35,000	40,000	5000	4750	85
	40752-8	●⊕	F54T5/850/HO/A/EA/ALTO 49W	40	TL 850, 5000K	46	35,000	40,000	4800	4600	82


T5 High Output (HO) Lamps—(2ft–4ft)

T5 Miniature Bipin; Programmed Start (226)

24	29019-7	●	F24T5/830/HO/ALTO	40	TL 830, 3000K	22	25,000	35,000	1950	1850	85
	29020-5	●	F24T5/835/HO/ALTO	40	TL 835, 3500K	22	25,000	35,000	1950	1850	85
	29021-3	●	F24T5/841/HO/ALTO	40	TL 841, 4100K	22	25,000	35,000	1950	1850	85
39	29022-1	●	F39T5/830/HO/ALTO	40	TL 830, 3000K	34	25,000	35,000	3500	3325	85
	29023-9	●	F39T5/835/HO/ALTO	40	TL 835, 3500K	34	25,000	35,000	3500	3325	85
	29025-4	●	F39T5/841/HO/ALTO	40	TL 841, 4100K	34	25,000	35,000	3500	3325	85
54	29026-2	●⊕	F54T5/830/HO/ALTO	40	TL 830, 3000K	46	25,000	35,000	5000	4750	85
	29028-8	●⊕	F54T5/835/HO/ALTO	40	TL 835, 3500K	46	25,000	35,000	5000	4750	85
	29083-3	●⊕	F54T5/841/HO/ALTO	40	TL 841, 4100K	46	25,000	35,000	5000	4750	85
	13510-3	●⊕	F54T5/850/HO/ALTO	40	TL 850, 5000K	46	25,000	35,000	4800	4600	82
	14745-4	●⊕	F54T5/865/HO/ALTO	40	TL 865, 6500K	46	25,000	35,000	4650	4415	82

For the most current product information, go to the e-catalog on www.philips.com
Fluorescent symbols and footnotes located on page 42


Rated Average Life

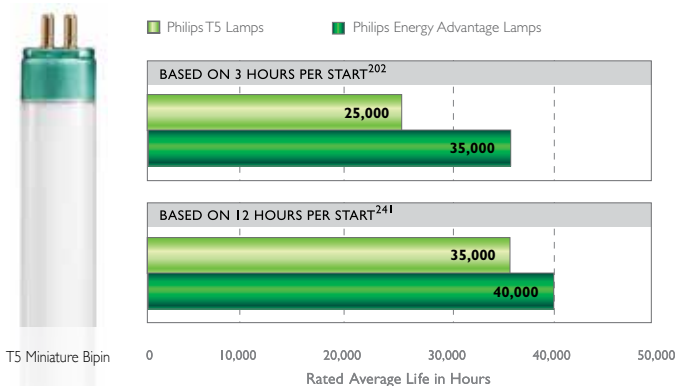

Performance

(Relative Light Output vs. Temperature)

Philips T5 Extreme Temperature Lamps vs. Standard F54T5 Lamps

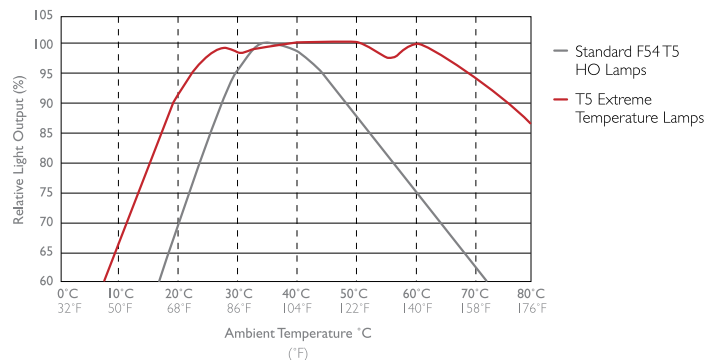

Fluorescent Lamps

T5 Linear Fluorescent Lamps

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Average Life		Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI
							3 Hr. Start (202)	12 Hr. Start (241)			

Energy Advantage T5 Lamps—(4ft)

T5 Miniature Bipin; Programmed Start (226)

25	40631-4	●●Ⓢ	F28T5/835/EA/ALTO 25W	40	TL 835, 3500K	46	35,000	40,000	2900	2750	85
	40632-2	●●Ⓢ	F28T5/841/EA/ALTO 25W	40	TL 841, 4100K	46	35,000	40,000	2900	2750	85
	41420-1	●●Ⓢ	F28T5/850/EA/ALTO 25W	40	TL 850, 5000K	46	35,000	40,000	2780	2640	82

T5 High Efficiency Lamps—(2ft–5ft)

T5 Miniature Bipin; Programmed Start (226)

14	23077-1	●	F14T5/830/ALTO	40	TL 830, 3000K	22	25,000	35,000	1350	1275	85
	23079-7	●	F14T5/835/ALTO	40	TL 835, 3500K	22	25,000	35,000	1350	1275	85
	23080-5	●	F14T5/841/ALTO	40	TL 841, 4100K	22	25,000	35,000	1350	1275	85
21	23081-3	●	F21T5/830/ALTO	40	TL 830, 3000K	34	25,000	35,000	2100	2000	85
	23082-1	●	F21T5/835/ALTO	40	TL 835, 3500K	34	25,000	35,000	2100	2000	85
	23083-9	●	F21T5/841/ALTO	40	TL 841, 4100K	34	25,000	35,000	2100	2000	85
28	23084-7	●Ⓢ	F28T5/830/ALTO	40	TL 830, 3000K	46	25,000	35,000	2900	2750	85
	23085-4	●Ⓢ	F28T5/835/ALTO	40	TL 835, 3500K	46	25,000	35,000	2900	2750	85
	40485-3	●Ⓢ	F28T5/835/ALTO	6	TL 835, 3500K	46	25,000	35,000	2900	2750	85
	23086-2	●Ⓢ	F28T5/841/ALTO	40	TL 841, 4100K	46	25,000	35,000	2900	2750	85
35	23088-8	●	F35T5/830/ALTO	40	TL 830, 3000K	58	25,000	35,000	3650	3450	85
	23095-3	●	F35T5/841/ALTO	40	TL 841, 4100K	58	25,000	35,000	3650	3450	85

For the most current product information, go to the e-catalog on www.philips.com
Fluorescent symbols and footnotes located on page 42

T5 Lumens at 35°C and 25°C



T5 Miniature Bipin

Lamp Type	Approx. Initial Lumens at 35°C (203, 204)	Approx. Initial Lumens at 25°C (203, 204)
F14T5	1350	1175
F21T5	2100	1800
F28T5	2900	2625
F35T5	3650	3275
F24T5/HO	1950	1675
F39T5/HO	3500	3100
F54T5/HO	5000	4450

Fluorescent Lamps

T5 Circular Lamps, Preheat Fluorescent Lamps

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Avg. Life (Hrs.) (202)	Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI
-------	----------------	--------------------	---------------	-----------	-------------	-------------------	------------------------------	----------------------------------	---------------------	-----

T5 Circular Fluorescent Lamps

2GX13 Base; Programmed Start


22	16601-7		TL5C 22W/830	10	Formerly FC9T5/830	9 OD	16,000	1800	1530	85
	16600-9		TL5C 22W/840	10	Formerly FC9T5/841	9 OD	16,000	1800	1530	85
40	14859-3		TL5C 40W/835	10	Formerly FC12T5/835	12 OD	16,000	3300	2805	85
55	16593-6		TL5C 55W/830	10	Formerly FC12T5/830/HO	12 OD	16,000	4200	3580	85
	16592-8		TL5C 55W/840	10	Formerly FC12T5/841/HO	12 OD	16,000	4200	3580	85

Preheat Fluorescent Lamps

T5 Miniature Bipin; Requires Use of Starters

4	33236-1		F4T5/CW	25	Cool White, 4100K	6	6000	135	95	59
6	33241-1		F6T5/CW	25	Cool White, 4100K	9	7500	295	230	59
8	33247-8		F8T5/CW	25	Cool White, 4100K	12	7500	400	300	59
13	33253-6		F13T5/CW	25	Cool White, 4100K	21	7500	820	655	59
	20703-5		F13T5/30U	25	Ultralume, 3000K	21	7500	1000	800	85

For the most current product information, go to the e-catalog on www.philips.com
Fluorescent symbols and footnotes located on page 42

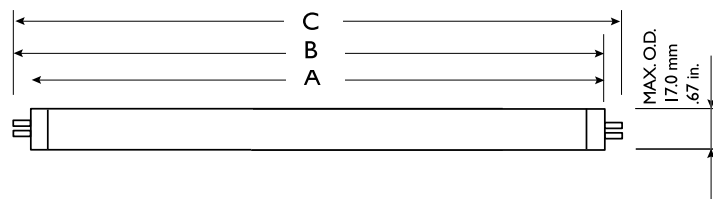

T5 and T5 High Output Dimensions (226)

Type	A Max. (Width)		B Min. (Width)		B Max. (Width)		C Max. (Width)	
	inches	mm	inches	mm	inches	mm	inches	mm
T5 14W/24W	21.61	549.0	21.80	553.7	21.89	556.1	22.17	563.2
T5 21W/39W	33.42	849.0	33.61	853.7	33.70	856.1	33.98	863.2
T5 28W/54W	45.24	1149.0	45.42	1153.7	45.52	1156.1	45.80	1163.2
T5 35W/80W	57.05	1449.0	57.23	1453.7	57.33	1456.1	57.61	1463.2

Philips ALTO II Technology

Philips T8 Fluorescent Lamps featuring ALTO II Technology

Better for your business, better for the environment



ALTO lamps with green endcaps have become synonymous with environmental responsibility and low mercury. Since the launch of ALTO Lamp Technology in 1995, 2.0 billion Philips fluorescent lamps with ALTO Lamp Technology have been produced with over 20 tons less mercury than previous non-ALTO lamps¹.

Philips launched ALTO II Technology in 2007. ALTO II Technology has 50% less mercury than prior T8 lamps featuring ALTO Technology, making these lamps the most sustainable linear fluorescents available. Best of all, these lamps offer the same performance levels as ALTO lamps (life, energy, and light output).

Philips T8 Lamp Limited Warranty Periods²

Philips Lamp	Instant Start Limited Warranty (3hr/12hr starts)	Programmed Start Limited Warranty (3hr/12hr starts)
T8 700, HL700 and 800 Series	30/30 Months	30/36 Months
Advantage T8 32W High Lumen	30/30 Months	36/36 Months
Plus T8 32W	36/42 Months	42/48 Months
T8 Energy Advantage and Value Energy Advantage 25W	36/42 Months	48/54 Months
Energy Advantage T8 25W XLL, 28W XLL & 32W XLL	42/48 Months	48/60 Months
32W Twice the Life T8 (2XL)	42/48 Months	48/72 Months
Energy Advantage T8 25W 2XL & 28W 2XL Twice the Life (2XL)	48/60 Months	60/84 Months

Did you know?

- ALTO II T8 lamps have warranty periods ranging from 2½–7 years³
- ALTO II T8 lamps require no burn in before dimming
- ALTO II T8 lamps can contribute to LEED-EB certification. For more information, go to ww.usgbc.org

Philips T8 Lamp Family—Life ratings

Philips Lamp	Instant Start ⁴		Programmed Start ⁵	
	3 hours	12 hours	3 hours	12 hours
T8 700, HL700 & 800 Series	24,000	30,000	30,000	36,000
Advantage T8 32W High Lumen	24,000	30,000	30,000	36,000
Plus T8 32W	30,000	36,000	36,000	44,000
T8 Energy Advantage & Value Energy Advantage 25W and 28W	32,000	38,000	38,000	44,000
Energy Advantage T8 25W XLL, 28W XLL & 32W Extra Long Life (XLL)	40,000	46,000	46,000	52,000
32W Twice the Life T8 (2XL)	46,000	52,000	60,000	70,000
Energy Advantage T8 25W 2XL & 28W 2XL Twice the Life (2XL)	60,000	68,000	80,000	90,000

1) [1994 industry average (22.8mg)—PLC average (4.0mg)] × 2 billion lamps. Convert to pounds by dividing by 454. Convert to tons by dividing by 2000.

2) Conditions apply—Based on maximum annual burn hours of 5110. Please contact Philips for warranty conditions for use of other equipment, including sensors.

3) Warranty Periods: 700 & 800 Series T8—30 months; Energy Advantage T8—36 months; PLUS T8—36 months; and Advantage T8—36 months; Extra Long Life T8—48 months; Energy Advantage Extra Long Life T8—48 months.

4) Average life under engineering data on instant start ballast with lamps turned off and restarted once every 3 or 12 operating hours as indicated.

5) Average life under engineering data on programmed start ballast with lamps turned off and restarted once every 3 or 12 operating hours as noted.

Fluorescent Lamps

Twice the Life (2XL) T8 Lamps

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Average Life		Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI
							3 Hr. Start (202)	12 Hr. Start (241)			

Twice the Life Energy Advantage 25 Watt T8 Fluorescent Lamp

T8 Medium Bipin Featuring ALTO II Technology

25	43395-2	Ⓢ Ⓢ Ⓢ †	F32T8/ADV830/2XL/ALTO 25W	30	Advantage 830, 3000K	48	60,000	68,000	2400	2305	85
	43396-0	Ⓢ Ⓢ Ⓢ †	F32T8/ADV835/2XL/ALTO 25W	30	Advantage 835, 3500K	48	60,000	68,000	2400	2305	84
	43397-8	Ⓢ Ⓢ Ⓢ †	F32T8/ADV841/2XL/ALTO 25W	30	Advantage 841, 4100K	48	60,000	68,000	2400	2305	82
	43398-6	Ⓢ Ⓢ Ⓢ †	F32T8/ADV850/2XL/ALTO 25W	30	Advantage 850, 5000K	48	60,000	68,000	2350	2255	82

Twice the Life Energy Advantage 28 Watt T8 Fluorescent Lamp

T8 Medium Bipin Featuring ALTO II Technology

28	43401-9	Ⓢ Ⓢ Ⓢ †	F32T8/ADV830/2XL/ALTO 28W	30	Advantage 830, 3000K	48	60,000	68,000	2650	2545	85
	43402-7	Ⓢ Ⓢ Ⓢ †	F32T8/ADV835/2XL/ALTO 28W	30	Advantage 835, 3500K	48	60,000	68,000	2650	2545	84
	43403-5	Ⓢ Ⓢ Ⓢ †	F32T8/ADV841/2XL/ALTO 28W	30	Advantage 841, 4100K	48	60,000	68,000	2650	2545	82
	43404-3	Ⓢ Ⓢ Ⓢ †	F32T8/ADV850/2XL/ALTO 28W	30	Advantage 850, 5000K	48	60,000	68,000	2600	2595	82

Twice the Life Energy Advantage 32 Watt T8 Fluorescent Lamp


T8 Medium Bipin Featuring ALTO II Technology

32	43405-0	Ⓢ Ⓢ †	F32T8/ADV835/2XL/ALTO	30	TL 835, 3500K	48	46,000	52,000	2950	2800	84
	43406-8	Ⓢ Ⓢ †	F32T8/ADV841/2XL/ALTO	30	TL 841, 4100K	48	46,000	52,000	2950	2800	82
	43407-6	Ⓢ Ⓢ †	F32T8/ADV850/2XL/ALTO	30	TL 850, 5000K	48	46,000	52,000	2850	2700	82

For the most current product information, go to the e-catalog on www.philips.com
Fluorescent symbols and footnotes located on page 42



96% Lumen Maintenance

Philips Energy Advantage T8 25W 2XL Lamps

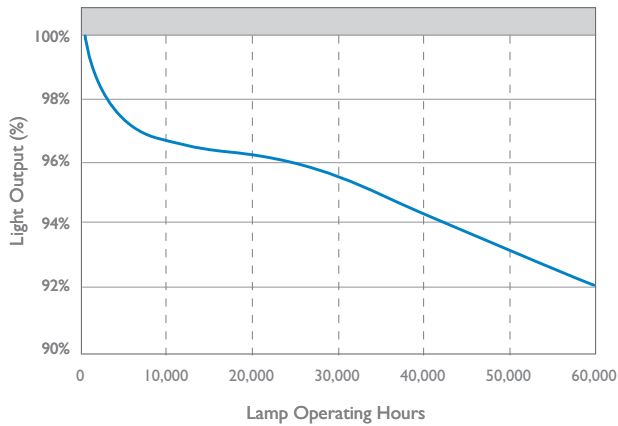

Rated Average Life

■ Instant Start Ballast ■ Programmed Start Ballast

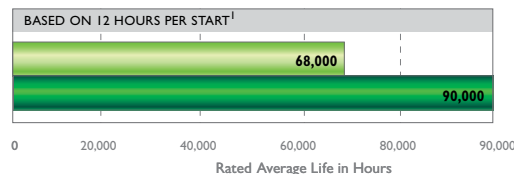

Fluorescent Lamps

Extra Long Life (XLL) Energy Advantage T8 Lamps

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Average Life		Approx. Initial Lumens (203,204)	Design Lumens (208, 239) CRI	
							3 Hr. Start (202)	12 Hr. Start (241)			

Extra Long Life Energy Advantage 25 Watt T8 Fluorescent Lamp

T8 Medium Bipin Featuring ALTO II Technology

25	28121-2	Ⓢ Ⓣ ●	F32T8/ADV830/XLL/ALTO 25 Watt	30	Advantage 830, 3000K	48	40,000	46,000	2400	2330	85
	28122-0	Ⓢ Ⓣ ●	F32T8/ADV835/XLL/ALTO 25 Watt	30	Advantage 835, 3500K	48	40,000	46,000	2400	2330	84
	28123-8	Ⓢ Ⓣ ●	F32T8/ADV841/XLL/ALTO 25 Watt	30	Advantage 841, 4100K	48	40,000	46,000	2400	2330	82
	28125-3	Ⓢ Ⓣ ●	F32T8/ADV850/XLL/ALTO 25 Watt	30	Advantage 850, 5000K	48	40,000	46,000	2350	2280	82

Extra Long Life Energy Advantage 28 Watt T8 Fluorescent Lamp


T8 Medium Bipin Featuring ALTO II Technology

28	28146-9	Ⓢ Ⓣ ●	F32T8/ADV830/XLL/ALTO 28 Watt	30	Advantage 830, 3000K	48	40,000	46,000	2675	2595	85
	28148-5	Ⓢ Ⓣ ●	F32T8/ADV835/XLL/ALTO 28 Watt	30	Advantage 835, 3500K	48	40,000	46,000	2675	2595	84
	28127-9	Ⓢ Ⓣ ●	F32T8/ADV841/XLL/ALTO 28 Watt	30	Advantage 841, 4100K	48	40,000	46,000	2675	2595	82
	28128-7	Ⓢ Ⓣ ●	F32T8/ADV850/XLL/ALTO 28 Watt	30	Advantage 850, 5000K	48	40,000	46,000	2625	2545	82

For the most current product information, go to the e-catalog on www.philips.com
Fluorescent symbols and footnotes located on page 42



97% Lumen Maintenance

Philips Energy Advantage T8 25W and 28W XEW and XLL Lamps

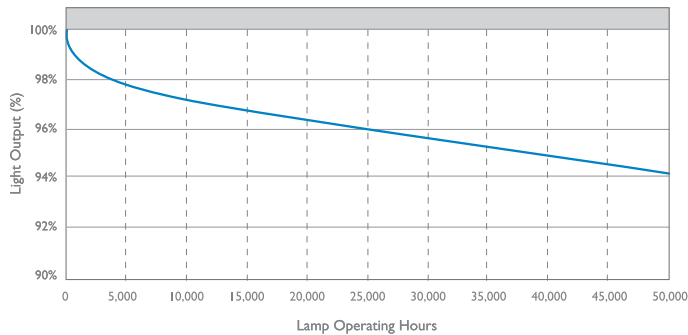

Rated Average Life

Instant Start Ballast (Light Green) Programmed Start Ballast (Dark Green)



T8 Medium Bipin

Rated Average Life in Hours

Fluorescent Lamps

Energy Advantage T8 Lamps

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Average Life 3 Hr. Start (202)	Rated Average Life 12 Hr. Start (241)	Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI
-------	----------------	--------------------	---------------	-----------	-------------	-------------------	--------------------------------------	---------------------------------------	----------------------------------	---------------------	-----

Energy Advantage T8 25 Watt Fluorescent Lamps

T8 Medium Bipin Featuring ALTO II Technology

25	28204-6	Ⓢ Ⓞ ●	F32T8/ADV830/XEW/ALTO 25 Watt	30	Advantage 830, 3000K	48	32,000	38,000	2500	2450	85
	28209-5	Ⓢ Ⓞ ●	F32T8/ADV835/XEW/ALTO 25 Watt	30	Advantage 835, 3500K	48	32,000	38,000	2500	2450	84
	28078-4	Ⓢ Ⓞ ●	F32T8/ADV841/XEW/ALTO 25 Watt	30	Advantage 841, 4100K	48	32,000	38,000	2500	2450	82
	28079-2	Ⓢ Ⓞ ●	F32T8/ADV850/XEW/ALTO 25 Watt	30	Advantage 850, 5000K	48	32,000	38,000	2400	2350	82

Energy Advantage T8 28 Watt Fluorescent Lamps


T8 Medium Bipin Featuring ALTO II Technology

28	28101-4	Ⓢ Ⓞ ●	F32T8/ADV830/EW/ALTO 28 Watt	30	Advantage 830, 3000K	48	32,000	38,000	2725	2645	85
	28102-2	Ⓢ Ⓞ ●	F32T8/ADV835/EW/ALTO 28 Watt	30	Advantage 835, 3500K	48	32,000	38,000	2725	2645	84
	28103-0	Ⓢ Ⓞ ●	F32T8/ADV841/EW/ALTO 28 Watt	30	Advantage 841, 4100K	48	32,000	38,000	2725	2645	82
	28105-5	Ⓢ Ⓞ ●	F32T8/ADV850/EW/ALTO 28 Watt	30	Advantage 850, 5000K	48	32,000	38,000	2675	2595	82

For the most current product information, go to the e-catalog on www.philips.com
Fluorescent symbols and footnotes located on page 42

Relative Light Output vs. Ambient Temperature

4' T8 Lamps—0.88 BF Ballast

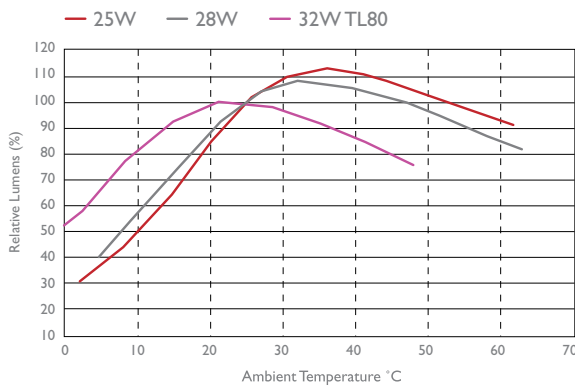


Relative light output with respect to 25°C rated temperature

Energy Advantage 25W T8 Savings

Save 7 Watts Instantly			
7 watts per lamp saved	Energy Savings Calculator		
	Annual Operating Hours**	Savings Over Lamp Life	
KWH Rate	4380	8760	38,000 hrs.
\$0.06	\$1.84	\$3.68	\$15.96
\$0.08	\$2.45	\$4.90	\$20.28
\$0.10	\$3.07	\$6.13	\$26.60
\$0.12	\$3.68	\$7.36	\$31.92
\$0.20	\$6.13	\$12.26	\$53.20

** 4380 hours are based on operating the lamps 12 hours per day/7 days per week.
8760 hours are based on operating the lamps 24 hours per day/7 days per week.

Rated Average Life

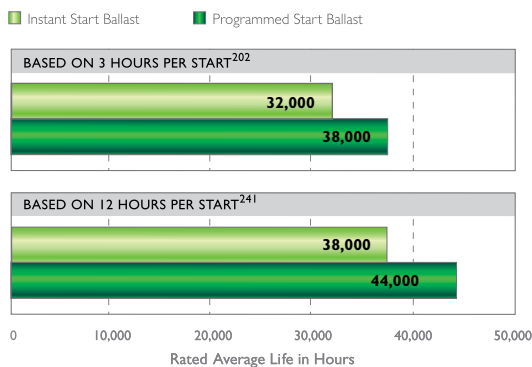

T8 Medium Bipin

Cost of Ownership Savings

Energy Advantage T8 fluorescent lamps vs. standard T8 lamps.

General Overview

Energy Advantage 25W T8 fluorescent lamps provide energy savings of up to 25% versus standard 32W T8, so the benefits and financial impact can be significant.

Benefits

By using Energy Advantage 25W T8 lamps the energy savings of 7 watts per lamp can be achieved instantly by simply changing the lamp.

Financial Impact

Energy Savings per Lamp	7 W
Operating Hours per Year	8760 hours, continuous burn
Cost per kWh	\$.10

Cost of Ownership Savings = \$6.13 per lamp per year

Fluorescent Lamps

Value Energy Advantage T8 Lamps

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Average Life		Approx. Initial Lumens (203,204)	Design Lumens (208, 239)	CRI
							3 Hr. Start (202)	12 Hr. Start (241)			

Energy Advantage T8 Value 28 Watt Fluorescent Lamps

T8 Medium Bipin Featuring ALTO II Technology

28	42417-6	■ ④ ●	F32T8/VEA835/EW/ALTO 28W	30	Value Energy Advantage 835, 3500K	48	32,000	38,000	2600	2550	82
	42419-2	■ ④ ●	F32T8/VEA841/EW/ALTO 28W	30	Value Advantage 841, 4100K	48	32,000	38,000	2600	2550	82
	42421-8	■ ④ ●	F32T8/VEA850/EW/ALTO 28W	30	Value Advantage 850, 5000K	48	32,000	38,000	2600	2550	82

Energy Advantage T8 Value 25 Watt Fluorescent Lamps

T8 Medium Bipin Featuring ALTO II Technology

25	42418-4	■ ④ ●	F32T8/VEA835/XEW/ALTO 25W	30	Value Energy Advantage 835, 3500K	48	32,000	38,000	2300	2250	82
	42420-0	■ ④ ●	F32T8/VEA841/XEW/ALTO 25W	30	Value Advantage 841, 4100K	48	32,000	38,000	2300	2250	82
	42422-6	■ ④ ●	F32T8/VEA850/XEW/ALTO 25W	30	Value Advantage 850, 5000K	48	32,000	38,000	2300	2250	82

For the most current product information, go to the e-catalog on www.philips.com
Fluorescent symbols and footnotes located on page 42



T8 Medium Bipin

Fluorescent Lamps

Advantage T8 Lamps

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Average Life		Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI
							3 Hr. Start (202)	12 Hr. Start (241)			

Advantage T8 High Lumen Fluorescent Lamps

T8 Medium Bipin Featuring ALTO II Technology

17	28130-3	Ⓢ ●	F17T8/ADV830/ALTO	30	Advantage 830, 3000K	24	24,000	30,000	1500	1450	85
	28131-1	Ⓢ ●	F17T8/ADV835/ALTO	30	Advantage 835, 3500K	24	24,000	30,000	1500	1450	84
	28132-9	Ⓢ ●	F17T8/ADV841/ALTO	30	Advantage 841, 4100K	24	24,000	30,000	1500	1450	82
25	28140-2	Ⓢ ●	F25T8/ADV835/ALTO	30	Advantage 835, 3500K	36	24,000	30,000	2380	2300	84
	28142-8	Ⓢ ●	F25T8/ADV841/ALTO	30	Advantage 841, 4100K	36	24,000	30,000	2380	2300	82
32	28080-0	Ⓢ ●	F32T8/ADV830/ALTO	30	Advantage 830, 3000K	48	24,000	30,000	3100	3000	85
	28081-8	Ⓢ ●	F32T8/ADV835/ALTO	30	Advantage 835, 3500K	48	24,000	30,000	3100	3000	84
	28085-9	Ⓢ ●	F32T8/ADV841/ALTO	30	Advantage 841, 4100K	48	24,000	30,000	3100	3000	82
	28089-1	Ⓢ ●	F32T8/ADV850/ALTO	30	Advantage 850, 5000K	48	24,000	30,000	3000	2910	82

For the most current product information, go to the e-catalog on www.philips.com
Fluorescent symbols and footnotes located on page 42

Energy Savings: Two Lamp vs. Two Lamp System

Electronic Ballast	Ballast Factor	No. of Lamps	Lamp Watts	Standard T8 Lumens	Advantage T8 Lumens	System Watts	Savings
Standard T8	0.87	2	32	2850	—	58	—
Reduced Light Output T8	0.75	2	32	—	3100	51	\$2.80/yr

Combine Advantage T8 lamps with reduced light output electronic ballasts, with these results:


- Saves 7 system watts vs. standard T8 system
- Saves \$2.80 per fixture per year
- Energy savings based on 4000 hrs/yr @ \$.10 kw/hr

Energy Savings: Two Lamp vs. Three Lamp System

Electronic Ballast	Ballast Factor	No. of Lamps	Lamp Watts	Standard T8 Lumens	Advantage T8 Lumens	System Watts	Savings
Standard T8	0.87	3	32	2850	—	88	—
Increased Light Output T8	1.20	2	32	—	3100	78	\$4.00/yr

Combine advantage T8 lamps with increased light output ballasts. A two lamp advantage T8 system vs. a three lamp standard T8 system will:

- Save 10 system watts
- Save \$4.00 per fixture per year
- Save energy based on 4000 hrs/yr @ \$.10 kw/hr
- Reduce lighting installation costs (lamps, ballasts, fixtures and labor)
- Operate on ballast with ballast factors up to 1.32 with warranty intact

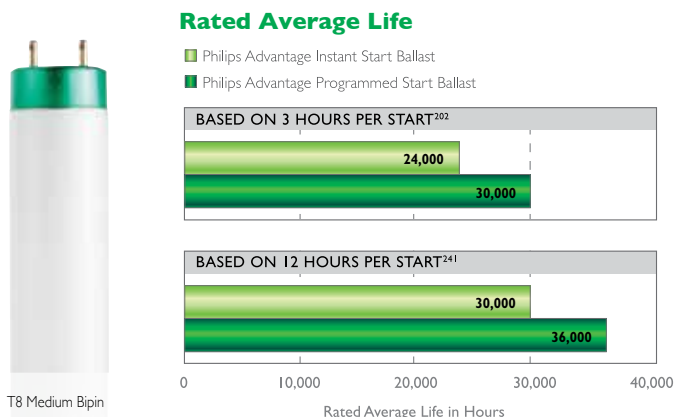

Fluorescent Lamps

PLUS 800 Series T8 Lamps, PLUS 700 Series T8 Lamps

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Average Life		Approx. Initial Lumens (203,204)	Design Lumens (208, 239) CRI	
							3 Hr. Start (202)	12 Hr. Start (241)			

PLUS 800 Series Long Life T8 Fluorescent Lamps

T8 Medium Bipin Featuring ALTO II Technology

17	28093-3	Ⓢ ●	F17T8/TL830/PLUS/ALTO	30	TL 830, 3000K	24	30,000	36,000	1400	1330	85
	28094-1	Ⓢ ●	F17T8/TL835/PLUS/ALTO	30	TL 835, 3500K	24	30,000	36,000	1400	1330	84
	28095-8	Ⓢ ●	F17T8/TL841/PLUS/ALTO	30	TL 841, 4100K	24	30,000	36,000	1400	1330	82
	28096-6	Ⓢ ●	F17T8/TL850/PLUS/ALTO	30	TL 850, 5000K	24	30,000	36,000	1325	1260	82
	28193-1	Ⓢ ●	F17T8/TL865/PLUS/ALTO	30	TL 865, 6500K	24	30,000	36,000	1275	1210	82
25	28097-4	Ⓢ ●	F25T8/TL830/PLUS/ALTO	30	TL 830, 3000K	36	30,000	36,000	2225	2115	85
	28098-2	Ⓢ ●	F25T8/TL835/PLUS/ALTO	30	TL 835, 3500K	36	30,000	36,000	2225	2115	84
	28099-0	Ⓢ ●	F25T8/TL841/PLUS/ALTO	30	TL 841, 4100K	36	30,000	36,000	2225	2115	82
32	28165-9	Ⓢ ●	F32T8/TL830/PLUS/ALTO	30	TL 830, 3000K	48	30,000	36,000	2950	2800	85
	28167-5	Ⓢ ●	F32T8/TL835/PLUS/ALTO	30	TL 835, 3500K	48	30,000	36,000	2950	2800	84
	28179-0	Ⓢ ●	F32T8/TL841/PLUS/ALTO	30	TL 841, 4100K	48	30,000	36,000	2950	2800	82
	28181-6	Ⓢ ●	F32T8/TL850/PLUS/ALTO	30	TL 850, 5000K	48	30,000	36,000	2850	2710	82

PLUS 700 Series Long Life T8 Fluorescent Lamps


T8 Medium Bipin Featuring ALTO II Technology

32	28182-4	Ⓢ ● 999	F32T8/TL730/PLUS/ALTO	30	TL 730, 3000K	48	30,000	36,000	2800	2660	78
	28183-2	Ⓢ ● 999	F32T8/TL735/PLUS/ALTO	30	TL 735, 3500K	48	30,000	36,000	2800	2660	78
	28184-0	Ⓢ ● 999	F32T8/TL741/PLUS/ALTO	30	TL 741, 4100K	48	30,000	36,000	2800	2660	78
	28185-7	Ⓢ ● 999	F32T8/TL750/PLUS/ALTO	30	TL 750, 5000K	48	30,000	36,000	2700	2550	78
	42306-1	Ⓢ ● 999	F32T8/TL765/PLUS/ALTO	30	TL 765, 6500K	48	30,000	36,000	2750	2610	78

For the most current product information, go to the e-catalog on www.philips.com
Fluorescent symbols and footnotes located on page 42

Rated Average Life

- Philips PLUS Instant Start Ballast
- Philips PLUS Programmed Start Ballast

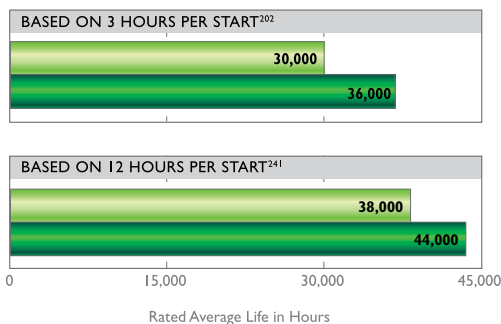

T8 Medium Bipin

Fluorescent Lamps

800 Series T8 Lamps, 700 Series T8 Lamps

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Average Life		Approx. Initial Lumens (203,204)	Design Lumens (208, 239)	CRI
							3 Hr. Start (202)	12 Hr. Start (241)			

800 Series T8 Fluorescent Lamps

T8 Medium Bipin Featuring ALTO II Technology

17	28188-1	●	F17T8/TL835/ALTO	30	TL 835, 3500K	24	24,000	30,000	1350	1280	84
	28189-9	●	F17T8/TL841/ALTO	30	TL 841, 4100K	24	24,000	30,000	1350	1280	82
	28090-9	●	F17T8/TL850/ALTO	30	TL 850, 5000K	24	24,000	30,000	1300	1235	82
25	28190-7	●	F25T8/TL835/ALTO	30	TL 835, 3500K	36	24,000	30,000	2150	2040	84
	28191-5	●	F25T8/TL841/ALTO	30	TL 841, 4100K	36	24,000	30,000	2150	2040	82
	28092-5	●	F25T8/TL850/ALTO	30	TL 850, 5000K	36	24,000	30,000	2150	2040	82
32	28151-9	●Ⓢ	F32T8/TL830/ALTO	30	TL 830, 3000K	48	24,000	30,000	2875	2735	85
	28153-5	●Ⓢ	F32T8/TL835/ALTO	30	TL 835, 3500K	48	24,000	30,000	2875	2735	84
	28155-0	●Ⓢ	F32T8/TL841/ALTO	30	TL 841, 4100K	48	24,000	30,000	2875	2735	82
	28156-8	●Ⓢ	F32T8/TL850/ALTO	30	TL 850, 5000K	48	24,000	30,000	2875	2735	82
40	36834-0	●	F40T8/TL835/ALTO	25	TL 835, 3500K	60	24,000	30,000	3725	3500	84
	36847-2	●	F40T8/TL841/ALTO	25	TL 841, 4100K	60	24,000	30,000	3725	3500	82

700 Series T8 Fluorescent Lamps



T8 Medium Bipin Featuring ALTO II Technology

32	28162-6	●Ⓢ 999	F32T8/TL730 ALTO	30	TL 730, 3000K	48	24,000	30,000	2700	2565	78
	28161-8	●Ⓢ 999	F32T8/TL735/ALTO	30	TL 735, 3500K	48	24,000	30,000	2700	2565	78
	28157-6	●Ⓢ 999	F32T8/TL741/ALTO	30	TL 741, 4100K	48	24,000	30,000	2700	2565	78
	38351-3	●Ⓢ 999	F32T8/TL741/ALTO	10	TL 741, 4100K, 10PK	48	24,000	30,000	2700	2565	78
	28163-4	●Ⓢ 999	F32T8/TL750/ALTO	30	TL 750, 5000K	48	24,000	30,000	2600	2470	78

For the most current product information, go to the e-catalog on www.philips.com
Fluorescent symbols and footnotes located on page 42

Rated Average Life

- Philips Universal Instant Start Ballast
- Philips Universal Programmed Start Ballast



0 10,000 20,000 30,000 40,000
Rated Average Life in Hours



T8 Medium Bipin

Fluorescent Lamps

New & Improved 700 Series T8 Fluorescent Lamps

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Average Life		Approx. Initial Lumens (203,204)	Design Lumens (208, 239) CRI	
							3 Hr. Start (202)	12 Hr. Start (241)			

New & Improved 700 Series T8 Fluorescent Lamps


T8 Medium Bipin Featuring ALTO II Technology

32	45366-2	● © †	F32T8/HL730/ALTO 30PK	30	TL 730, 3000K	48	24,000	30,000	2850	2710	78
	45373-8	● © †	F32T8/HL735/ALTO 30PK	30	TL 735, 3500K	48	24,000	30,000	2850	2710	78
	45375-3	● © †	F32T8/HL741/ALTO 30PK	30	TL 741, 4100K	48	24,000	30,000	2850	2710	78
	45374-6	● © †	F32T8/HL750/ALTO 30PK	30	TL 750, 5000K	48	24,000	30,000	2850	2710	78
	45379-5	● © †	F32T8/HL765/ALTO 30PK	30	TL 765, 6500K	48	24,000	30,000	2850	2710	75

For the most current product information, go to the e-catalog on www.philips.com
Fluorescent symbols and footnotes located on page 42

Rated Average Life

- Philips Universal Instant Start Ballast
- Philips Universal Programmed Start Ballast

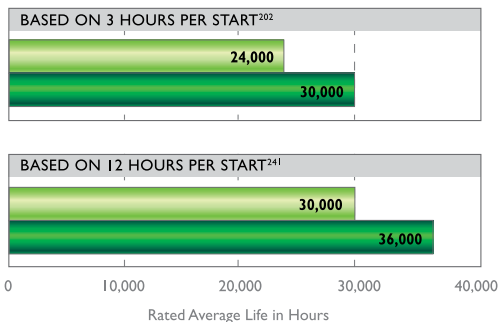

T8 Medium Bipin

Fluorescent Lamps

T8 U-Bent Lamps

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Average Life		Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI
							3 Hr. Start (202)	12 Hr. Start (241)			

Energy Advantage U-Bent 6" T8 Fluorescent Lamps

T8 Medium Bipin with 6" Wide Spacing (212)

25	20420-6	■●	FB32T8/ADV830/6/XEW/ALTO 25 WATT	20	TL 830, 3000K	22½	24,000	30,000	2400	2330	85
	20421-4	■●	FB32T8/ADV835/6/XEW/ALTO 25 WATT	20	TL 835, 3500K	22½	24,000	30,000	2400	2330	85
	20423-0	■●	FB32T8/ADV841/6/XEW/ALTO 25 WATT	20	TL 841, 4100K	22½	24,000	30,000	2400	2330	85
	20424-8	■●	FB32T8/ADV850/6/XEW/ALTO 25 WATT	20	TL 850, 5000K	22½	24,000	30,000	2350	2280	82

800 Series U-Bent Rapid Start T8 Fluorescent Lamps

T8 Medium Bipin with 6" Wide Spacing (212)

32	37897-6	●	FB32T8/TL830/6/ALTO	20	TL 830, 3000K	22½	24,000	30,000	2800	2535	85
	37900-8	●	FB32T8/TL835/6/ALTO	20	TL 835, 3500K	22½	24,000	30,000	2800	2535	85
	37902-4	●	FB32T8/TL841/6/ALTO	20	TL 841, 4100K	22½	24,000	30,000	2800	2535	85
	37880-2	●	FB32T8/TL850/6/ALTO	20	TL 850, 5000K	22½	24,000	30,000	2700	2450	82

700 Series U-Bent Rapid Start T8 Fluorescent Lamps

T8 Medium Bipin with 6" Wide Spacing (212)

32	37892-7	●999	FB32T8/TL730/6/ALTO	20	TL 730, 3000K	22½	20,000	24,000	2650	2370	78
	37893-5	●999	FB32T8/TL735/6/ALTO	20	TL 735, 3500K	22½	20,000	24,000	2650	2370	78
	37894-3	●999	FB32T8/TL741/6/ALTO	20	TL 741, 4100K	22½	20,000	24,000	2650	2370	78
	37882-8	●999	FB32T8/TL750/6/ALTO	20	TL 750, 5000K	22½	20,000	24,000	2600	2325	78

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Avg. Life (Hrs.) (202)		Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI

Energy Advantage U-Bent 1½" T8 Fluorescent Lamps

T8 Medium Bipin with 1½" Wide Spacing (212)

29	22675-3	■●	FB29T8/TL830/EA/ALTO	15	TL 830, 3000K	22½	24,000	2600	2470	85
	22676-1	■●	FB29T8/TL835/EA/ALTO	15	TL 835, 3500K	22½	24,000	2600	2470	85
	22677-9	■●	FB29T8/TL841/EA/ALTO	15	TL 841, 4100K	22½	24,000	2600	2470	85

800 Series U-Bent 1½" T8 Fluorescent Lamps

T8 Medium Bipin with 1½" Wide Spacing (212)

31	22671-2	●	FB31T8/TL830/ALTO	15	TL 830, 3000K	22½	24,000	2775	2636	85
	22672-0	●	FB31T8/TL835/ALTO	15	TL 835, 3500K	22½	24,000	2775	2636	85
	22674-6	●	FB31T8/TL841/ALTO	15	TL 841, 4100K	22½	24,000	2775	2636	85

For the most current product information, go to the e-catalog on www.philips.com
Fluorescent symbols and footnotes located on page 42



T8 U-Bent Lamp
Medium Bipin



T8 1½" U-Bent Lamp
Medium Bipin

Fluorescent Lamps

Rapid Start T8 Lamps, Preheat T8 Lamps

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Average Life		Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI
							3 Hr. Start (202)	12 Hr. Start (241)			

Rapid Start T8 Fluorescent Lamps

T8 Medium Bipin; High CRI

32	20905-6	■	F32T8/TL950	25	TL 950, 5000K	48	20,000	20,000	2000	1860	98
----	---------	---	-------------	----	---------------	----	--------	--------	------	------	----

Preheat T8 Fluorescent Lamps

T8 Medium Bipin Linear Fluorescent Lamps; Requires Use of Starters (202)

15	40720-5		F15T8D	25	Daylight, 6500K	18	7500	—	750	660	73
	40719-7		F15T8/CW	25	Cool White, 4100K	18	7500	—	870	765	59
	36436-4		F15T8/CW BULK	96	Cool White, 4100K	18	7500	—	850	750	59
	39226-6		F15T8/PLANT	6	Plant Lite, Sleeved	18	7500	—	410	N/A	N/A
30	28147-7	●	F30T8/CW/ALTO	25	Cool White, 4100K	36	7500	—	2200	2000	59

For the most current product information, go to the e-catalog on www.philips.com
Fluorescent symbols and footnotes located on page 42



T8 Medium Bipin

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Average Life		Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI
							3 Hr. Start (202)	12 Hr. Start (241)			

Energy Advantage T8 Slimline 8-Ft Fluorescent Lamps

T8 Single Pin; Featuring ALTO Lamp Technology; Instant Start

51	I6321-2	□ ⊕ ● ■	F96T8/ADV835/XEW/ALTO 51W	25	TL 835, 3500K	96	24,000	30,000	5300	4940	85
	I6331-1	□ ⊕ ● ■	F96T8/ADV841/XEW/ALTO 51W	25	TL 841, 4100K	96	24,000	30,000	5300	4940	85
	I6457-4	□ ⊕ ● ■	F96T8/ADV850/XEW/ALTO 51W	25	TL 850, 5000K	96	24,000	30,000	5200	4840	82

PLUS Slimline T8 8-Ft Fluorescent Lamps

T8 Single Pin; Featuring ALTO Lamp Technology; Instant Start

59	23684-4	□ ⊕ ●	F96T8/TL835/PLUS/ALTO	25	TL 835, 3500K	96	24,000	30,000	5900	5490	85
	23685-1	□ ⊕ ●	F96T8/TL841/PLUS/ALTO	25	TL 841, 4100K	96	24,000	30,000	5900	5490	85
	23686-9	□ ⊕ ●	F96T8/TL850/PLUS/ALTO	25	TL 850, 5000K	96	24,000	30,000	5780	5375	82

For the most current product information, go to the e-catalog on www.philips.com
Fluorescent symbols and footnotes located on page 42

PLUS Slimline T8 8-Ft Cost of Ownership Savings

PLUS Slimline 8-foot T8 Fluorescent Lamps vs. Standard 8-foot T8 Lamps

General Overview

PLUS Slimline 8-foot T8 fluorescent lamps may provide up to 60% longer life than standard 8-foot T8 products. With an incremental cost as little as \$1.00 per lamp, benefits and financial impact can be significant.

Benefits

By using PLUS Slimline 8-foot T8 lamps, the lamp replacement and labor costs are extended by an extra 2 years on a facility that operates an average of 4000 hours per year. For example, a standard 8-foot T8 product, with a rated average life expectancy of 15,000 hours, will last nearly 4 years (15,000 hours rated average life/4000 hours per year = 3¾ years).

Conversely, PLUS Slimline 8-foot T8 lamps will operate for 6 years due to their rated average life expectancy of 24,000 hours (24,000 hours rated average life/4000 hours per year = 6 years).

Financial Impact

With the extended life expectancy of 2 years and the benefits of Philips exclusive TCLP-compliant low mercury technology, the positive financial impact of installing PLUS Slimline 8-foot T8 lamps may provide cost of ownership savings per lamp as follows:

Incremental Cost	\$ (1.00)
Material Cost Avoidance ^A	\$ 4.00
Labor Cost Avoidance ^B	\$ 3.72
Disposal Cost Avoidance ^C	\$ 0.72
Cost of Ownership Savings	\$ 7.44

A Material Cost Avoidance is the annualized acquisition cost per lamp (average cost per lamp of \$7.50 for standard 8-Foot T8 product / 3 ¾ years = \$2.00 per year). By installing PLUS Slimline 8-Foot T8 lamps, a material cost per lamp of \$4.00 is avoided due to the extra 2 years of life expectancy. Note that the average cost per lamp may vary.

B Labor Cost Avoidance is the annualized labor replacement cost per lamp (labor replacement cost per lamp of \$7.00 / 3 years = \$1.86 per year). By installing PLUS Slimline 8-Foot T8 lamps, a labor replacement cost per lamp of \$3.72 is avoided due to the extra 2 years life expectancy. Note that the labor replacement cost per lamp may vary.


C Disposal Cost Avoidance is based on an average of \$.09 per foot for lamp recycling or \$.72 per 8-foot lamp. Philips Lighting Company encourages the recycling of all fluorescent lamps.



T8 Single Pin

Rated Average Life

■ Philips PLUS Slimline T8

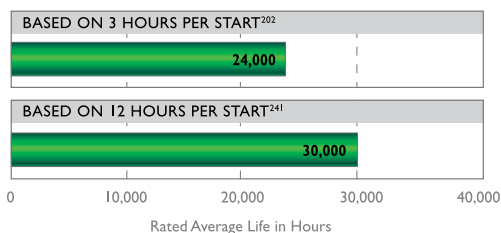

Fluorescent Lamps

High Output T8 Lamps, U-Bent T12 Lamps, Rapid Start T12 Lamps

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Average Life		Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI
							3 Hr. Start (202)	12 Hr. Start (241)			

PLUS High Output (HO) T8 8-Foot Fluorescent Lamps

T8 Recessed D.C.; Featuring ALTO Lamp Technology, Use on proper Programmed Start Ballasts Only*

86	23687-7	☐ ⊕ ●	F96T8/TL835/HO/PLUS/ALTO	25	TL 835, 3500K	96	24,000	30,000	8200	7625	85
	23688-5	☐ ⊕ ●	F96T8/TL841/HO/PLUS/ALTO	25	TL 841, 4100K	96	24,000	30,000	8200	7625	85
	23689-3	☐ ⊕ ●	F96T8/TL850/HO/PLUS/ALTO	25	TL 850 5000K	96	24,000	30,000	8100	7550	82

* Per ANSI C78.81, this lamp is designed for programmed start operation with high frequency operating currents of 400mA (nominally) to achieve the rated lumens and life

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Avg. Life (Hrs.) (202)	Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI
-------	----------------	--------------------	---------------	-----------	-------------	-------------------	------------------------------	----------------------------------	---------------------	-----

High Output (HO) T8 Fluorescent Lamps—4 foot

T8 Recessed D.C.; Featuring ALTO Lamp Technology, Use on proper Programmed Start Ballasts Only*

44	23679-4	☐ ●	F48T8/TL841/HO/ALTO	25	TL 841, 4100K	48	18,000	4000	3600	85
----	---------	-----	---------------------	----	---------------	----	--------	------	------	----

* Per ANSI C78.81, this lamp is designed for programmed start operation with high frequency operating currents of 400mA (nominally) to achieve the rated lumens and life

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Avg. Life (Hrs.) (202)	Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI
-------	----------------	--------------------	---------------	-----------	-------------	-------------------	------------------------------	----------------------------------	---------------------	-----

U-Bent T12 Fluorescent Lamps

T12 Medium Bipin

40	42309-5		FB40/T12/NX/6	12	Neutral Deluxe, 3500K	22 $\frac{1}{2}$	18,000	2300	1955	90
	42308-7		FB40/T12/CWSupreme/6	12	Cool White Supreme, 4100K	22 $\frac{1}{2}$	18,000	2300	1955	90
	21993-1		FB40/DX/6	12	Daylight Deluxe, 6500K	22 $\frac{1}{2}$	18,000	2250	1950	90

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Avg. Life (Hrs.) (202)	Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI
-------	----------------	--------------------	---------------	-----------	-------------	-------------------	------------------------------	----------------------------------	---------------------	-----

Rapid Start T12 Fluorescent Lamps

T12 Medium Bipin

30	37649-1	●	F30T12/D/RS/ALTO	30	Daylight, 6500K	36	18,000	1950	1700	73
	27242-7	●	F30T12/CW/RS/ALTO	30	Cool White, 4100K	36	18,000	2250	1900	59
	13221-7	●	F30T12/WW/RS/ALTO	30	Warm White, 3000K	36	18,000	2300	1950	49
40	42318-6		F40T12/NX/ALTO	30	Neutral Deluxe, 3500K	48	20,000	2550	2200	88
	42388-9		F40T12/CWSupreme/ALTO	30	Cool White Supreme, 4100K	48	20,000	2600	2250	89
	42312-9		F40T12/CWSupreme/PLUS/ALTO	30	Cool White Supreme, 4100K	48	24,000	2550	2220	89
	42389-7		F40T12/C50Supreme/ALTO	30	Color Tone 50 Supreme, 5000K	48	20,000	2500	2175	90
	27359-9		F40/DX/ALTO	30	Daylight Deluxe, 6500K	48	20,000	2325	2025	90
	39228-2		F40/PLANT	6	Plant Light, Sleeved	48	20,000	1600	1360	—

For the most current product information, go to the e-catalog on www.philips.com
Fluorescent symbols and footnotes located on page 42



Fluorescent Lamps

Preheat T12 Lamps, Slimline T12 Fluorescent Lamps, High Output T12 Lamps

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Avg. Life (Hrs.) (202)	Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI
-------	----------------	--------------------	---------------	-----------	-------------	-------------------	------------------------------	----------------------------------	---------------------	-----

Preheat T12 Fluorescent Lamps

T12 Medium Bipin Linear Fluorescent Lamps

14	14151-5		F14T12/CW	30	Cool White, 4100K	15	9000	710	590	59
15	14149-9		F15T12/CW 30PK	30	Cool White, 4100K	18	9000	800	695	62
20	27328-4	●	F20T12/D/ALTO	30	Daylight, 6500K	24	9000	960	960	73
	27332-6	●	F20T12/CW/ALTO	30	Cool White, 4100K	24	9000	1200	1050	59
	27349-0	●	F20T12/WW/ALTO	30	Warm White, 3000K	24	9000	1250	1100	49
	39227-4		F20T12/PLANT	6	Plant Lite, Sleeved	24	9000	600	500	—

Slimline T12 Fluorescent Lamps

T12 Single Pin Linear Fluorescent Lamps; Instant Start

39	36219-4	●	F48T12/D/ALTO	15	Daylight, 6500K	48	9000	2500	2220	73
	36321-8	●	F48T12/CW ALTO 15PK	15	Cool White, 4100K	48	9000	2950	2600	62
56	36985-0	●	F72T12/D/ALTO	15	Daylight, 6500K	72	12,000	3800	3350	73
	36989-2	●	F72T12/CW/ALTO	15	Cool White, 4100K	72	12,000	4450	3900	59
75	42305-3	●	F96T12/NX/ALTO	15	Neutral Deluxe, 3500K	96	12,000	5000	4250	88
	42319-4	●	F96T12/CWSupreme/ALTO	15	Cool White Supreme, 4100K	96	12,000	5000	4250	89
	42387-1	●	F96T12/C50Supreme/ALTO	15	Color Tone 50 Supreme, 5000K	96	12,000	5000	4350	90
	37282-1	●	F96T12/DX/ALTO	15	Daylight Deluxe, 6500K	96	12,000	4775	4200	90

High Output T12 Fluorescent Lamps (800ma)

T12 Recessed D.C. Linear Fluorescent Lamps (207, 214)

60	36984-3	●	F48T12/D/HO/ALTO	15	Daylight, 6500K	48	12,000	3400	3000	73
	36978-5	●	F48T12/CW/HO/ALTO	15	Cool White, 4100K	48	12,000	4050	3500	59
85	36653-4	●	F72T12/D/HO/ALTO	15	Daylight, 6500K	72	12,000	5600	4850	73
	36651-8	●	F72T12/CW/HO/ALTO	15	Cool White, 4100K	72	12,000	6350	5500	59
100	21489-0	●	F96T12/DX/HO	15	Daylight Deluxe, 6500K	96	12,000	6750	5800	90

High Output Outdoor Rated T12 Series Fluorescent Lamps (800ma)

T12 Recessed D.C. Linear Fluorescent Lamps; For Low Temperature Applications (223)

110	38177-4	●	F96T12/D/HO-O/ALTO	15	Daylight, 6500K	96	12,000	7800	6800	73
	38176-4	●	F96T12/CW/HO-O/ALTO	15	Cool White, 4100K	96	12,000	8800	7650	59

For the most current product information, go to the e-catalog on www.philips.com
Fluorescent symbols and footnotes located on page 42



T12 Medium Bipin



T12 Single Pin



T12 Recessed DC

Fluorescent Lamps

Very High Output T12, Gold Fluorescent, Appliance, T9 Circline Lamps

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Average Life		Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI
							3 Hr. Start (202)	12 Hr. Start (241)			

Very High Output T12 Fluorescent Lamps (1500ma)

T12 Recessed D.C. Linear Fluorescent Lamps (214)

110	21819-8		F48T12/CW/VHO	15	Cool White, 4100K	48	12,000	12,000	7050	4950	59
185	34232-9		F96T12/CW/VHO/EW	15	Cool White, 4100K	96	12,000	12,000	13,000	9000	59
215	34234-5		F96T12/CW/VHO	15	Cool White, 4100K	96	12,000	12,000	15,200	10,700	59

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Avg. Life (Hrs.) (202)		Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI

Gold Fluorescent Lamps

Blocks UV Emissions

32	45772-1		F32T8/GOLD PLUS	30	Gold Sleeved	48	24,000	1750	1480	—
40	43100-7		F40T12/GOLD	30	Gold Sleeved	48	20,000	1700	1465	—

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Avg. Life (Hrs.) (202)		Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI

Appliance Fluorescent Lamps

T8 Medium Bipin Linear Fluorescent Lamps; For use with Starters

18	23690-1		F18T8/CW/24	24	Cool White, 4100K	24	7500	1175	940	59
----	---------	--	-------------	----	-------------------	----	------	------	-----	----

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Avg. Life (Hrs.) (202)		Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI

Circline Fluorescent Lamps

T9 4-Pin Circular Fluorescent Lamps

20	24982-1		FC6T9/COOL WHITE PLUS	12	Cool White, 4100K	6 1/2 OD	12,000	800	590	59
22	39222-5		FC8T9/SOFT WHITE	12	3000K	8 OD	12,000	1150	875	85
	39235-7		FC8T9/DAYDLX	12	6500K	8 OD	12,000	910	675	79
	39116-9		FC8T9/COOL WHITE PLUS	12	Cool White, 4100K	8 OD	12,000	1050	775	59
32	39122-7		FC12T9/SOFT WHITE	12	3000K	12 OD	12,000	1900	1600	85
	26260-0		FC12T9/D	12	Daylight, 6500K	12 OD	12,000	1570	1300	73
	39117-7		FC12T9/COOL WHITE PLUS	12	Cool White, 4100K	12 OD	12,000	1800	1500	59
40	39118-5		FC16T9/COOL WHITE PLUS	12	Cool White, 4100K	16 OD	12,000	2500	1975	59

For the most current product information, go to the e-catalog on www.philips.com
Fluorescent symbols and footnotes located on page 42.



T12 Recessed DC



GOLD Lamp



T8 Medium Bipin



T9 4-Pin Circular

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Color Temp. (K)	Nom. Length (In.)	Rated Avg. Life (Hrs.)(241)	Approx. Initial Lumens (203,204)	CRI	Availability
-------	----------------	--------------------	---------------	-----------	-----------------	-------------------	-----------------------------	----------------------------------	-----	--------------

TuffGuard T5 Fluorescent Coated Lamps

T5 Miniature Bipin Linear Fluorescent Lamps

28	16417-8	●	F28T5/835/ALTO TG	40	3500	46	35,000	2900	85	Stocked
	16674-4	●	F28T5/841/ALTO TG	40	4100	46	35,000	2900	85	Stocked
44	42059-6	Ⓢ ● ■ †	F54T5/841/HO/XEW/ALTO 44W TG	40	3500	46	35,000	4500	85	Made to Order
49	16961-5	● ■ †	F54T5/841/HO/EA/ALTO 49W TG	40	4100	46	35,000	5000	85	Stocked
	40900-3	● ■ †	F54T5/850/HO/EA/ALTO 49W TG	40	5000	46	35,000	4850	82	Stocked
54	16672-8	●	F54T5/835/HO/ALTO TG	40	3500	46	35,000	5000	85	Stocked
	16298-2	●	F54T5/841/HO/ALTO TG	40	4100	46	35,000	5000	85	Stocked
	16686-8	●	F54T5/850/HO/ALTO TG	40	5000	46	35,000	4800	82	Stocked
	45286-2	●	F54T5/865/HO/ALTO TG	40	6500	46	35,000	4650	82	Made to Order

TuffGuard T8 Fluorescent Coated Lamps

T8 Medium Bipin Linear Fluorescent Lamps

25	28308-5	● ■	F32T8/ADV841/XEW/ALTO TG 25W	30	4100	48	38,000	2500	82	Stocked
	28312-7	● ■	F32T8/ADV850/XEW/ALTO TG 25W	30	5000	48	38,000	2400	82	Made to Order
28	28319-2	● ■	F32T8/ADV841/EW/ALTO TG 28W	30	4100	48	38,000	2725	82	Made to Order
32	45859-6	●	F32T8/ADV841/2XL/ALTO TG	30	4100	48	52,000	2950	85	Stocked
	28339-0	●	F32T8/ADV841/ALTO TG	30	4100	48	30,000	3150	82	Stocked
	28329-1	●	F32T8/ADV850/ALTO TG	30	5000	48	30,000	3000	82	Made to Order
	28345-7	●	F32T8/TL835/PLUS/ALTO TG	30	3500	48	36,000	2950	84	Stocked
	28346-5	●	F32T8/TL841/PLUS/ALTO TG	30	4100	48	36,000	2950	82	Stocked
	28347-3	●	F32T8/TL850/PLUS/ALTO TG	30	5000	48	36,000	2850	82	Stocked
	28335-8	●	F32T8/TL835/ALTO TG	30	3500	48	30,000	2850	84	Stocked
	28336-6	●	F32T8/TL841/ALTO TG	30	4100	48	30,000	2850	82	Made to Order
	28337-4	●	F32T8/TL850/ALTO TG	30	5000	48	30,000	2850	82	Made to Order
44	40905-2	●	F48T8/TL841/HO/ALTO TG	25	4100	48	18,000	4000	85	Made to Order
59	40909-4	●	F96T8/TL841/PLUS/ALTO TG	25	4100	96	30,000	5900	85	Made to Order
86	40912-8	●	F96T8/TL841/HO/PLUS/ALTO TG	25	4100	96	30,000	8200	85	Stocked

Note: Made to order products require a 3 week lead time.

For the most current product information, go to the e-catalog on www.philips.com

Fluorescent symbols and footnotes located on page 42



T5 Miniature Bipin



T8 Medium Bipin

Fluorescent Lamps

TuffGuard Lamps

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Color Temp. (K)	Nom. Length (In.)	Rated Avg. Life (Hrs.)(202)	Approx. Initial Lumens (203,204)	CRI	Availability
-------	----------------	--------------------	---------------	-----------	-----------------	-------------------	-----------------------------	----------------------------------	-----	--------------

TuffGuard T12 Fluorescent Coated Lamps

40	42400-2	●	F40T12/CWSUPREME/ALTO TG	30	4100	48	20,000	2600	89	Made To Order
	16299-0	●	F40DX/ALTO TG	30	6500	48	20,000	2325	90	Stocked
60	16296-6	●	F48T12/CW/HO/ALTO TG	15	4100	48	12,000	4050	59	Stocked
75	42316-0	●	F96T12/CWSUPREME/ALTO TG	15	4100	96	12,000	5000	89	Made To Order
	16297-4	●	F96T12/DX/ALTO/TG	15	6500	96	12,000	4500	90	Stocked
110	16301-4	●	F96T12/CW/HO-O/ALTO TG	15	4100	96	12,000	8800	59	Stocked

Note: Made to order products require a 3 week lead time.

For the most current product information, go to the e-catalog on www.philips.com

Fluorescent symbols and footnotes located on page 42



T12 Medium Bipin

T12
Single Pin

T12
Recessed DC Bay

Fluorescent Lamps

Consumer Lamps

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Avg. Life (Hrs.) (202)	Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI
-------	----------------	--------------------	---------------	-----------	-------------	-------------------	------------------------------	----------------------------------	---------------------	-----

T5 Fluorescent Lamps

Blister-Carded Linear Fluorescent Lamps; Miniature Bipin

4	39218-3		F4T5/SOFT WHITE	12/1	3000K	6	6000	150	120	85
6	39219-1		F6T5/SOFT WHITE	12/1	3000K	9	7500	325	260	85
8	39220-9		F8T5/SOFT WHITE	12/1	3000K	12	7500	450	360	85
	39114-4		F8T5/COOL WHITE PLUS	12/1	4100K	12	7500	400	300	59
	15756-0		F8T5/BLB UPC	25/1	—	12	7500	—	—	—
13	39221-7		F13T5/SOFT WHITE	12/1	3000K	21	7500	1000	800	85
	40974-8		F13T5/Cool White	12/1	4100K	21	7500	820	660	59

T5 Fluorescent Lamps

14	22091-3	●	F14T5/TL830 UPC 12/1	12/1	TL830, 3000K	22	25,000	1350	1275	85
21	22096-2	●	F21T5/TL830 UPC 12/1	12/1	TL830, 3000K	34	25,000	2100	2000	85
28	42917-5	●	F28T5/TL830 ALTO UPC 15/1	15/1	TL830, 3000K	46	25,000	2900	2750	85
	20613-6	●	F28T5/TL835 ALTO UPC 15/1	15/1	TL835, 3500K	46	25,000	2900	2750	85
	40963-1	●	F28T5/TL841 ALTO UPC 15/1	15/1	TL841, 4100K	46	25,000	2900	2750	85
54	41419-3	●	F54T5/TL841 ALTO UPC 15/1	15/1	TL841, 4100K	46	25,000	5000	4750	85
	45344-9	●	F54T5/TL841 ALTO 1/15	1/15	TL841, 4100K	46	25,000	5000	4750	85
	45624-4	●	F54T5/TL850 ALTO UPC 15/1	15/1	TL850, 5000K	46	25,000	4800	4600	82

For the most current product information, go to the e-catalog on www.philips.com
Fluorescent symbols and footnotes located on page 42



T5 Miniature Bipin

Fluorescent Lamps

Consumer Lamps

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Avg. Life (Hrs.) (202)	Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI
-------	----------------	--------------------	---------------	-----------	-------------	-------------------	------------------------------	----------------------------------	---------------------	-----

T8 Fluorescent Lamps

Medium Bipin & Single Pin Linear Fluorescent Lamps

15	39212-6	●	F15T8/Soft White	6/1	3000K Individually Sleeved	18	7500	1000	900	85
	39207-6	●	F15T8/Cool White Plus	6/1	4100K Individually Sleeved	18	7500	870	765	59
	39108-6	●	F15T8/Cool White Plus	6/1	4100K Individually Sleeved	24	7500	1175	1035	59
	39229-0		F15T8/NATURALSUNSHINE 6/1	6/1	5000K Individually Sleeved	18	7,500	590	475	92
	39226-6		F15T8/Plant	6/1	Individually Sleeved	18	7500	410	—	—
	15760-2		F15T8/Blacklight	6/1	Individually Sleeved	18	7500	—	—	—
17	28126-1	●	F17T8/Soft White UPC	30	3000K 30 Pk Case	24	20,000	1400	1300	85
30	39216-7	●	F30T8/Soft White	6/1	3000K Individually Sleeved	36	7500	2500	2250	85
	28145-1	●	F30T8/CW ALTO UPC	30	4100K Individually Sleeved	36	7500	2200	1760	59
32	42916-7	●†	F32T8/Plant-Aquarium SLV 6PK	6/1	Individually Sleeved	48	24,000	1400	—	—
	15238-9	●■	F32T8/ADV841/XEW/ALTO 25W 10PK	10	4100K 10 Pk Case	48	30,000	2500	2425	85
	20278-8	●	F32T8/TL841/XLL/ALTO 10PK	10	4100K 10 Pk Case	48	36,000	2950	2800	85
	22682-9	●	F32T8/SOFT WHITE /ALTO 36/2	36/2	3000K 2 Pk	48	24,000	2950	2800	84
	40943-3	●	F32T8/SOFT WHITE ALTO 10PK	10	3000K 10 Pk Case	48	24,000	2950	2800	85
	43449-8	●†	F32T8/TL835/ALTO 15/2	15/2	3500K 2 Pk	48	24,000	2875	2735	84
	43447-2	●†	F32T8/TL835 ALTO 10PK	10	3500K 10 Pk Case	48	24,000	2875	2735	84
	43448-0	●†	F32T8/TL835 ALTO 30PK	30	3500K 30 Pk Case	48	24,000	2875	2735	84
	43454-8	●†	F32T8/TL841 36/2	36/2	4100K 2 Pk	48	24,000	2875	2735	82
	43450-6	●†	F32T8/TL841 ALTO 10PK	10	4100K 10 Pk Case	48	24,000	2875	2735	82
	43453-0	●†	F32T8/TL841/ALTO 30PK	30	4100K 30 Pk Case	48	24,000	2875	2735	82
	43455-5		F32T8/TL841/ALTO TG UPC	6/1	Safety Coated 4100K Individual UPC	48	24,000	2875	2735	82
	40966-4	●	F32T8/TL850/ALTO 15/2	15/2	5000K 2 Pk	48	24,000	2850	2710	82
	20504-7	●	F32T8/TL850 ALTO 10PK	10	5000K 10 Pk Case	48	24,000	2850	2710	82
	28199-8	●	F32T8/TL850/ALTO 30PK	30	5000K 30 Pk Case	48	24,000	2850	2710	82
	45182-3	●†	F32T8/DAYLIGHT/ALTO 36/2	36/2	6500K 2 Pk	48	24,000	2850	2710	75
	45180-7	●†	F32T8/DAYLIGHT/ALTO 1/10	10	6500K 10 Pk Case	48	24,000	2850	2710	75
	45181-5	●†	F32T8/DAYLIGHT/ALTO 1/30	30	6500K 30 Pk Case	48	24,000	2850	2710	75

For the most current product information, go to the e-catalog on www.philips.com
Fluorescent symbols and footnotes located on page 42



T8 Medium Bipin

T8 Single Pin

Fluorescent Lamps

Consumer Lamps

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Avg. Life (Hrs.) (202)	Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI
-------	----------------	--------------------	---------------	-----------	-------------	-------------------	------------------------------	----------------------------------	---------------------	-----

T12 Fluorescent Lamps

Medium Bipin, Single Pin and High Output

14	14150-7		F14T12/SOFT WHITE	6/1	3000K Individually Sleeved	15	9000	700	560	85
15	14146-5		F15T12/SOFT WHITE	6/1	3000K Individually Sleeved	18	9000	800	720	85
20	39120-1	●	F20T12/SOFT WHITE	6/1	3000K Individually Sleeved	24	9000	1350	1215	85
	39230-8		F20T12/NATURAL SUNSHINE	6/1	5000K Individually Sleeved	24	9000	850	755	92
	39227-4		F20T12/PLANT	6/1	Individually Sleeved	24	9000	600	—	—
	15761-0		F20T12/BLACKLIGHT	6/1	Individually Sleeved	24	9000	—	—	—
	40945-8	●	F20T12/CW/ALTO	10	4100K 10 Pk Case	24	9000	1200	1050	59
	38693-8	●	F20T12/SPEC 35 UPC	30	3500K 30 Pk Case	24	9000	1200	1050	75
	20550-0	●	F20T12/CW/ALTO 15/2	15/2	4100K 2 Pk	24	9000	1200	1050	59
	20554-2	●	F20T12/DI/ALTO 15/2	15/2	6500K 2 Pk	24	9000	1075	960	73
	30	39215-9	●	F30T12/SOFT WHITE	6/1	3000K Individually Sleeved	36	18,000	2400	2160
40937-5		●	F30T12/DAYLIGHT DELUXE/ALTO	6/1	6500K Individually Sleeved	36	18,000	1950	1700	90
38694-6		●	F30T12/SPEC 35 UPC	30	3500K 30 Pk Case	36	18,000	2350	2080	73
40	39228-2		F40T12/PLANT	6/1	Individually Sleeved	48	20,000	1600	—	—
	15762-8	●	F40T12/BLACKLIGHT	6/1	Individually Sleeved	48	20,000	—	—	—
	42275-8	●	F40T12/SOFT WHITE DX/ALTO 1/10	1/10	Soft White Deluxe, 3000K 10Pk Case	48	20,000	2600	2260	88
	42276-6	●	F40T12/SOFT WHITE DX/ALTO 15/2	15/2	Soft White Deluxe, 3000K 2PK	48	20,000	2600	2260	88
	42272-5	●	F40T12/NEUTRAL DX/ALTO 1/10	1/10	Neutral Deluxe, 3500K 10Pk Case	48	20,000	2600	2260	88
	42273-3	●	F40T12/NEUTRAL DX/ALTO 1/30	1/30	Neutral Deluxe, 3500K 30Pk Case	48	20,000	2550	2200	88
	42274-1	●	F40T12/NEUTRAL DX/ALTO 15/2	15/2	Neutral Deluxe, 3500K, 2Pk	48	20,000	2550	2200	88
	42267-5	●	F40T12/CWSUPREME/ALTO 1/10	1/10	Cool White Supreme, 4100K 10Pk Case	48	20,000	2600	2250	89
	42270-9	●	F40T12/CWSUPREME/ALTO 1/30	1/30	Cool White Supreme, 4100K 30Pk Case	48	20,000	2600	2250	89
	42268-3	(420,423)	F40T12/CW SUPREME/ALTO TG UPC 10/1PK	10/1	Safety Coated 4100K Individual UPC	48	20,000	2600	2250	89
	42281-6	●	F40T12/CWSUPREME/ALTO 36/2	36/2	Cool White Supreme, 4100K 2Pk	48	20,000	2600	2250	89
	42283-2	●	F40T12/CWSUPREME/PLUS/ALTO 1/10	1/10	Cool White Supreme, 4100K 10Pk Case	48	24,000	2550	2220	89
	42285-7	●	F40T12/CWSUPREME/PLUS/ALTO 15/2	15/2	Cool White Supreme, 4100K 2Pk	48	24,000	2550	2220	89
	42396-1	●	F40T12/C50 NATURAL SUPREME 1/10	10	Natural Light, 5000K 10Pk Case	48	20,000	2500	2250	92
	42395-3	●	F40T12/C50 NATURAL SUPREME 1/30	30	Natural Light, 5000K 30Pk Case	48	20,000	2500	2250	92
	42397-9	●	F40T12/C50 NATURAL SUPREME 15/2	15/2	Natural Light, 5000K 2Pk	48	20,000	2500	2250	92
38752-2	●	F40T12/DAYDLX	10	6500K 10 Pk Case	48	20,000	2325	2025	90	
22683-7	●	F40T12/DAYDELUX ALTO 36/2PK	36/2	6500K 2 Pk	48	20,000	2325	2025	90	
40938-3	●	F40T12/DAYLIGHT DELUXE/ALTO	30	6500K 30 Pk Case	48	20,000	2325	2025	90	
56	36999-1	●	F72T12/CW/ALTO UPC	15	4100K 15 Pk Case	72	12,000	4450	3900	59
	36982-7	●	F48T12/CW/HO/UPC	15	4100K 15 Pk Case	48	12,000	4050	3500	59
75	37663-2	●	F96T12/DAYDLX/ ALTO 8/2PK	8/2	6500K 2 PK	96	12,000	4775	4200	90
	42279-0	●	F96T12/NX/ALTO 8/2	8/2	Neutral Deluxe, 3500K 2Pk	96	12,000	5000	4250	88
	42277-4	●	F96T12/CWSupreme/ALTO 1/15	1/15	Cool White Supreme, 4100K 15Pk Case	96	12,000	5000	4250	89
	42278-2	●	F96T12/CWSupreme/ALTO 8/2	8/2	Cool White Supreme, 4100K 2Pk	96	12,000	5000	4250	89
	42398-7	●	F96T12/C50 Natural Supreme 8/2	8/2	Natural Light, 5000K 2Pk	96	12,000	4800	4350	90
110	38176-4	●	F96T12/CW/HO-O/ALTO	15	Cool White, 4100K 15 Pk Case	96	12,000	8800	7650	59
	20544-3	●	F96T12/CW/HO-O/ALTO	8/2	4100K 2 Pk	96	12,000	8800	7650	59

For the most current product information, go to the e-catalog on www.philips.com
Fluorescent symbols and footnotes located on page 42

Fluorescent Lamps

Consumer Lamps

Watts	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.	Description	Nom. Length (In.)	Rated Avg. Life (Hrs.) (202)	Approx. Initial Lumens (203,204)	Design Lumens (208)	CRI
-------	----------------	--------------------	---------------	-----------	-------------	-------------------	------------------------------	----------------------------------	---------------------	-----

Circline Fluorescent Lamps

T9 Circular 4-Pin Fluorescent Lamps

22	39222-5		FC8T9/SOFT WHITE	12/1	3000K Individually Sleeved	8 OD	12,000	1150	875	85
	39116-9		FC8T9/COOL WHITE PLUS	12/1	4100K Individually Sleeved	8 OD	12,000	1050	775	59
	39235-7		FC8T9/DAYDLX	12/1	6500K Individually Sleeved	8 OD	12,000	910	675	79
32	39122-7		FC12T9/SOFT WHITE	12/1	3000K Individually Sleeved	12 OD	12,000	1900	1600	85
	39117-7		FC12T9/COOL WHITE PLUS	12/1	4100K Individually Sleeved	12 OD	12,000	1800	1500	59
	26260-0		FC12T9/DAYLIGHT DELUXE	12/1	6500K Individually Sleeved	13 OD	12,000	1570	1300	79
40	39118-5		FC16T9/COOL WHITE PLUS	12/1	4100K Individually Sleeved	16 OD	12,000	2500	1975	59

U-Bent T8

T8 Medium Bipin

32	434522	● †	FB32T8/TL835/6/ALTO UPC 10/1	10/1	TL80, 3500K Individually Sleeved	22 $\frac{3}{8}$	24,000	2800	2535	85
	434514	● †	FB32T8/TL841/6/ALTO UPC 10/1	10/1	TL80, 4100K Individually Sleeved	22 $\frac{3}{8}$	24,000	2800	2535	85

Rapid Start U-Bent T12

T12 Medium Bipin

40	42280-8		FB40/T12/CWSupreme/6 UPC 12/1	12/1	Cool White Supreme, 4100K	22 $\frac{3}{8}$	18,000	2300	1955	90
	42282-4		FB40/T12/Neutral DX/6 UPC 12/1	12/1	Neutral Deluxe, 3500K	22 $\frac{3}{8}$	18,000	2300	1955	90
	21993-1		FB40DX/6	12/1	Daylight Deluxe, 6500K	22 $\frac{3}{8}$	18,000	2250	1950	90

For the most current product information, go to the e-catalog on www.philips.com
Fluorescent symbols and footnotes located on page 42



T9 4-Pin Circular



T8 U-Bent




T12 U-Bent
Medium Bipin

Fluorescent Lamps




Base Types and Bulb Shapes

Base Types (Not Actual Sizes)

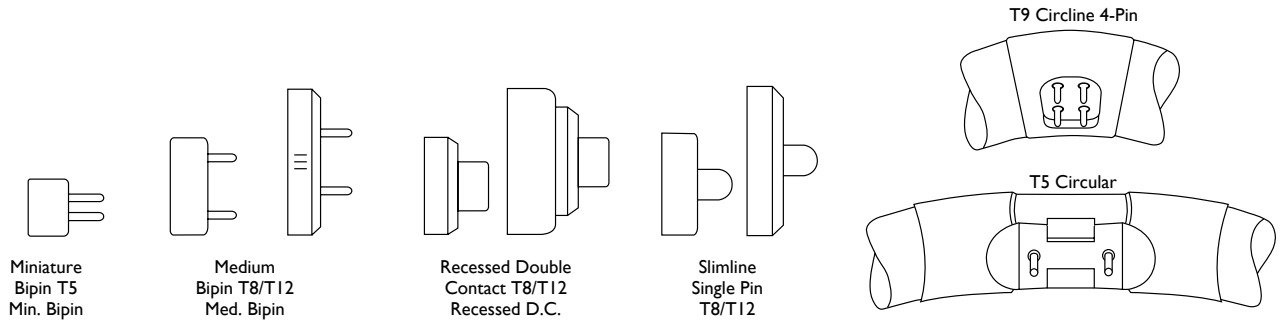

Bulb Shapes (Not Actual Sizes)

The size and shape of a bulb is designated by a letter or letters followed by a number. The letter indicates the shape of the bulb, while the number indicates the diameter of the bulb in eighths of an inch. For example, "T12" indicates a tubular shaped bulb having a diameter of $1\frac{1}{2}$ inches. The following illustrations show some of the more popular bulb shapes and sizes.

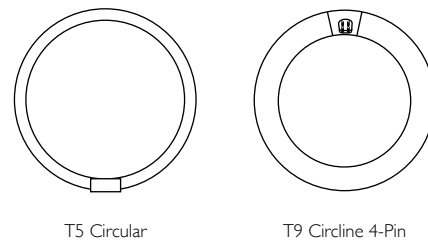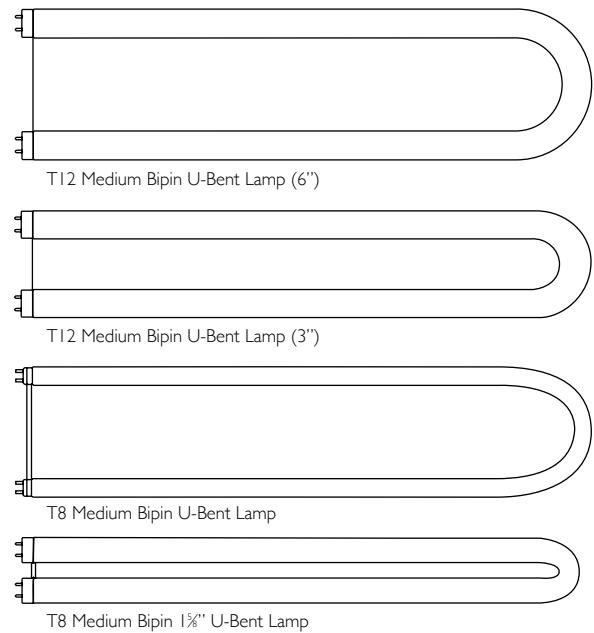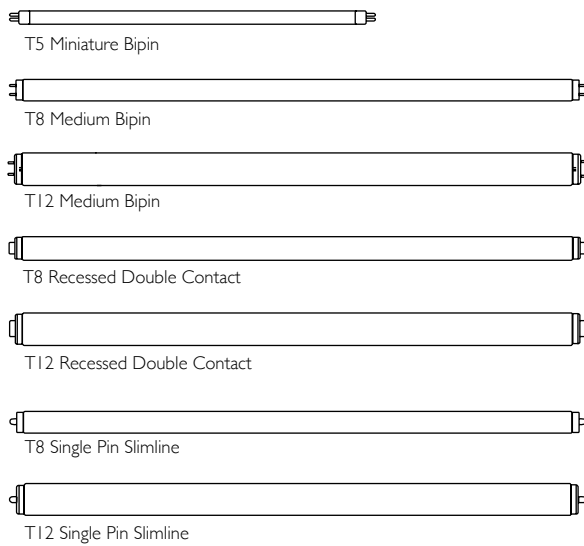

Fluorescent Lamps

Symbols and Footnotes

For the most current product information, go to the e-catalog on www.philips.com

☐ Exclusive to Philips Lighting North America Corporation

● This lamp is better for the environment because of its reduced mercury content. All Philips ALTO lamps give you end-of-life options, which can simplify and reduce your lamp disposal costs, depending on your state and local regulations. ALTO II Lamps have only 1.7mg of mercury.

Ⓞ This Bulb Meets US Federal Minimum Efficiency Standard. Philips designs and manufactures fluorescent lamps to the following lighting industry standard: NEMA Standard LSD 26—Measurement Methods and Performance Tolerances for Verification Testing of General Purpose Incandescent and Fluorescent Lamps

↑ New since last printing

■ Energy Saving Product

(202) Average life under specified test conditions with lamps turned off and restarted no more frequently than once every 3 operating hours. Lamp life is appreciably longer if lamps are started less frequently. Rated Average Life is the length of operation (in hours) at which point 50% of a large sample of lamps will still be operational and 50% will not.

(203) Approximate initial lumens. The lamp lumen output is based upon lamp performance after 100 hours of operating life, when the output is measured during operation on a reference ballast under standard laboratory conditions.

(204) For expected lamp lumen output, commercial ballast manufacturers can advise the appropriate ballast factor for each of their ballasts when they are informed of the designated lamp. The ballast factor is a multiplier applied to the designated lamp lumen output.

(207) Approximate initial lumens are for 800 ma. operation. For 1000 ma. operation, lumens are approximately 10% higher and watts approximately 15% higher.

(208) Design lumens are the approximate lamp lumen output at 40% of the lamp's rated average life. This output is based upon measurements obtained during lamp operation on a reference ballast under standard laboratory conditions.

(212) Nominal length measured from face of base to maximum distant outside point of U. Measurement does not include base pins. Leg spacing center to center approximately 6", for /6 and 3 3/4" for /3 lamps.

(214) Econ-o-watt lamps are only recommended for use on high power factor lead, indoor ballasts that meet ANSI standards. The lamps are not recommended for use in drafty areas, or locations where the ambient temperature is less than 60°F, except as noted. Also they should not be operated on low power factor ballasts, reduced light or reduced current ballasts, dimming ballasts or emergency system inverter ballasts.

(223) Meets the National Energy Policy Act of 1992 exemption for outdoor or cold temperature applications only.

(226) T5 nominal lamp lengths are shorter than standard sizes. See chart on page 27 for details.

(241) Average life under engineering data with lamps turned off and restarted once every 12 operating hours. Rated Average Life is the length of operation (in hours) at which point 50% of a large sample of lamps will still be operational and 50% will not.

(999) Lamps are no longer manufactured as of July 14, 2014 but inventory may be available.

Fluorescent Lamps

Cross Reference Guide

Philips	GE	OSI
F15T8/CW/24/ALTO	F24" T8/CW/4	F18T8/CW/K/24
F20T12/CW/ALTO (6PK)	F20T12/CW (6 Pack)	F20T12/CW/6
F30T12/CW/RS/EW/ALTO	F30T12/CW/RS/WM	F30T12/CW/RS/SS
TL 80		
F17T8/TL841/ALTO	F17T8/SPX41	FO17/841
F25T8/TL841/ALTO	F25T8/SPX41	FO25/841
F32T8/TL841/ALTO	F32T8/SPX41	FO32/841
F40T8/TL841/ALTO	F40T8/SPX41	FO40/841
F96T8/TL841/ALTO	F96T8/SPX41	FO96/841
FB32T8/TL841/ALTO	F32T8/SPX41/U/6	FBO32/841/6
Long Life	XL EXTRA-LIFE	XP
F17T8/TL841/PLUS/ALTO	F17T8/XL/SPX41/ECO	FO17/841/XP/ECO
F25T8/TL841/PLUS/ALTO	F25T8/XL/SPX41/ECO	FO25/841/XP/ECO
F32T8/TL841/PLUS/ALTO	F32T8/XL/SPX41/ECO	FO32/841/XP/ECO
Energy Savings	WATTMISER/ULTRAMAX	SS
F32T8/ADV841/EW/ALTO 28 Watt	F28T8/XL/SP41/WM/ECO	FO28/841/XP/SS/ECO
F32T8/ADV841/XEW/ALTO 25 Watt	F32T8/25W/SPX41/ECO	FO32/25W/841/XP/SS/ECO
F96T12/CW/HO-O/ALTO	F96T12/CW/HO/CT	F96T12/CW/HO/COLD TEMP
F96T12/CW/VHO/EW/ALTO	F96PG17/CW/WM	F96T12/CW/VHO/SS
F48T12/CW/VHO	F48T12/CW/I500	F48T12/CW/VHO
F96T12/CW/VHO	F96T12/CW/I500	F96T12/CW/VHO

Fluorescent Lamps

Cross Reference Guide

Color Cross Reference Guide

Philips	GE	OSI
SPEC		
SPEC 30 or 730	SP 30	D 30
SPEC 35 or 735	SP 35	D 35
SPEC 41 or 741	SP 41	D 41
Ultralume	Designer 800	
27 or 27U	SPX 27	27K
30U or 830	SPX 30	D 830
35U or 835	SPX 35	D 835
41U or 841	SPX 41	D 841
C50	C50	DSGN50

Light Source Color Chart

Fluorescent Color	Color Abbreviation	Atmosphere	Light Output (%) In 4' Lamp	CCT	CRI	CIE Color Coordinates	
						X	Y
Cool White	CW	Cool	100	4100K	62	0.38	0.38
Deluxe Cool White	CWX	Cool	72	4100K	89	0.376	0.367
Daylight	D	Cool Daylight	85	6500K	79	0.313	0.337
Daylight Deluxe	DX	Cool Daylight	76	6500K	84	0.314	0.341
Lite White	LW	Cool	104	4200K	51	0.376	0.386
Natural	N	Neutral	69	3700K	90	0.384	0.357
3000K, SPEC30	SPEC30	Warm	105	3000K	70	0.444	0.409
3500K, SPEC35	SPEC35	Neutral	105	3500K	73	0.41	0.395
4100K, SPEC41	SPEC41	Cool	105	4100K	70	0.382	0.385
Warm White	WW	Warm	102	3000K	53	0.44	0.403
Colortone 50	C50	Daylight	72	5000K	92	0.345	0.359
Colortone 75	C75	Daylight Plus	66	7500K	95	0.299	0.316
3000K, Ultralume	30U	Warm	108	3000K	85	0.444	0.409
3500K, Ultralume	35U	Neutral	108	3500K	85	0.413	0.395
4100K, Ultralume	41U	Cool	108	4100K	85	0.382	0.385
5000K, Ultralume	50U	Daylight	93	5000K	85	0.346	0.356
3000K, TL 80	TL830	Warm	98	3000K	86	0.439	0.402
3500K, TL 80	TL835	Neutral	98	3500K	86	0.41	0.395
4100K, TL 80	TL841	Cool	98	4100K	86	0.382	0.385
5000K, TL 80	TL850	Daylight	97	5000K	86	0.346	0.356
5000K, TL 90	TL950	Daylight	66	5000K	98	0.344	0.355
Advantage T8 830	ADV830	Warm	105	3000K	86	0.444	0.409
Advantage T8 835	ADV835	Neutral	105	3500K	86	0.41	0.395
Advantage T8 841	ADV841	Cool	105	4100K	86	0.382	0.385
Advantage T8 850	ADV850	Daylight	105	5000K	86	0.346	0.36

Residential Applications Light Source Color Chart

















Fluorescent Color	Light Output Atmosphere	Light Output (%) In 4' Lamp	CCT	CRI	Lighted Appearance CIE Color Coordinates	
					X	Y
Cool White Plus	Cool	105	4100K	62-70	0.382	0.385
Natural Sunshine	Daylight	72	5000K	92	0.345	0.359
Soft White	Warm	108	3000K	85	0.444	0.409

Correlated Color Temperature, CCT, describes the apparent color, or chromaticity, of a light source. Fluorescent light sources of 3000K, for example, Warm White or 3000K Ultralume, have a warm chromaticity, while 5000K lamps such as Colortone® 50 or 5000K Ultralume have a higher blue content and are considered to be cooler in color.

Color Rendering Index, CRI, is a relative value that indicates the color rendering quality of illumination provided by a light source. The higher the index number, the better the quality of illumination. While one lamp may have the same apparent color in CCT as another, its ability to render colors properly may be more or less than another light source. For example, Warm White 3000K 53 CRI lamps will not render colors of objects in an illuminated space as well as 3000K Ultralume 85 CRI lamps.

Both CCT and CRI should be cited together when properly describing light source color attributes.

Contents

	EnergySaver Twisters Page 48		EnergySaver A-Shape Page 49		EnergySaver Reflectors Page 50
	EnergySaver Fan Page 51		EnergySaver Candle Page 51		EnergySaver Globe Page 51
	EnergySaver Outdoor Page 52		EnergySaver Universal Page 52		EnergySaver TuffGuard Page 52
	EnergySaver Silicone Page 53		PL-S Short Lamps Page 55		PL-C Cluster Lamps Page 55
	PL-T Triple Lamps Page 57		PL-L Long Lamps Page 58		PL-Q Square Lamps Page 59
	PL Consumer Lamps Page 59				









Switching from incandescent to compact fluorescent lamps can significantly lower energy consumption and operating costs.

Better for your business, better for the environment

Philips EnergySaver compact fluorescent bulbs can help reduce your electricity bill and save energy, while helping you create a relaxing, inviting atmosphere. From table lamps and recessed lighting to decorative fixtures, compact fluorescents are available in the shapes and sizes you are accustomed to.

Selecting the right type

There are 2 types of CFL bulbs; one with an integrated ballast (CFLi) and one without an integrated ballast (CFLni). Both types provide energy efficiency and long life. The integrated CFLi bulbs are a direct replacement for traditional incandescent bulbs, fitting into most standard fixtures. The non-integrated CFLni bulbs offer designers, specifiers and end users versatility in configurations, size, and application possibilities.

Current Product	Philips Upgrade Product	Benefit	Page
 <p>65W BR30 Incandescent</p>	 <p>EnergySaver 15W R30 Dimmable</p>	<ul style="list-style-type: none"> • Smooth dimming curve • Compatible with many household dimmer switches¹ 	50
 <p>60W A19 Incandescent</p>	 <p>EnergySaver T2 Twister 13W</p>	<ul style="list-style-type: none"> • Small size mini twister fits more fixtures • 10,000 hours rated average life 	48
 <p>40W PL-L</p>	 <p>Energy Advantage PL-L 25W</p>	<ul style="list-style-type: none"> • 95% lumen maintenance • 20% energy savings (when compared to a PL-L 40W)* • Only 1.4mg of mercury 	58

Actual lumen values may vary

1) For compatible dimmers, please see: http://www.usa.lighting.philips.com/connect/tools_literature/compatibility.wpd

* On Instant Start Ballast, a standard PL-L 40W only draws 32 Watts, so the actual savings is 7 Watts (32W - 25W = 7W). 40W - 32W = 8W / 40 = 20%

Compact Fluorescent Lamps

EnergySaver Twisters

Inc. Equiv. Watts	Watts Bulb	Base	Product Number	Symbols, Footnotes	Description	Ordering Code	Pkg. Type	Case Qty.	MOL (In.)	Diam (In.)	Rated Avg. Life (Hrs.) (230)	CRI	Brightness (Lumens) (231)	Life (Yrs.) (446)	Energy Cost (445)	Light Appear. (CCT)	FTC REQUIREMENTS*	
																	9000	9000
9	40	T2 Twister Med.	41398-8	■ †	Mini Twister Soft White	EL/mdTTQS 9WT2	Box	6	3 3/8	1 1/8	10,000	82	550	9.1	\$1.08	2700		
			45518-8	■	Mini Twister Soft White	SBC-EL/mdTQS 9WT2	Standing Blister	6	3 3/8	1 1/8	10,000	82	550	9.1	\$1.08	2700		
			41706-3	■	Mini Twister Soft White	BC-EL/mdTQS 9WT2 4PK	Blister	6	3 3/8	1 1/8	10,000	82	550	9.1	\$1.08	2700		
13	60	T2 Twister Med.	41399-6	■	Mini Twister Soft White	EL/mdTQS 13WT2	Box	6	4	2	10,000	82	900	9.1	\$1.57	2700		
			45519-6	■	Mini Twister Soft White	SBC-EL/mdTQS 13WT2	Blister	6	4	2	10,000	82	900	9.1	\$1.57	2700		
			41707-1	■	Mini Twister Soft White	BC-EL/mdTQS 13WT2 4PK	Blister	6	4	2	10,000	82	900	9.1	\$1.57	2700		
			41806-1	■	Mini Twister Soft White	SBC-EL/mdTQS 13WT2 3PK	Standing Blister	6	4	2	10,000	82	900	9.1	\$1.57	2700		
			41402-9		Mini Twister White Light	EL/mdTQS 13WT2 3.5K	Box	6	4	2	10,000	82	900	9.1	\$1.57	3500		
			41403-7		Mini Twister Cool White	EL/mdTQS 13WT2 4.1K	Box	6	4	2	10,000	82	900	9.1	\$1.57	4100		
			41404-5		Mini Twister Bright White	EL/mdTQS 13WT2 5K	Box	6	4	2	10,000	82	860	9.1	\$1.57	5000		
			42009-1		Mini Twister Daylight	BC-EL/mdTQS 13WT2 6.5K 4PK	Blister	6	4	2	10,000	82	860	9.1	\$1.57	6500		
			41807-9		Mini Twister Daylight	SBC-EL/mdTQS 13WT2 6.5K 3PK	Standing Blister	6	4	2	10,000	82	860	9.1	\$1.57	6500		
18	75	T2 Twister Med.	41400-3	■	Mini Twister Soft White	EL/mdTQS 18WT2	Box	6	4 1/8	2 1/8	10,000	82	1250	9.1	\$2.17	2700		
			45520-4	■ †	Mini Twister Soft White	SBC-EL/mdTQS 18WT2	Standing Blister	6	4 1/8	2 1/8	10,000	82	1250	9.1	\$2.17	2700		
			41708-9	■	Mini Twister Soft White	BC-EL/mdTQS 18WT2 4PK	Blister	6	4 1/8	2 1/8	10,000	82	1250	9.1	\$2.17	2700		
			41808-7	■	Mini Twister Soft White	SBC-EL/mdTQS 18WT2 3PK	Standing Blister	6	4 1/8	2 1/8	10,000	82	1250	9.1	\$2.17	2700		
23	100	T2 Twister Med.	41401-1	■	Mini Twister Soft White	EL/mdTQS 23WT2	Box	6	4 3/8	2 3/8	10,000	82	1600	9.1	\$2.77	2700		
			45521-2	■ †	Mini Twister Soft White	SBC-EL/mdTQS 23WT2	Standing Blister	6	4 3/8	2 3/8	10,000	82	1600	9.1	\$2.77	2700		
			41709-7	■	Mini Twister Soft White	BC-EL/mdTQS 23WT2 4PK	Blister	6	4 3/8	2 3/8	10,000	82	1600	9.1	\$2.77	2700		
			41809-5	■	Mini Twister Soft White	SBC-EL/mdTQS 23WT2 3PK	Standing Blister	6	4 3/8	2 3/8	10,000	82	1600	9.1	\$2.77	2700		
			41405-2		Mini Twister White Light	EL/mdTQS 23WT2 3.5K	Box	6	4 3/8	2 3/8	10,000	82	1600	9.1	\$2.77	3500		
			41406-0		Mini Twister Cool White	EL/mdTQS 23WT2 4.1K	Box	6	4 3/8	2 3/8	10,000	82	1600	9.1	\$2.77	4100		
			41407-8		Mini Twister Bright White	EL/mdTQS 23WT2 5K	Box	6	4 3/8	2 3/8	10,000	82	1600	9.1	\$2.77	5000		
			43355-7	■ †	Mini Twister Daylight Deluxe	BC-EL/mdTQS 23WT2 6.5K 4PK	Blister	6	4 3/8	2 3/8	10,000	82	1600	9.1	\$2.77	6500		
26	100	T2 Twister Med.	41410-2	■	Mini Twister Soft White	EL/mdTQS 26WT2	Box	6	4 1/2	2	10,000	82	1800	9.1	\$3.13	2700		
			41408-6		Mini Twister Cool White	EL/mdTQS 26WT2 4.1K	Box	6	4 1/2	2	10,000	82	1800	9.1	\$3.13	4100		
			41409-4		Mini Twister Bright White	EL/mdTQS 26WT2 5K	Box	6	4 1/2	2	10,000	82	1700	9.1	\$3.13	5000		

EnergySaver Twister

5	25	Twister Med.	14792-6		Twister Soft White	EL/mdT 5W	Box	6	3 3/8	1 1/8	10,000	82	250	9.1	\$0.60	2700
32	125	Twister Med.	15639-8		Twister Soft White	EL/mdT 32W	Box	6	5 3/8	2 3/8	10,000	82	2200	9.1	\$3.85	2700
42	150	Twister Med.	13948-5		Twister Soft White	EL/dT 42W	Box	6	6 3/8	2 3/8	12,000	82	2800	9.1	\$5.06	2700

For the most current product information, go to the e-catalog on www.philips.com

Compact fluorescent symbols and footnotes located on page 61



Compact Fluorescent Lamps

EnergySaver Twisters, A-Shape Lamps

Inc. Equiv. Watts	Watts	Bulb	Base	Product Number	Symbols, Footnotes	Description	Ordering Code	Pkg. Type	Case Qty.	MOL (In.)	Diam. (In.)	Rated Avg. Life (Hrs.) (230)	Brightness (Lumens) (231)	Life (Yrs.) (446)	Energy Cost (445)	Light Appear. (CCT)
-------------------	-------	------	------	----------------	--------------------	-------------	---------------	-----------	-----------	-----------	-------------	------------------------------	---------------------------	-------------------	-------------------	---------------------

EnergySaver Twister Dimmable

FTC REQUIREMENTS*

20	75	Twist. Dim	Med.	42003-4	■	Twister Dim Soft White	EL/mdT 20W 1% Dim	Box	6	4 1/2	2 1/2	10,000	82	1250	9.1	\$2.41	2700
				42005-9	■	Twister Dim Soft White	BC-EL/mdT 20W 1% Dim	Blister	6	4 1/2	2 1/2	10,000	82	1250	9.1	\$2.41	2700

EnergySaver Twister GU24

13	60	Twist. GU24		45419-9	■ †	Twister GU24 Soft White	EL/mdTQS 13W GU24	Box	6	4	2	10,000	82	900	9.1	\$1.57	2700
				45416-5	■ †	Twister GU24 Cool White	EL/mdTQS 13W GU24 4.1K	Box	6	4	2	10,000	82	900	9.1	\$1.57	4100
18	75	Twist. GU24		45420-7	■ †	Twister GU24 Soft White	EL/mdTQS 18W GU24	Box	6	4 1/2	2 1/2	10,000	82	1250	9.1	\$2.17	2700
				45417-3	■ †	Twister GU24 Cool White	EL/mdTQS 18W GU24 4.1K	Box	6	4 1/2	2 1/2	10,000	82	1250	9.1	\$2.17	4100
23	100	Twist. GU24		45421-5	■ †	Twister GU24 Soft White	EL/mdTQS 23W GU24	Box	6	4 1/2	2 1/2	10,000	82	1600	9.1	\$2.77	2700
				45418-1	■ †	Twister GU24 Cool White	EL/mdTQS 23W GU24 4.1K	Box	6	4 1/2	2 1/2	10,000	82	1600	9.1	\$2.77	4100

EnergySaver Twister 3-Way

11	50	Twister	Med.	21193-8	•	Twist. 3-Way	EL/3W 11-23-34	Box	6	6 1/2	2 1/2	10,000	82	700	9.1	\$1.32	2700
23	100					Double Helix								1500		\$2.77	
34	150													2200		\$4.10	

EnergySaver A-Shape

9	40	A19	Med.	41736-0		A19 Soft White	EL/A SWP 9W	Box	6	4 1/2	2 1/2	8000	82	450	7.3	\$1.08	2700
14	60	A19	Med.	41737-8		A19 Soft White	EL/A SWP 14W	Box	6	4 1/2	2 1/2	8000	82	800	7.3	\$1.69	2700
				41981-2		A19 Soft White	BC-EL/A SWP 14W	Standing Blister	4	4 1/2	2 1/2	8000	82	800	7.3	\$1.69	2700
				41980-4		A19 Soft White	BC-EL/A A60 14W 3PK	Standing Blister	4	4 1/2	2 1/2	8000	82	800	7.3	\$1.69	2700
20	75	A21	Med.	20080-8		A21 Soft White	EL/A SWP 20W	Box	6	5 1/2	2 1/2	8000	82	1100	7.3	\$2.41	2700

* Will be replaced by 456830

For the most current product information, go to the e-catalog on www.philips.com
Compact fluorescent symbols and footnotes located on page 61



20W Twister Dimmable Med.

32W Twister Dimmable Med.

GU24 Twister GU24

3-Way Twister Med.

A-Shape SWP Med.

Compact Fluorescent Lamps

EnergySaver Reflectors

Inc. Watts	Equiv. Watts	Bulb	Base	Product Number	Symbols, Footnotes	Description	Ordering Code	Pkg. Type	Case Qty.	MOL (In.)	Diam. (In.)	Rated Avg. Life (Hrs.) (230)	Brightness (Lumens) (231)	Life (Yrs.) (446)	Energy Cost (445)	Light Appear. (CCT)	
EnergySaver Reflector																	
13	50	R20	Med.	42682-5		R20 Soft White	EL/A R20 13W	Box	6	4 7/8	2 1/2	8000	82	470	7.3	\$1.57	2700
				42683-3		R20 Soft White	BC-EL/A R20 13W	Standing Blister	3	4 7/8	2 1/2	8000	82	470	7.3	\$1.57	3000
15	75	R30	Med.	15703-2	■	R30 Soft White	EL/A R30 15W	Box	6	5 1/2	3 3/8	8000	82	750	7.3	\$1.81	2700
				40621-5	■	R30 Soft White	EL/A R30 15W 2PK	Box	6	5 1/2	3 3/8	8000	82	750	7.3	\$1.81	2700
				41862-4	■	R30 Cool White	EL/A R30 15W 4.1K	Box	6	5 1/2	3 3/8	8000	82	750	7.3	\$1.81	4100
23	120	R40	Med.	15702-4		R40 Soft White	EL/A R40 23W	Box	6	6 1/2	4 1/8	8000	82	1250	7.3	\$2.77	2700
				41995-1		PAR38 Soft White	EL/A PAR38 23W	Box	6	6 1/2	4 1/8	8000	82	1300	7.3	\$2.77	2700
				15716-4		PAR38 2pc Soft White	EL/A PAR38 23W 2pc	Box	6	5 3/4	4 1/8	8000	82	1300	7.3	\$2.77	2700
				22791-8	•	PAR38 2pc Soft White	EL/A PAR38 23W 2pc	Box	4	5 3/4	4 1/8	8000	82	1300	7.3	\$2.77	2700
	90	PAR38	Med.	40892-2		PAR38 2pc Soft White	EL/A PAR38 23W 2pc 2pk	Box	4	5 3/4	4 1/8	8000	82	1300	7.3	\$2.77	2700
				Hard PAR38 Med.													

FTC REQUIREMENTS*

EnergySaver Dimmable Reflector

16	65	R30 DIM	Med.	41997-7	■	R30 Dimm. Soft White	EL/A R30 EDIM 16W	Box	6	5 1/2	3 3/8	10,000	82	630	9.1	\$1.93	2700
				41998-5	■	R30 Dimm. Soft White	BC-EL/A R30 EDIM 16W	Standing Blister	5	5 1/2	3 3/8	10,000	82	630	9.1	\$1.93	2700
20	75	R40 DIM	Med.	41999-3	■	R40 Dimm. Soft White	EL/A R40 EDIM 19W	Box	6	6	4 1/8	10,000	82	900	9.1	\$2.41	2700
				42000-0	■	R40 Dimm. Soft White	BC-EL/A R40 EDIM 19W	Blister	4	6	4 1/8	10,000	82	900	9.1	\$2.41	2700

* Will be replaced by 456848

For the most current product information, go to the e-catalog on www.philips.com

Compact fluorescent symbols and footnotes located on page 61



Compact Fluorescent Lamps

EnergySaver Decoratives

Inc. Equiv. Watts	Watts	Bulb	Base	Product Number	Symbols, Footnotes	Description	Ordering Code	Pkg. Type	Case Qty.	MOL (In.)	Diam. (In.)	Rated Life (Hrs.) (230)	Avg. Life (Hrs.) (230)	Brightness (Lumens) (231)	Life (Yrs.) (446)	Energy Cost (445)	Light Appear. (CCT)
EnergySaver Fan																	
5	25	Fan	Med.	41747-7		Fan Soft White	EL/A FAN 5W	Box	6	3 3/8	1 1/2	8000	82	215	7.3	\$0.60	2700
				41745-1		Fan Soft White	BC-EL/A FAN 5W 3PK	Standing Blister	4	3 3/8	1 1/2	8000	82	215	7.3	\$0.60	2700
9	40	Fan	Med.	45535-2	†	Fan Soft White	BC-EL/A FAN 9W	Standing Blister	4	4 1/8	2 1/2	8000	82	450	7.3	\$1.80	2700
				41977-0		Fan Soft White	BC-EL/A FAN 9W 3PK	Standing Blister	4	4 1/8	2 1/2	8000	82	450	7.3	\$1.80	2700
EnergySaver Candle																	
5	25	mCan	Cand.	42230-3		Candle Soft White	EL/mCan T2 5W	Box	6	4 1/8	1 1/2	8000	82	215	7.3	\$0.60	2700
		Can	Med.	42229-5		Candle Soft White	EL/Can T2 5W	Box	6	4 1/8	1 1/2	8000	82	215	7.3	\$0.60	2700
9	40	mCan	Cand.	41741-0		Candle Soft White	EL/mCan T2 9W	Box	6	4 1/8	1 1/2	8000	82	410	7.3	\$1.08	2700
				45533-7	†	Candle Soft White	BC-EL/mCan T2 9W	Standing Blister	4	4 1/8	1 1/2	8000	82	410	7.3	\$1.08	2700
		Can	Med.	45534-5	†	Candle Soft White	BC-EL/Can T2 9W	Standing Blister	4	4 1/8	1 1/2	8000	82	410	7.3	\$1.08	2700
EnergySaver Globe																	
9	40	G25	Med.	41735-2		G25 Globe Soft White	EL/A G25 T3 9W	Box	6	4 1/8	3 1/8	8000	82	500	7.3	\$1.08	2700
				417337		G25 Globe Soft White	BC-EL/A G25 T3 9W 3PK	Standing Blister	4	4 1/8	3 1/8	8000	82	500	7.3	\$1.08	2700
				417345		G25 Globe Soft White	BC-EL/A G25 T3 9W	Standing Blister	4	4 1/8	3 1/8	8000	82	500	7.3	\$1.08	2700
23	75	G40	Med.	21107-8		G40 Globe Soft White	EL/A G40 23W	Box	6	6 1/8	6	8000	82	1400	7.3	\$2.77	2700

For the most current product information, go to the e-catalog on www.philips.com
Compact fluorescent symbols and footnotes located on page 61



Compact Fluorescent Lamps

EnergySaver Outdoor, Universal, TuffGuard Lamps

Inc. Equiv. Watts	Watts	Bulb	Base	Product Number	Symbols, Footnotes	Description	Ordering Code	Pkg. Type	Case Qty.	MOL (In.)	Diam. (In.)	Rated Life (Hrs.) (230)	Avg. CRI	Brightness (Lumens) (231)	Life (Yrs.) (446)	Energy Cost (445)	Light Appear. (CCT)
EnergySaver Outdoor														FTC REQUIREMENTS*			
14	60	Twister	Med.	40585-2	■	Dusk to Dawn	BC-EL/mdT D2D 14W	Standing Blister	4	4	2	10,000	82	900	9.1	\$1.69	2700
		A19	Med.	41748-5		A19 Bug-A-Way	BC-EL/A SWP 14W BAW	Standing Blister	4	4 1/2	2 1/2	10,000	-	600	9.1	\$1.69	Yellow
		T16	Med.	40867-4	■	Postlight	BC-EL/O 14W	Standing Blister	4	5 1/2	2	10,000	82	840	9.1	\$1.69	2700
				40778-3	■	Prismatic Postlight	EL/O 14W Prisma	Box	6	5 1/2	2	10,000	82	840	9.1	\$1.69	2700
EnergySaver Universal																	
14	60	SLS	Med.	14691-0	■	SLS Universal Triple Tube	SLS 14W	Box	6	5	2 1/2	12,000	82	860	11.0	\$1.69	2700
20	75	SLS	Med.	13077-3		SLS Universal Triple Tube	SLS 20W	Box	6	5 1/2	2 1/2	15,000	82	1200	11.0	\$2.41	2700
25	100	SLS	Med.	13574-9		SLS Universal Triple Tube	SLS 25W	Box	6	6 1/2	2 1/2	15,000	82	1750	11.0	\$3.01	2700
EnergySaver TuffGuard																	
18	75	T20	Med.	13578-0	■	TuffGuard	EL/O 18W	Box	6	6 1/2	2 1/2	15,000	82	1100	11.0	\$2.17	2700

For the most current product information, go to the e-catalog on www.philips.com
Compact fluorescent symbols and footnotes located on page 61



T16 Postlight Med.

14W SLS Universal Med.

20W SLS Universal Med.

25W SLS Universal Med.

18W TuffGuard T20 Med.

14W D2D Med.

A19 Bug-A-Way Med.

Compact Fluorescent Lamps

EnergySaver Decoratives

Inc. Equiv. Watts	Bulb Watts	Base	Product Number	Symbols, Footnotes	Description	Ordering Code	Pkg. Type	Case Qty.	MOL (In.)	Diam. (In.)	Rated Avg. Life (Hrs.) (230)	CRI	Brightness (Lumens) (231)	Life (Yrs.) (446)	Energy Cost (445)	Light Appear. (CCT)	
EnergySaver Silicone A-Shape																	
9	40	A17	Med.	41504-2	■ †	A17 Silicone Soft White	EL/A T2 SC 9W 6/2	Blister	6	4 1/8	2 1/2	10,000	82	450	9.1	\$1.08	2700
14	60	A17	Med.	41503-4	■ †	A17 Silicone Soft White	EL/A T2 SC 14W 6/2	Blister	6	4 1/8	2 1/2	10,000	82	800	9.1	\$1.69	2700
				43360-7	■ †	A17 Silicone Soft White	EL/A T2 SC 14W 6.5K 2PK	Blister	6	4 1/8	2 1/2	10,000	82	800	9.1	\$1.69	6500
				Cand.	45177-3	■ †	A17 Silicone Soft White	EL/mAT2 SC 14W 2PK	Blister	6	4 1/8	2 1/2	10,000	82	800	9.1	\$1.69

FTC REQUIREMENTS*

For the most current product information, go to the e-catalog on www.philips.com
Compact fluorescent symbols and footnotes located on page 61



Compact Fluorescent Lamps

EnergySaver Base Types and Bulb Shapes

EnergySaver Compact Fluorescent Base Types (Not Actual Sizes)



Med.
Medium



Cand.
Candelabra



GU24

EnergySaver Compact Fluorescent Bulb Shapes (Not Actual Sizes)



EL/mdT2
9W



EL/mdT2
13W



EL/mdT2
18W



EL/mdT2
23W



EL/mdT2
26W



EL/mdT
5W



EL/mdT
32W



EL/dT
42W



EL/mdT
DIM 15W



EL/mdT
DIM 20W



EL/dT
DIM 32W



EL/mdT
GU24



EL/3W



EL/A
FAN



EL/A
SWP




A17
Med.




A17
Cand.




EL/A R20




EL/A R30



EL/A R40



EL/A PAR38




EL/A PAR38
2PC



T16



T20




EL/Can




EL/mCan



EL/A
G25



EL/A G30



EL/A G40



EL/mdT
D2D 14W



EL/A
SWP BAW



SLS
EL/T

Compact Fluorescent Lamps

PL-S and PL-C Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Description	Generic Designation	Pkg. Qty.	MOL (In.)	Rated Avg. Life (Hrs.) (230)	Design Lumens (208)	Brightness (Lumens) (231)	Life (Yrs.) (446)	Energy Cost (445)	Light Appear. (CCT)
-------	------	------	----------------	--------------------	-------------	---------------------	-----------	-----------	------------------------------	---------------------	---------------------------	-------------------	-------------------	---------------------

PL-S (Short) Fluorescent Lamps

FTC REQUIREMENTS*

5	PL-S	G23	14671-2	●	PL-S 5W/827/2P/ALTO	CFT5W/G23/827	10	4 $\frac{1}{2}$	10,000	210	82	250	9.1	\$0.60	2700
			14868-4	●	PL-S 5W/841/2P/ALTO	CFT5W/G23/841	10	4 $\frac{1}{2}$	10,000	210	82	250	9.1	\$0.60	4100
7	PL-S	G23	14871-8	●	PL-S 7W/827/2P/ALTO	CFT7W/G23/827	10	5 $\frac{1}{8}$	10,000	360	82	400	9.1	\$0.84	2700
			14872-6	●	PL-S 7W/835/2P/ALTO	CFT7W/G23/835	10	5 $\frac{1}{8}$	10,000	360	82	400	9.1	\$0.84	3500
			14873-4	●	PL-S 7W/841/2P/ALTO	CFT7W/G23/841	10	5 $\frac{1}{8}$	10,000	360	82	400	9.1	\$0.84	4100
9	PL-S	G23	14867-6	●	PL-S 9W/827/2P/ALTO	CFT9W/G23/827	10	6 $\frac{1}{8}$	10,000	540	82	600	9.1	\$1.08	2700
			14869-2	●	PL-S 9W/835/2P/ALTO	CFT9W/G23/835	10	6 $\frac{1}{8}$	10,000	540	82	600	9.1	\$1.08	3500
			14870-0	●	PL-S 9W/841/2P/ALTO	CFT9W/G23/841	10	6 $\frac{1}{8}$	10,000	540	82	600	9.1	\$1.08	4100
13	PL-S	GX23	14681-1	●	PL-S 13W/827/2P/ALTO	CFT13W/GX23/827	10	7 $\frac{1}{4}$	10,000	740	82	825	9.1	\$1.57	2700
			14683-7	●	PL-S 13W/830/2P/ALTO	CFT13W/GX23/830	10	7 $\frac{1}{4}$	10,000	740	82	825	9.1	\$1.57	3000
			14684-5	●	PL-S 13W/835/2P/ALTO	CFT13W/GX23/835	10	7 $\frac{1}{4}$	10,000	740	82	825	9.1	\$1.57	3500
			14685-2	●	PL-S 13W/841/2P/ALTO	CFT13W/GX23/841	10	7 $\frac{1}{4}$	10,000	740	82	825	9.1	\$1.57	4100
			14687-8	●	PL-S 13W/850/2P/ALTO	CFT13W/GX23/850	10	7 $\frac{1}{4}$	10,000	720	82	825	9.1	\$1.57	5000
			14688-6	●	PL-S 13W/850/2P/ALTO/BULK	CFT13W/GX23/850	50	7 $\frac{1}{4}$	10,000	720	82	825	9.1	\$1.57	5000

PL-C (Cluster) 2-Pin—Energy Advantage

21	PL-C	G24d-3	40976-3		PL-C 26W/830/XEW/ALTO 21W	CFQ26W/G24d/830	10	6 $\frac{1}{8}$	10,000	1375	82	1600	9.1	\$2.53	3000
			40977-1		PL-C 26W/835/XEW/ALTO 21W	CFQ26W/G24d/835	10	6 $\frac{1}{8}$	10,000	1375	82	1600	9.1	\$2.53	3500

PL-C (Cluster) 2-Pin

13	PL-C	GX23-2	38310-9	●	PL-C 13W/827/USA/ALTO	CFQ13W/GX23/827	10	4 $\frac{1}{8}$	10,000	735	82	860	9.1	\$1.57	2700
			38311-7	●	PL-C 13W/830/USA/ALTO	CFQ13W/GX23/830	10	4 $\frac{1}{8}$	10,000	735	82	860	9.1	\$1.57	3000
			38312-5	●	PL-C 13W/835/USA/ALTO	CFQ13W/GX23/835	10	4 $\frac{1}{8}$	10,000	735	82	860	9.1	\$1.57	3500
			38313-3	●	PL-C 13W/841/USA/ALTO	CFQ13W/GX23/841	10	4 $\frac{1}{8}$	10,000	735	82	860	9.1	\$1.57	4100
			G24d-1	38314-1	●	PL-C 13W/827/ALTO	CFQ13W/G24d/827	10	5 $\frac{1}{8}$	10,000	770	82	900	9.1	\$1.57
18	PL-C	G24d-2		38316-6	●	PL-C 18W/827/ALTO	CFQ18W/G24d/827	10	6	10,000	1070	82	1250	9.1	\$2.17
			38317-4	●	PL-C 18W/830/ALTO	CFQ18W/G24d/830	10	6	10,000	1070	82	1250	9.1	\$2.17	3000
			38318-2	●	PL-C 18W/835/ALTO	CFQ18W/G24d/835	10	6	10,000	1070	82	1250	9.1	\$2.17	3500
			38319-0	●	PL-C 18W/841/ALTO	CFQ18W/G24d/841	10	6	10,000	1070	82	1250	9.1	\$2.17	4100
26	PL-C	G24d-3	38321-6	●	PL-C 26W/827/ALTO	CFQ26W/G24d/827	10	6 $\frac{1}{8}$	10,000	1545	82	1800	9.1	\$3.13	2700
			38322-4	●	PL-C 26W/830/ALTO	CFQ26W/G24d/830	10	6 $\frac{1}{8}$	10,000	1545	82	1800	9.1	\$3.13	3000
			38323-2	●	PL-C 26W/835/ALTO	CFQ26W/G24d/835	10	6 $\frac{1}{8}$	10,000	1545	82	1800	9.1	\$3.13	3500
			38324-0	●	PL-C 26W/841/ALTO	CFQ26W/G24d/841	10	6 $\frac{1}{8}$	10,000	1545	82	1800	9.1	\$3.13	4100


PL-C (Cluster) 2-Pin, 15mm Tube Diameter

20	PL-C	GX32d-2	24168-7		PL-C 15mm/22W/827	CFQ20W/GX32d/827	40	6	10,000	995	82	1200	9.1	\$2.41	2700
27	PL-C	GX32d-3	24169-5		PL-C 15mm/28W/827	CFQ27W/GX32d/827	40	6 $\frac{1}{8}$	10,000	1325	82	1600	9.1	\$3.25	2700

For the most current product information, go to the e-catalog on www.philips.com
Compact fluorescent symbols and footnotes located on page 61

Philips PL-S
Limited Warranty Period:
12 months*

* Certain limitations and conditions apply.
See Philips for further warranty details.

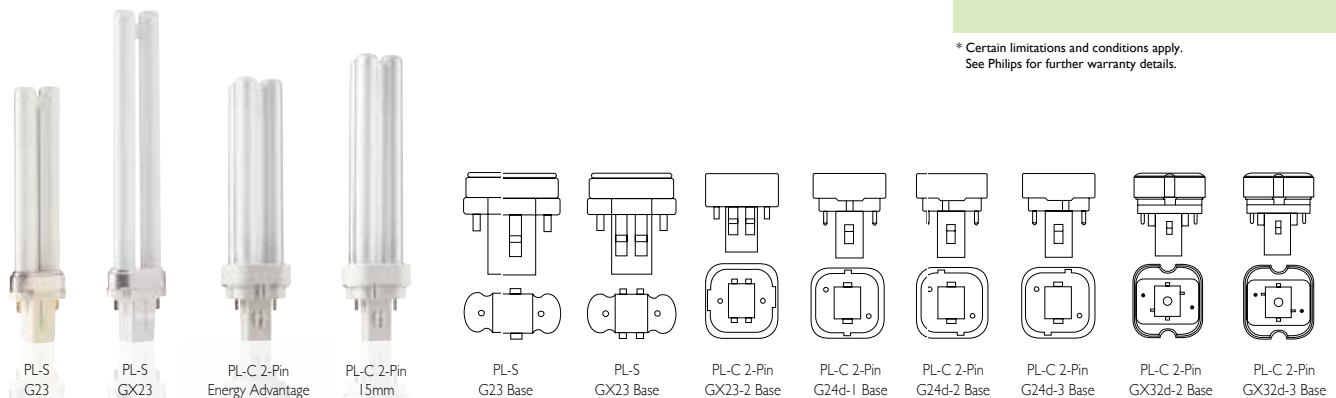

Compact Fluorescent Lamps

PL-C Lamps

Watts	Bulb Base	Product Number	Symbols, Footnotes	Description	Generic Designation	Pkg. Qty.	MOL (In.)	Rated Avg. Life (Hrs.) (230)	Design Lumens (208)	CRI	Brightness (Lumens) (231)	Life (Yrs.) (446)	Energy Cost (445)	Light Appear. (CCT)
-------	-----------	----------------	--------------------	-------------	---------------------	-----------	-----------	------------------------------	---------------------	-----	---------------------------	-------------------	-------------------	---------------------

PL-C (Cluster) 4-Pin, Energy Advantage

FTC REQUIREMENTS*

14	PL-C G24q-2	22034-3	●	PL-C 18W/827/XEW/4P/ALTO 14W	CFQ18W/G24q/827	10	5 1/8	12,000	1010	82	1100	11	\$1.69	2700
		22040-0	●	PL-C 18W/835/XEW/4P/ALTO 14W	CFQ18W/G24q/835	10	5 1/8	12,000	1010	82	1100	11	\$1.69	3500
		22041-8	●	PL-C 18W/841/XEW/4P/ALTO 14W	CFQ18W/G24q/841	10	5 1/8	12,000	1010	82	1100	11	\$1.69	4100
21	PL-C G24q-3	22042-6	●	PL-C 26W/827/XEW/4P/ALTO 21W	CFQ26W/G24q/827	10	6 1/2	12,000	1400	82	1525	11	\$2.53	2700
		22043-4	●	PL-C 26W/830/XEW/4P/ALTO 21	CFQ26W/G24q/830	10	6 1/2	12,000	1400	82	1525	11	\$2.53	3000
		22047-5	●	PL-C 26W/835/XEW/4P/ALTO 21W	CFQ26W/G24q/835	10	6 1/2	12,000	1400	82	1525	11	\$2.53	3500
		22048-3	●	PL-C 26W/841/XEW/4P/ALTO 21W	CFQ26W/G24q/841	10	6 1/2	12,000	1400	82	1525	11	\$2.53	4100

PL-C (Cluster) 4-Pin

13	PL-C G24q-1	38325-7	●	PL-C 13W/827/4P/ALTO	CFQ13W/G24q/827	10	5 3/8	12,000	775	82	900	11	\$1.57	2700
		38326-5	●	PL-C 13W/830/4P/ALTO	CFQ13W/G24q/830	10	5 3/8	12,000	775	82	900	11	\$1.57	3000
		38327-3	●	PL-C 13W/835/4P/ALTO	CFQ13W/G24q/835	10	5 3/8	12,000	775	82	900	11	\$1.57	3500
		38328-1	●	PL-C 13W/841/4P/ALTO	CFQ13W/G24q/841	10	5 3/8	12,000	775	82	900	11	\$1.57	4100
18	PL-C G24q-2	38329-9	●	PL-C 18W/827/4P/ALTO	CFQ18W/G24q/827	10	5 1/8	12,000	1075	82	1250	11	\$2.17	2700
		38330-7	●	PL-C 18W/830/4P/ALTO	CFQ18W/G24q/830	10	5 1/8	12,000	1075	82	1250	11	\$2.17	3000
		38332-3	●	PL-C 18W/835/4P/ALTO	CFQ18W/G24q/835	10	5 1/8	12,000	1075	82	1250	11	\$2.17	3500
		38333-1	●	PL-C 18W/841/4P/ALTO	CFQ18W/G24q/841	10	5 1/8	12,000	1075	82	1250	11	\$2.17	4100
26	PL-C G24q-3	38334-9	●	PL-C 26W/827/4P/ALTO	CFQ26W/G24q/827	10	6 1/2	12,000	1550	82	1800	11	\$3.13	2700
		38335-6	●	PL-C 26W/830/4P/ALTO	CFQ26W/G24q/830	10	6 1/2	12,000	1550	82	1800	11	\$3.13	3000
		38336-4	●	PL-C 26W/835/4P/ALTO	CFQ26W/G24q/835	10	6 1/2	12,000	1550	82	1800	11	\$3.13	3500
		38337-2	●	PL-C 26W/841/4P/ALTO	CFQ26W/G24q/841	10	6 1/2	12,000	1550	82	1800	11	\$3.13	4100

For the most current product information, go to the e-catalog on www.philips.com
Compact fluorescent symbols and footnotes located on page 61

Philips PL-C
Limited Warranty Period:
18 months*

Philips PL-C
Energy Advantage
Limited Warranty Period:
24 months*

* Certain limitations and conditions apply.
See Philips for further warranty details.



PL-C
4-Pin



PL-C 4-Pin
G24q-1 Base



PL-C 4-Pin
G24q-2 Base



PL-C 4-Pin
G24q-3 Base

Compact Fluorescent Lamps

PL-T Lamps

Watts	Bulb Base	Product Number	Symbols, Footnotes	Description	Generic Designation	Pkg. Qty.	MOL (In.)	Rated Avg. Life (Hrs.) (230)	Design Lumens (208)	CRI	Brightness (Lumens) (231)	Life (Yrs.) (446)	Energy Cost (445)	Light Appear. (CCT)
PL-T (Triple) 4-Pin Amalgam, Energy Advantage												FTC REQUIREMENTS*		
21	PL-T GX24q-3	40779-1	●	PL-T 26W/830/XEW/A/4P/ALTO 21W	CFTR26W/GX24q/830	10	5	16,000	1235	82	1400	14.6	\$2.53	3000
27	PL-T GX24q-3	22021-0	●	PL-T 32W/830/XEW/A/4P/ALTO 27W	CFTR32W/GX24q/830	10	5½	16,000	1725	82	1875	14.6	\$3.25	3000
		22022-8	●	PL-T 32W/835/XEW/A/4P/ALTO 27W	CFTR32W/GX24q/835	10	5½	16,000	1725	82	1875	14.6	\$3.25	3500
		22024-4	●	PL-T 32W/841/XEW/A/4P/ALTO 27W	CFTR32W/GX24q/841	10	5½	16,000	1725	82	1875	14.6	\$3.25	4100
33	PL-T GX24q-4	22026-9	●	PL-T 42W/830/XEW/A/4P/ALTO 33W	CFTR42W/GX24q/830	10	6¾	16,000	2400	82	2615	14.6	\$3.97	3000
		22028-5	●	PL-T 42W/835/XEW/A/4P/ALTO 33W	CFTR42W/GX24q/835	10	6¾	16,000	2400	82	2615	14.6	\$3.97	3500
		22029-3	●	PL-T 42W/841/XEW/A/4P/ALTO 33W	CFTR42W/GX24q/841	10	6¾	16,000	2400	82	2615	14.6	\$3.97	4100

PL-T (Triple) 4-Pin Amalgam

18	PL-T GX24q-2	45819-0	●	PL-T 18W/827/A/4P/ALTO	CFTR18W/GX24q/827	10	4¾	16,000	1020	82	1200	14.6	\$2.17	2700
		45821-6	●	PL-T 18W/830/A/4P/ALTO	CFTR18W/GX24q/830	10	4¾	16,000	1020	82	1200	14.6	\$2.17	3000
		45822-4	●	PL-T 18W/835/A/4P/ALTO	CFTR18W/GX24q/835	10	4¾	16,000	1020	82	1200	14.6	\$2.17	3500
		45823-2	●	PL-T 18W/841/A/4P/ALTO	CFTR18W/GX24q/841	10	4¾	16,000	1020	82	1200	14.6	\$2.17	4100
26	PL-T GX24q-3	45824-0	●	PL-T 26W/827/A/4P/ALTO	CFTR26W/GX24q/827	10	5	16,000	1530	82	1800	14.6	\$3.13	2700
		45825-7	●	PL-T 26W/830/A/4P/ALTO	CFTR26W/GX24q/830	10	5	16,000	1530	82	1800	14.6	\$3.13	3000
		45826-5	●	PL-T 26W/835/A/4P/ALTO	CFTR26W/GX24q/835	10	5	16,000	1530	82	1800	14.6	\$3.13	3500
		45827-3	●	PL-T 26W/841/A/4P/ALTO	CFTR26W/GX24q/841	10	5	16,000	1530	82	1800	14.6	\$3.13	4100
32	PL-T GX24q-3	45828-1	●	PL-T 32W/827/A/4P/ALTO	CFTR32W/GX24q/827	10	5½	16,000	2040	82	2400	14.6	\$3.85	2700
		45829-9	●	PL-T 32W/830/A/4P/ALTO	CFTR32W/GX24q/830	10	5½	16,000	2040	82	2400	14.6	\$3.85	3000
		45830-7	●	PL-T 32W/835/A/4P/ALTO	CFTR32W/GX24q/835	10	5½	16,000	2040	82	2400	14.6	\$3.85	3500
		45831-5	●	PL-T 32W/841/A/4P/ALTO	CFTR32W/GX24q/841	10	5½	16,000	2040	82	2400	14.6	\$3.85	4100
42	PL-T GX24q-4	14900-5	●	PL-T 42W/827/A/4P/ALTO	CFTR42W/GX24q/827	10	6¾	16,000	2720	82	3200	14.6	\$5.06	2700
		14901-3	●	PL-T 42W/830/A/4P/ALTO	CFTR42W/GX24q/830	10	6¾	16,000	2720	82	3200	14.6	\$5.06	3000
		14902-1	●	PL-T 42W/835/A/4P/ALTO	CFTR42W/GX24q/835	10	6¾	16,000	2720	82	3200	14.6	\$5.06	3500
		14903-9	●	PL-T 42W/841/A/4P/ALTO	CFTR42W/GX24q/841	10	6¾	16,000	2720	82	3200	14.6	\$5.06	4100
57	PL-T GX24q-5	14631-6	●	PL-T 57W/830/A/4P	CFTR57W/GX24q/830	10	7¾	16,000	3741	82	4300	14.6	\$6.87	3000
		14632-4	●	PL-T 57W/835/A/4P	CFTR57W/GX24q/835	10	7¾	16,000	3741	82	4300	14.6	\$6.87	3500
		14633-2	●	PL-T 57W/841/A/4P	CFTR57W/GX24q/841	10	7¾	16,000	3741	82	4300	14.6	\$6.87	4100

For the most current product information, go to the e-catalog on www.philips.com
Compact fluorescent symbols and footnotes located on page 61

Philips PL-T

Limited Warranty Period:
18 months*

Philips PL-T

Energy Advantage

Limited Warranty Period:
24 months*

* Certain limitations and conditions apply.
See Philips for further warranty details.




PL-T 4-Pin
Energy Advantage




PL-T 4-Pin
Non-Amalgam




PL-T 4-Pin
Amalgam



PL-T 4-Pin
GX24q-2 Base



PL-T 4-Pin
GX24q-3 Base



PL-T 4-Pin
GX24q-4 Base



PL-T 4-Pin
GX24q-5 Base

Compact Fluorescent Lamps

PL-L Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Description	Generic Designation	Pkg. Qty.	MOL (In.)	Rated Avg. Life (Hrs.) (230)	Design Lumens (208)	CRI	Brightness (Lumens) (231)	Life (Yrs.) (446)	Energy Cost (445)	Light Appear. (CCT)
PL-T (Triple) 4-Pin Non-Amalgam												FTC REQUIREMENTS*			
26	PL-T	GX24q-3	43337-5	● † *	PL-T 26W/827/4P/ALTO	CFTR26W/GX24q/827	10	5	16,000	1530	82	1800	14.6	\$3.13	2700
			43338-3	● † *	PL-T 26W/830/4P/ALTO	CFTR26W/GX24q/830	10	5	16,000	1530	82	1800	14.6	\$3.13	3000
			43339-1	● † *	PL-T 26W/835/4P/ALTO	CFTR26W/GX24q/835	10	5	16,000	1530	82	1800	14.6	\$3.13	3500
			43340-9	● † *	PL-T 26W/841/4P/ALTO	CFTR26W/GX24q/841	10	5	16,000	1530	82	1800	14.6	\$3.13	4100
32	PL-T	GX24q-3	43341-7	● † *	PL-T 32W/827/4P/ALTO	CFTR32W/GX24q/827	10	5½	16,000	2040	82	2400	14.6	\$3.85	2700
			43343-3	● † *	PL-T 32W/830/4P/ALTO	CFTR32W/GX24q/830	10	5½	16,000	2040	82	2400	14.6	\$3.85	3000
			43344-1	● † *	PL-T 32W/835/4P/ALTO	CFTR32W/GX24q/835	10	5½	16,000	2040	82	2400	14.6	\$3.85	3500
			43345-8	● † *	PL-T 32W/841/4P/ALTO	CFTR32W/GX24q/841	10	5½	16,000	2040	82	2400	14.6	\$3.85	4100
42	PL-T	GX24q-4	43342-5	● † *	PL-T 42W/827/4P/ALTO	CFTR42W/GX24q/827	10	6¾	16,000	2720	82	3200	14.6	\$5.06	2700
			43346-6	● † *	PL-T 42W/830/4P/ALTO	CFTR42W/GX24q/830	10	6¾	16,000	2720	82	3200	14.6	\$5.06	3000
			43347-4	● † *	PL-T 42W/835/4P/ALTO	CFTR42W/GX24q/835	10	6¾	16,000	2720	82	3200	14.6	\$5.06	3500
			43348-2	● † *	PL-T 42W/841/4P/ALTO	CFTR42W/GX24q/841	10	6¾	16,000	2720	82	3200	14.6	\$5.06	4100

PL-L (Long)—Energy Advantage

25	PL-L	2GI1	20913-0		PL-L 40W/830/XEW/4P/IS 25W	FT40W/2GI1/RS/830	25	22½	24,000	2470	82	2600	21.9	\$3.01	3000
			20914-8		PL-L 40W/835/XEW/4P/IS 25W	FT40W/2GI1/RS/835	25	22½	24,000	2470	82	2600	21.9	\$3.01	3500
			40652-0		PL-L 40W/835/XEW/4P/IS 25W	FT40W/2GI1/RS/835	10	22½	24,000	2470	82	2600	21.9	\$3.01	3500
			20915-5		PL-L 40W/841/XEW/4P/IS 25W	FT40W/2GI1/RS/841	25	22½	24,000	2470	82	2600	21.9	\$3.01	4100

For the most current product information, go to the e-catalog on www.philips.com
Compact fluorescent symbols and footnotes located on page 61

Philips PL-L Standard

Limited Warranty Period:
24 months*

Philips PL-L

Energy Advantage
Limited Warranty Period:
30 months*



PL-L
2GI1

PL-L
2GI1 Base

Compact Fluorescent Lamps

Consumer Lamps

Watts	Bulb Base	Product Number	Symbols, Footnotes	Description	Generic Designation	Pkg. Qty.	MOL (In.)	Rated Avg. Life (Hrs.)(230)	Design Lumens (208)	CRI	Brightness (Lumens) (231)	Life (Yrs.) (446)	Energy Cost (445)	Light Appear. (CCT)
PL-L (Long)											FTC REQUIREMENTS*			
18	PL-L 2G11	34500-9		PL-L 18W/830/4P	FT18W/2G11/830	25	8 $\frac{5}{16}$	15,000	1125	82	1250	13.7	\$2.17	3000
		35932-3		PL-L 18W/835/4P	FT18W/2G11/835	25	8 $\frac{5}{16}$	15,000	1125	82	1250	13.7	\$2.17	3500
		34501-7		PL-L 18W/841/4P	FT18W/2G11/841	25	8 $\frac{5}{16}$	15,000	1125	82	1250	13.7	\$2.17	4100
24	PL-L 2G11	34505-8		PL-L 24W/830/4P	FT24W/2G11/830	25	12 $\frac{1}{16}$	15,000	1620	82	1800	13.7	\$2.89	3000
		35933-1		PL-L 24W/835/4P	FT24W/2G11/835	25	12 $\frac{1}{16}$	15,000	1620	82	1800	13.7	\$2.89	3500
		34508-2		PL-L 24W/841/4P	FT24W/2G11/841	25	12 $\frac{1}{16}$	15,000	1620	82	1800	13.7	\$2.89	4100
36	PL-L 2G11	34511-6		PL-L 36W/830/4P	FT36W/2G11/830	25	16 $\frac{1}{16}$	15,000	2610	82	2900	13.7	\$4.34	3000
		34942-3		PL-L 36W/835/4P	FT36W/2G11/835	25	16 $\frac{1}{16}$	15,000	2610	82	2900	13.7	\$4.34	3500
		34513-2		PL-L 36W/841/4P	FT36W/2G11/841	25	16 $\frac{1}{16}$	15,000	2610	82	2900	13.7	\$4.34	4100
40	PL-L 2G11	30042-6		PL-L 40W/830/4P/RS/IS	FT40W/2G11/RS/830	25	22 $\frac{1}{2}$	20,000	2970	82	3300	18.3	\$4.82	3000
		30043-4		PL-L 40W/835/4P/RS/IS	FT40W/2G11/RS/835	25	22 $\frac{1}{2}$	20,000	2970	82	3300	18.3	\$4.82	3500
		30044-2		PL-L 40W/841/4P/RS/IS	FT40W/2G11/RS/841	25	22 $\frac{1}{2}$	20,000	2970	82	3300	18.3	\$4.82	4100
50	PL-L 2G11	34747-6		PL-L 50W/830/4P/RS	FT50W/2G11/RS/830	25	22 $\frac{1}{2}$	20,000	3870	82	4300	18.3	\$6.02	3000
		34753-4		PL-L 50W/835/4P/RS	FT50W/2G11/RS/835	25	22 $\frac{1}{2}$	20,000	3870	82	4300	18.3	\$6.02	3500
		34770-8		PL-L 50W/841/4P/RS	FT50W/2G11/RS/841	25	22 $\frac{1}{2}$	20,000	3870	82	4300	18.3	\$6.02	4100
55	PL-L 2G11	13844-6		PL-L 55W/950/4P/RS	FT55W/2G11/RS/950	25	21 $\frac{1}{2}$	20,000	3358	91	3650	18.3	\$6.62	5000
80	PL-L 2G11	38698-7		PL-L 80W/835/4P	FT80W/2G11/835	25	22 $\frac{1}{2}$	20,000	5400	82	6000	18.3	\$9.64	3500
		38699-5		PL-L 80W/841/4P	FT80W/2G11/841	25	22 $\frac{1}{2}$	20,000	5400	82	6000	18.3	\$9.64	4100

PL-Q Square Shape—4 Pin

38	PL-Q GR10q	15941-8		PL-Q 38W/827/4P	CFS38W/GR10q/827	10	8 $\frac{5}{8}$	10,000	2395	82	2850	9.1	\$4.58	2700
----	------------	---------	--	-----------------	------------------	----	-----------------	--------	------	----	------	-----	--------	------

Consumer Lamps

7	PL-S G23	23022-7	●	PL-S 7W/827/2P/ALTO	14871-8	6	5 $\frac{1}{2}$	10,000	340	80	400	9.1	\$0.84	2700
9	PL-S G23	23032-6	●	PL-S 9W/827/2P/ALTO	14867-6	6	6 $\frac{1}{2}$	10,000	510	80	600	9.1	\$1.08	2700
13	PL-S GX23	23010-2	●	PL-S 13W/827/2P/ALTO	14681-1	6	7 $\frac{1}{4}$	10,000	675	80	800	9.1	\$1.57	2700
		23012-8	●	PL-S 13W/841/2P/ALTO	14685-2	6	7 $\frac{1}{4}$	10,000	675	80	800	9.1	\$1.57	4100
	PL-C GX23-2	23039-1	●	PL-C 13W/827/2P USA	38310-9	6	4 $\frac{1}{2}$	10,000	730	80	860	9.1	\$1.57	2700
		23040-9	●	PL-C 13W/841/2P USA	38313-3	6	4 $\frac{1}{2}$	10,000	730	80	860	9.1	\$1.57	4100
	PL-C G24q-1	23035-9	●	PL-C 13W/827/4P	38325-7	6	5 $\frac{1}{8}$	10,000	665	80	780	9.1	\$1.57	2700
		23036-7	●	PL-C 13W/841/4P	38328-1	6	5 $\frac{1}{8}$	10,000	665	80	780	9.1	\$1.57	4100
18	PL-C G24q-2	23041-7	●	PL-C 18W/827/4P	38329-9	6	6	10,000	990	80	1150	9.1	\$2.17	2700
	PL-T GX24q-2	45844-8	●	PL-T 18W/827/A/4P/ALTO	45819-0	6	4 $\frac{1}{2}$	12,000	1020	80	1200	9.1	\$2.17	2700
26	PL-C G24q-3	23042-5	●	PL-C 26W/827/4P	38334-9	6	6 $\frac{1}{8}$	10,000	1470	80	1710	9.1	\$3.13	2700
		23044-1	●	PL-C 26W/835/4P	38336-4	6	6 $\frac{1}{8}$	10,000	1470	80	1710	9.1	\$3.13	3500
	PL-T GX24q-3	45845-5	●	PL-T 26W/827/A/4P/ALTO	45824-0	6	5	12,000	1530	80	1800	11.0	\$3.13	2700
		45846-3	●	PL-T 26W/841/A/4P/ALTO	45827-3	6	5	12,000	1530	80	1800	11.0	\$3.13	4100

For the most current product information, go to the e-catalog on www.philips.com
Compact fluorescent symbols and footnotes located on page 61

Philips PL-Q
Limited Warranty Period:
12 months*



* Certain limitations and conditions apply.
See Philips for further warranty details.




Compact Fluorescent Lamps

PL Base Types and Bulb Shapes

PL Base Types (Not Actual Sizes)

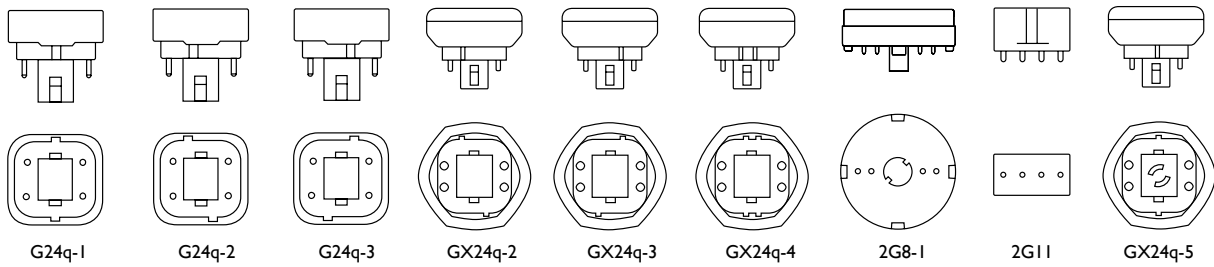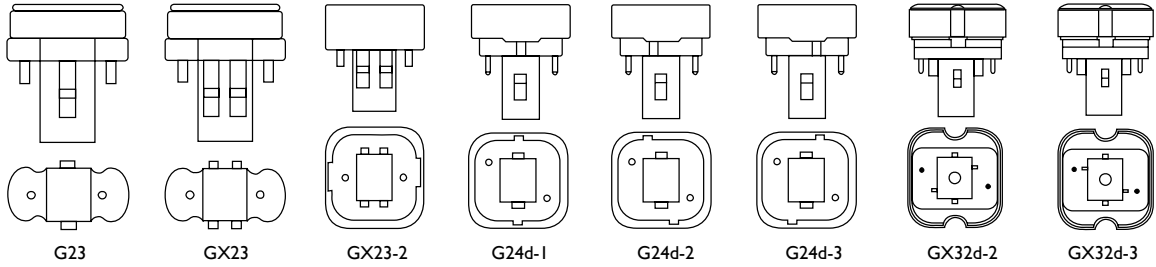

PL Bulb Shapes (Not Actual Sizes)

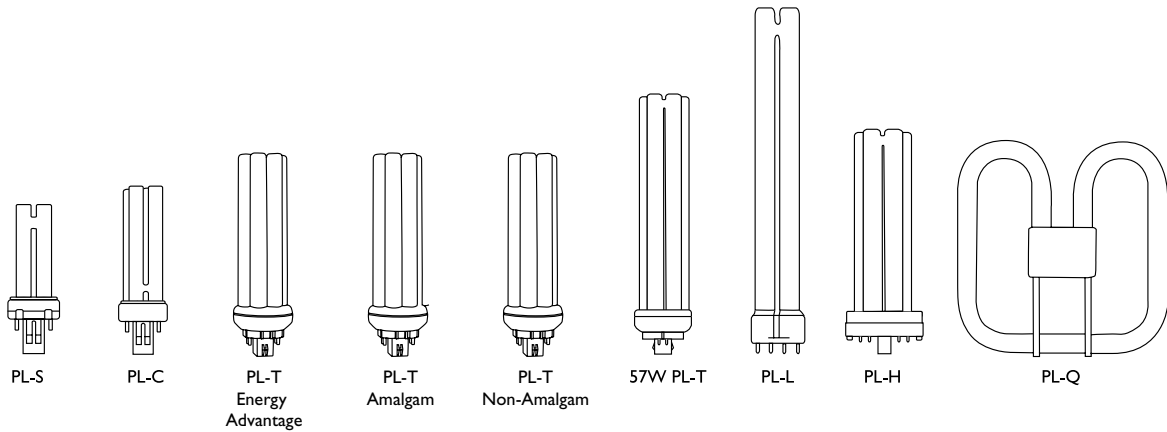

For the most current product information, go to the e-catalog on www.philips.com

□ Exclusive to Philips Lighting North America Corporation

● This lamp is better for the environment because of its reduced mercury content. All Philips ALTO lamps give you end-of-life options, which can simplify and reduce your lamp disposal costs, depending on your state and local regulations

■ ENERGY STAR Bulb: As an ENERGY STAR Partner, Philips has determined that this product meets the ENERGY STAR guidelines for energy efficiency

✕ Orders will be shipped until inventory is depleted; no longer manufactured

©This Bulb Meets US Federal Minimum Efficiency Standard

† New since last printing

◇ Designed for instant start operation

T- ENERGY STAR testing in progress

§ "Made-To-Order". Product is not kept in inventory. Minimum quantities will apply

¥ For more information about FTC requirements please see rule 16 CFR part 305 @ www.ftc/os/2000/02/16cfr305

* Performs more optimally under air flow conditions and horizontal burning operation, compared to Philips PL-T amalgam containing lamps. First choice for short switching cycles, emergency lighting and deep dimming applications.

(208) Design lumens are the approximate lamp lumen output at 40% of the lamp's rated average life. This output is based upon measurements obtained during lamp operation on a reference ballast under standard laboratory conditions.

(230) Average life under specified test conditions with lamps turned off and restarted no more frequently than once every 3 operating hours. Rated Average Life is the length of operation (in hours) at which point 50% of a large sample of lamps will still be operational and 50% will not.

(231) Approximate initial lumens. The lamp lumen output is based upon lamp performance after 100 hours of operating life under standard laboratory conditions.

(445) Estimated energy cost is based on 3 hrs/day, 11¢/kWh. Cost depends on rates and use.

(446) Life in years is based on 3 hrs/day.

Compact Fluorescent Lamps

Cross Reference Guide

Philips	Generic Designation	GE	OSI
PL-S			
PL-S 5W/827	CFT5W/G23/827	F5BX/SPX27	CF5DS/827
PL-S 7W/827	CFT7W/G23/827	F7BX/SPX27	CF7DS/827
PL-S 7W/835	CFT7W/G23/835	F7BX/SPX35	CF7DS/835
PL-S 7W/841	CFT7W/G23/841	F7BX/SPX41	CF7DS/841
PL-S 7W/850	CFT7W/G23/850	F7BX/SPX50	CF7DS/850
PL-S 9W/827	CFT9W/G23/827	F9BX/SPX27	CF9DS/827
PL-S 9W/835	CFT9W/G23/835	F9BX/SPX35	CF9DS/835
PL-S 9W/841	CFT9W/G23/841	F9BX/SPX41	CF9DS/841
PL-S 9W/850	CFT9W/G23/850	F9BX/SPX50	CF9DS/850
PL-S 13W/827	CFT13W/GX23/827	F13BX/SPX27	CF13DS/827
PL-S 13W/830	CFT13W/GX23/830	F13BX/SPX30	CF13DS/830
PL-S 13W/835	CFT13W/GX23/835	F13BX/SPX35	CF13DS/835
PL-S 13W/841	CFT13W/GX23/841	F13BX/SPX41	CF13DS/841
PL-S 13W/850	CFT13W/GX23/850	F13BX/SPX50	CF13DS/850

PL-C 2-PIN			
PL-C 13W/827/USA/ALTO	CFQ13W/GX23/827	F13DBX23T4/SPX27	CFI3DD/827
PL-C 13W/830/USA/ALTO	CFQ13W/GX23/830	F13DBX23T4/SPX30	CFI3DD/830
PL-C 13W/835/USA/ALTO	CFQ13W/GX23/835	F13DBX23T4/SPX35	CFI3DD/835
PL-C 13W/841/USA/ALTO	CFQ13W/GX23/841	F13DBX23T4/SPX41	CFI3DD/841
PL-C 13W/827/ALTO	CFQ13W/G24d/827	F13DBXT4/SPX27	—
PL-C 13W/830/ALTO	CFQ13W/G24d/830	F13DBXT4/SPX30	—
PL-C 18W/827/ALTO	CFQ18W/G24d/827	F18DBXT4/SPX27	CFI8DD/827
PL-C 18W/830/ALTO	CFQ18W/G24d/830	F18DBXT4/SPX30	CFI8DD/830
PL-C 18W/835/ALTO	CFQ18W/G24d/835	F18DBXT4/SPX35	CFI8DD/835
PL-C 18W/841/ALTO	CFQ18W/G24d/841	F18DBXT4/SPX41	CFI8DD/841
PL-C 26W/827/ALTO	CFQ26W/G24d/827	F26DBXT4/SPX27	CFI26DD/827
PL-C 26W/830/ALTO	CFQ26W/G24d/830	F26DBXT4/SPX30	CFI26DD/830
PL-C 26W/835/ALTO	CFQ26W/G24d/835	F26DBXT4/SPX35	CFI26DD/835
PL-C 26W/841/ALTO	CFQ26W/G24d/841	F26DBXT4/SPX41	CFI26DD/841

PL-C 2-PIN 15MM			
PL-C 15MM/22W/827	CFQ20W/GX32d/827	—	—
PL-C 15MM/28W/827	CFQ27W/GX32d/827	—	—

PL-C 4-PIN			
PL-C 13W/827/4P/ALTO	CFQ13W/G24q/827	F13DBX/SPX27/4P	CFI3DD/E/827
PL-C 13W/830/4P/ALTO	CFQ13W/G24q/830	F13DBX/SPX30/4P	CFI3DD/E/830
PL-C 13W/835/4P/ALTO	CFQ13W/G24q/835	F13DBX/SPX35/4P	CFI3DD/E/835
PL-C 13W/841/4P/ALTO	CFQ13W/G24q/841	F13DBX/SPX41/4P	CFI3DD/E/841
PL-C 18W/827/4P/ALTO	CFQ18W/G24q/827	F18DBX/SPX27/4P	CFI8DD/E/827
PL-C 18W/830/4P/ALTO	CFQ18W/G24q/830	F18DBX/SPX30/4P	CFI8DD/E/830
PL-C 18W/835/4P/ALTO	CFQ18W/G24q/835	F18DBX/SPX35/4P	CFI8DD/E/835
PL-C 18W/841/4P/ALTO	CFQ18W/G24q/841	F18DBX/SPX41/4P	CFI8DD/E/841
PL-C 26W/827/4P/ALTO	CFQ26W/G24q/827	F26DBX/SPX27/4P	CFI26DD/E/827
PL-C 26W/830/4P/ALTO	CFQ26W/G24q/830	F26DBX/SPX30/4P	CFI26DD/E/830
PL-C 26W/835/4P/ALTO	CFQ26W/G24q/835	F26DBX/SPX35/4P	CFI26DD/E/835
PL-C 26W/841/4P/ALTO	CFQ26W/G24q/841	F26DBX/SPX41/4P	CFI26DD/E/841

Compact Fluorescent Lamps

Cross Reference Guide

Philips	Generic Designation	GE	OSI
PL-L			
PL-L 18W/830	FT18W/2G11/830	F18BX/SPX30	FT18DL/830
PL-L 18W/835	FT18W/2G11/835	F18BX/SPX35	FT18DL/835
PL-L 18W/841	FT18W/2G11/841	F18BX/SPX41	FT18DL/841
PL-L 18W/830	FT18W/2G11/RS/830	F18BX/SPX30/RS	FT18DL/830/RS
PL-L 18W/835	FT18W/2G11/RS/835	F18BX/SPX35/RS	FT18DL/835/RS
PL-L 18W/841	FT18W/2G11/RS/841	F18BX/SPX41/RS	FT18DL/841/RS
PL-L 24W/830	FT24W/2G11/830	F27/24BX/SPX30	FT24DL/830
PL-L 24W/835	FT24W/2G11/835	F27/24BX/SPX35	FT24DL/835
PL-L 24W/841	FT24W/2G11/841	F27/24BX/SPX41	FT24DL/841
PL-L 36W/830	FT36W/2G11/830	F39/36BX/SPX30	FT36DL/830
PL-L 36W/835	FT36W/2G11/835	F39/36BX/SPX35	FT36DL/835
PL-L 36W/841	FT36W/2G11/841	F39/36BX/SPX41	FT36DL/841
PL-L 40W/830/RS/IS	FT40W/2G11/RS/830	F40/30BX/SPX30	FT40DL/830/RS
PL-L 40W/835/RS/IS	FT40W/2G11/RS/835	F40/30BX/SPX35	FT40DL/835/RS
PL-L 40W/841/RS/IS	FT40W/2G11/RS/841	F40/30BX/SPX41	FT40DL/841/RS
PL-L 50W/830/RS	FT50W/2G11/RS/830	F50BX/SPX30/RS	—
PL-L 50W/835/RS	FT50W/2G11/RS/835	F50BX/SPX35/RS	—
PL-L 50W/841/RS	FT50W/2G11/RS/841	F50BX/SPX41/RS	—
PL-L 80W/830	FT80W/2G11/830	—	FT80DL/830
PL-L 80W/835	FT80W/2G11/835	—	FT80DL/835
PL-L 80W/841	FT80W/2G11/841	—	FT80DL/841

PL-T 4-PIN			
PL-T 18W/827/4P/ALTO	CFTR18W/GX24q/827	F18TBX/SPX27/A/4P	CF18DT/E/IN/827
PL-T 18W/830/4P/ALTO	CFTR18W/GX24q/830	F18TBX/SPX30/A/4P	CF18DT/E/IN/830
PL-T 18W/835/4P/ALTO	CFTR18W/GX24q/835	F18TBX/SPX35/A/4P	CF18DT/E/IN/835



















EL			
EL/mdT 5W	—	—	—
EL/mdT 9W T2	—	FLE10HT3/2/827	—
EL/mdT 11W	—	—	—
EL/mdT2 13W	—	FLE13HT2/2/827	CF13EL/MINI/827
EL/mdT2 13W 3.5K	—	—	CF13EL/MINI/830
EL/mdT2 13W 4.1K	—	—	CF13EL/MINI/841
EL/mdT2 13W 5K	—	—	CF13EL/MINI/850/BL
EL/mdT2 18W	—	FLE20HT3/2/827	CF19EL/MINI/827
EL/mdT2 23W	—	FLE23HT3/2/XL827	CF23EL/MINI/827
EL/mdT 27W	—	—	—
EL/mdT 27W 4K	—	—	—
EL/mdT 27W 5K	—	—	—
EL/mdT2 26W	—	FLE26HT3/2/XL827	—
EL/mdT2 26W 4.1K	—	FLE26HT3/2/841	—
EL/mdT2 26W 5k	—	FLE26HT3/2/6STP	—
EL/mdT 32W	—	FLE29HLX/2XL/827	CF30EL/TWIST/827
EL/mdT 32W 3K	—	—	CF30EL/MINI/835/DAY/B
EL/mdT D2D 14W	—	—	—
EL/dT 42W	—	FLE42HLX/2/XL827	CF40EL/TWIST/827
EL/mdT 13W GU24	—	FLE15HT3/2GU24CD	CF13EL/GU24/827/BL
EL/mdT 13W GU24 4.1K	—	—	—
EL/mdT 18W GU24	—	FLE20HT3/2GU24CD	—
EL/mdT 18W GU24 4.1K	—	—	—
EL/mdT 23W GU24	—	FLE26HT3/2GU24CD	CF23EL/GU24/827/BL
EL/mdT 23W GU24 4.1K	—	—	—

Compact Fluorescent Lamps

Cross Reference Guide

Philips	Generic Designation	GE	OSI
EL			
EL/mCan T2 5W	—	FLE5/2/CAC/827	CF4EL/B15/C/827
EL/Can T2 5W	—	FLE5/2/CAM/827	CF7EL/B15/827
EL/mCan T2 9W	—	FLE9/2/CAC/827	CF9EL/B14/C/830/ADP/BL2
EL/Can T2 9W	—	FLE9/2/CAM/827	—
EL/A FAN 5W	—	—	—
EL/A FAN 9W	—	FLE11/2/A17XL/CD	—
EL/A G18 9W	—	—	—
EL/A G25 T3 9W	—	FLE11/2/G25XL	CF9EL/G25/827
EL/A G30 16W	—	—	—
EL/A G40 23W	—	—	—
EL/A SWP 9W	—	FLE11/2/A17XL/CD	CF9EL/A19/827
EL/A SWP 14W	—	FLE15/2/A19XL	CF14EL/A19/827
EL/A SWP 14W BAW	—	FLE11/2TC14BUGCD	CF14EL/A19/Y/BL
EL/A SWP 20W	—	FLE20/2/A19XL	—
EL/O 14W	—	FLE14/2/TC16SWCD	CF14EL/T20/830
EL/A PAR38 23W 2pc	—	FLE26/2/PAR38/XL	CF23EL/PAR38/GL/827
EL/A R20 14W	—	FLE11/2/R20XL827	CF14EL/R20/827
EL/A 15W R30	—	FLE15/2/R30XL827	CF16EL/BR30/827
EL/A R40 23W	—	FLE26/2/R40XL827	CF20EL/BR40/827
EL/A PAR38 23W	—	FLE26/2PAR38XCD	CF23EL/PAR38/827
EL/A R30 EDIM 16W	—	FLE15/2DVR30SWCD	CF15EL/BR30/DIM/827
EL/A R40 EDIM 20W	—	FLE26/2/DV/R40	—
EL/A PAR38 EDIM 20W	—	—	—
Silicone			
EL/A T2 SC 14W	—	—	—
EL/A T2 SC 9W	—	—	—
EL/A T2 SC 5W	—	—	—
EL/mA T2 SC 9W	—	—	—
EL/O SC 18W	—	—	—
EL/mCan T2 SC 5W	—	—	—
EL/Can T2 SC 5W	—	—	—
EL/mCan T2 SC 9W	—	—	—
EL/Can T2 SC 9W	—	—	—
EL/mG16.5 T2 SC 8W	—	—	—
EL/G16.5 T2 SC 8W	—	—	—
Universal			
Universal 14W ALTO	—	—	—
Universal 20W ALTO	—	—	—
Universal 25W ALTO	—	—	—
Helix Twister			
Helix Twister EL/3W 11-23-34	—	FLE32HT3/2D3/BX	CF28EL/3WAY/TWIST/827
Two Piece Circline			
32W Two Piece Circline	—	FEA30CIR/SW/CD	—
40W Two Piece Circline	—	—	—
Genie Pro Pack 6PK			
14W Genie Pro Pack 6PK	—	FLE14TBX/2/SW/CD	—
18W Genie Pro Pack 6PK	—	—	—

Contents

	Mini MasterColor Elite CDM Lamps Page 68		Mini MasterColor CDM Lamps Page 68		MasterColor Elite CDM Lamps Page 68
	MasterColor CDM Lamps Page 68		MasterColor CDM Elite Medium Watt Lamps Page 69		MasterColor CDM Tubular Double-Ended Lamps Page 69
	MasterColor Integrated PAR Lamps Page 70		MasterColor CDM Tubular Single-Ended Lamps Page 69		MasterColor CDM R111 Lamps Page 70
	MasterColor Elite CDM RM Lamps Page 70		MasterColor CDM PAR Page 71		MasterColor CDM Lamps Page 72
	CosmoWhite Lamps Page 73		Energy Adv. CDM Lamps with AllStart Technology Page 73		Metal Halide Lamps Page 74
	High Pressure Sodium Lamps Page 79		Low Pressure Sodium Lamps Page 81		Mercury Vapor Lamps Page 82



Upgrade to a better white light—Philips High Intensity Discharge lighting solutions.







A new age in outdoor lighting

Lighting plays an important role in transforming the look of an outdoor space. Whether you are looking to create a unique identity for your city, add a sense of security to an outdoor space, or light a local sports stadium, Philips has a solution for you.

Philips MasterColor CDM Elite MW Lamps combine high efficacy with excellent quality white light and long, stable lifetime performance. This lamp is designed with a new socket allowing for more flexible use and enhanced optical efficiency.

Philips Energy Advantage CDM with AllStart Technology is a high-efficiency CDM lighting retrofit solution for existing quartz metal halide systems that provides energy savings without compromising light quality.

MasterColor Elite Ceramic Metal Halide Tubular T6 100W Lamp gives a unique combination of unbeatable light quality and consistent performance over lifetime. This is a compact, energy efficient lamp that provides crisp, sparkling white light.

Current Product	Philips Upgrade Product	Benefit	Page
 400W Metal Halide (Quartz Probe Start) (450W System)	 MasterColor CDM Elite MW 210W (225W System)	<ul style="list-style-type: none"> • Approximately 50% in total system energy savings* • 20% longer rated average life (24K hours versus 20K hours) • Better CRI and color consistency than standard quartz metal halide 	69
 175W/250W/400W Metal Halide (Quartz Probe or Pulse Start) Lamp	 145W/205W/330W Energy Advantage CDM with AllStart Technology Lamp	<ul style="list-style-type: none"> • Up to 18% energy savings with a simple lamp change** • Longer rated average life[‡] • Excellent CRI and color consistency 	74
 150W MasterColor Ceramic Metal Halide Tubular T6 Lamp	 MasterColor Elite Ceramic Metal Halide Tubular T6 Lamp 100W	<ul style="list-style-type: none"> • Approximately 33% in total system energy savings[†] • 25% longer rated average life (15K hours versus 12K hours) • Excellent lumen maintenance with 90 CRI 	68

* 450W - 225W = 225W / 450W = 50%

** 145W CDM lamp with AllStart Technology compared to 175W QMH, 205W CDM with AllStart Technology compared to 250W QMH, 330W CDM with AllStart Technology compared to 400W QMH

‡ 10,000 hours longer in vertical position and 12,500 hours longer in horizontal position for 145W and 205W lamps compared to 175W and 250W standard Probe Start QMH lamps, 4000 hours more for the 330W compared to 400W standard Probe Start QMH lamps.

† 100W vs. 150W

High Intensity Discharge Lamps

MasterColor Ceramic Metal Halide Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Ordering Code	ANSI Code	Pkg. Qty.	Description (401, 407)	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.) (351)	Approx. Initial Lumens (352)	Approx. Mean Lumens (353)	CRI	CCT (K)
-------	------	------	----------------	--------------------	---------------	-----------	-----------	------------------------	-----------	-----------	------------------------------	------------------------------	---------------------------	-----	---------

Mini MasterColor Evolution Ceramic Metal Halide Tubular Single-Ended GU6.5 Lamps (391, 392, 396, 397)

Enclosed luminaires only; lifetime color stability within ±200K

20	T4	GU6.5	43305-2	★	CDM-Tm Evolution Mini 20W/930 GU6.5	C156/E	12	G, Clear, FadeBlock	1 1/8	2 1/8	20,000	2050	1640	90	3000
----	----	-------	---------	---	-------------------------------------	--------	----	---------------------	-------	-------	--------	------	------	----	------

Mini MasterColor ELITE Ceramic Metal Halide Tubular Single-Ended GU6.5 Lamps (391, 392, 396, 397)

Enclosed luminaires only; lifetime color stability within ±200K

20	T4	GU6.5	40850-0	★	CDM20/TM/830/ GU6.5 ELITE	C156/E	12	G, Clear, FadeBlock	1 1/8	2 1/8	15,000	1800	1550	85	3000
39	T4	GU6.5	41879-8	★†	CDM35/TM/930/ GU6.5 ELITE	C130/E	12	G, Clear, FadeBlock	1 1/8	2 1/8	15,000	3900	3300	90	3000

Mini MasterColor Ceramic Metal Halide Tubular Single-Ended T3.5 Lamps (391, 392, 396, 397)

Enclosed luminaires only; lifetime color stability within ±200K

22	T3.5	PGJ5	14040-0	★	CDM20/TM/830	C175/E	12	G, Clear, FadeBlock	7/8	1 1/4	12,000	1650	1155	85	3000
39	T3.5	PGJ5	21139-1	★	CDM35/TM/930	C179/E	12	G, Clear, FadeBlock	7/8	1 1/4	12,000	3000	2400	90	3000

MasterColor Evolution Ceramic Metal Halide Tubular Single-Ended T4 Lamps (391, 392, 396, 397)

For use on Thermally Protected Electronic Ballasts Only

20	T4	G8.5	42879-7	★	CDM Evolution20/TC/930	C156/E	12	G, Clear, FadeBlock	2	3 1/2	20,000	2050	1640	90	3000
39	T4	G8.5	42790-6	★	CDM Evolution35/TC/930	C130/E	12	G, Clear, FadeBlock	2	3 1/2	20,000	4400	3520	90	3000

MasterColor Elite Ceramic Metal Halide Tubular Single-Ended T4 Lamps (391, 392, 396, 397)*

20	T4	G8.5	41046-4	★	CDM Elite 20/TC/830	C156/E	12	G, Clear, FadeBlock	2	3 1/2	15,000	1800	1550	85	3000
39	T4	G8.5	40916-9	★	CDM Elite 35/TC/930	C130/E	12	G, Clear, FadeBlock	2	3 1/2	15,000	4000	3500	90	3000
70	T4	G8.5	40917-7	★	CDM Elite 70/TC/930	C139/E	12	G, Clear, FadeBlock	2	3 1/2	15,000	7650	6700	90	3000

MasterColor Ceramic Metal Halide Tubular Single-Ended T4 Lamps (391, 392, 396, 397)

Enclosed luminaires only; lifetime color stability within ±200K

39	T4	G8.5	37372-0	★	CDM35/TC/830	C130/E	12	G, Clear, FadeBlock	2	3 1/2	12,000	3300	2300	81	3000
			20883-5	★	CDM35/TC/842	C130/E	12	G, Clear, FadeBlock	2	3 1/2	12,000	3300	2640	85	4200
70	T4	G8.5	37373-8	★	CDM70/TC/830	C139/E	12	G, Clear, FadeBlock	2	3 1/2	12,000	6400	4500	83	3000
			20885-0	★	CDM70/TC/942	C139/E	12	G, Clear, FadeBlock	2	3 1/2	12,000	5900	3840	90	4200

MasterColor Evolution Ceramic Metal Halide Tubular Single-Ended T6 Lamps (391, 392, 396, 397)

For use on Thermally Protected Electronic Ballasts Only

20	T6	G12	42878-9	★	CDM Evolution20/T6/930	C156/E	12	G, Clear, FadeBlock	2 1/2	3 3/8	20,000	2050	1640	90	3000
39	T6	G12	42791-4	★	CDM Evolution35/T6/930	C130/E	12	G, Clear, FadeBlock	2 1/2	3 3/8	20,000	4400	3520	90	3000

MasterColor Elite Ceramic Metal Halide Tubular Single-Ended T6 Lamps (391, 392, 396, 397)

Enclosed luminaires only; lifetime color stability within ±200K

20	T6	G12	41047-2	★	CDM Elite 20/T6/830	C156/E	12	G, Clear, FadeBlock	2 1/2	3 3/8	15,000	1800	1550	85	3000
39	T6	G12	40914-4	★	CDM Elite 35/T6/930	C130/E	12	G, Clear, FadeBlock	2 1/2	3 3/8	15,000	4000	3500	90	3000
70	T6	G12	40915-1	★	CDM Elite 70/T6/930	C139/E	12	G, Clear, FadeBlock	2 1/2	3 3/8	15,000	7650	6700	90	3000
			41899-5	★	CDM Elite70/T6/942	C139/E	12	G, Clear, FadeBlock	2 1/2	3 3/8	15,000	7500	6600	90	4200
100	T6	G12	40829-4	★	CDM Elite 100/T6/930	C191/E	12	G, Clear, FadeBlock	2 1/2	4 1/2	15,000	11,000	9680	90	3000

For the most current product information, go to the e-catalog on www.philips.com
HID symbols and footnotes located on page 84



High Intensity Discharge Lamps

MasterColor Ceramic Metal Halide Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Ordering Code	ANSI Code	Ballast Ref. or MBCP ¹	Pkg. Qty.‡	Description (401, 407)	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.)(351)	Approx. Initial Lumens(352)	Approx. Mean Lumens(353)	CRI	CCT (K)
-------	------	------	----------------	--------------------	---------------	-----------	-----------------------------------	------------	------------------------	-----------	-----------	-----------------------------	-----------------------------	--------------------------	-----	---------

MasterColor Ceramic Metal Halide Tubular Single-Ended T6 Lamps (391, 392, 396, 397)

Enclosed luminaires only; lifetime color stability within ±200K

39	T6	G12	22328-9	★	CDM35/T6/830	C130/E	12	G, Clear, FadeBlock	2 ⁷ / ₃₂	3 ¹ / ₁₆	12,000	3300	2600	81	3000
			20886-8	★	CDM35/T6/842	C130/E	12	G, Clear, FadeBlock	2 ⁷ / ₃₂	3 ¹ / ₁₆	12,000	3300	2800	84	4200
70	T6	G12	22337-0	★	CDM70/T6/830	C139/E	12	G, Clear, FadeBlock	2 ⁷ / ₃₂	3 ¹ / ₁₆	12,000	6600	4950	81	3000
			28137-8	★	CDM70/T6/942	C139/E	12	G, Clear, FadeBlock	2 ⁷ / ₃₂	3 ¹ / ₁₆	12,000	6600	4620	92	4200
150	T6	G12	23272-8	★	CDM150/T6/830	C142/E	12	G, Clear, FadeBlock, also ANSI M102	2 ⁷ / ₃₂	4 ¹ / ₃₂	12,000	14,000	9800	85	3000
			37369-6	★	CDM150/T6/942	C142/E	12	G, Clear, FadeBlock, also ANSI M102	2 ⁷ / ₃₂	4 ¹ / ₃₂	12,000	12,700	8900	96	4200

MasterColor CDM Elite MW (Medium Watt) Ceramic Metal Halide Tubular Single-Ended T9 Lamps (391, 392, 396, 397)

Enclosed luminaires only

210	T9	PGZ18	22062-4	☐★	CDM EliteMW 210/T9/930/U/E	C183/E	12	G, Clear, Fadeblock	3 ¹ / ₂	7 ¹ / ₂	30,000	24,200	21,735	90	3000
			22063-2	☐★	CDM EliteMW 210/T9/942/U/E	C183/E	12	G, Clear, Fadeblock	3 ¹ / ₂	7 ¹ / ₂	30,000	23,100	20,470	90	4200
315	T9	PGZ18	21831-3	☐★	CDM EliteMW 315/T9/930/U/E	C182/E	12	G, Clear, Fadeblock	3 ¹ / ₂	7 ¹ / ₂	30,000	37,800	34,700	90	3000
			22064-0	☐★	CDM EliteMW 315/T9/942/U/E	C182/E	12	G, Clear, Fadeblock	3 ¹ / ₂	7 ¹ / ₂	30,000	36,200	32,600	90	4200

MasterColor CDM Elite MW (Medium Watt) Ceramic Metal Halide Tubular Single-Ended T12 Lamps (391, 392, 396, 397)

Open or Enclosed luminaires; lifetime color stability within ±200K*

210	T12	PGZX18	23806-3	☐★	CDM EliteMW 210/T12/930/U/O	C183/O	12	G, Clear, Fadeblock	3 ¹ / ₂	7 ¹ / ₂	30,000	23,100	20,700	90	3000
			23808-9	☐★	CDM EliteMW 210/T12/942/U/O	C183/O	12	G, Clear, Fadeblock	3 ¹ / ₂	7 ¹ / ₂	30,000	22,100	19,900	90	4200
315	T12	PGZX18	23807-1	☐★	CDM EliteMW 315/T12/930/U/O	C182/O	12	G, Clear, Fadeblock	3 ¹ / ₂	7 ¹ / ₂	30,000	36,200	32,500	90	3000
			23809-7	☐★	CDM EliteMW 315/T12/942/U/O	C182/O	12	G, Clear, Fadeblock	3 ¹ / ₂	7 ¹ / ₂	30,000	34,700	31,200	90	4200

MasterColor CDM Elite MW (Medium Watt) Ceramic Metal Halide Tubular Single-Ended Mogul Base Lamps (391, 392, 396, 397)


Open or Enclosed luminaires; lifetime color stability within ±200K*

210	ED28	Mog.	42705-4	☐★	CDM210/U/O/4K ED28 12PK	C183/O	12	G, Clear, Fadeblock	5	8 ¹ / ₂	30,000	22,800	20,500	92	4200
			42773-2	☐★	CDM210/C/U/O/4K ED28 12PK	C183/O	12	G, Clear, Fadeblock	5	8 ¹ / ₂	30,000	21,210	18,030	92	4200
315	ED37	Mog.	42704-7	☐★	CDM315/U/O/4K ED37 6PK	C182/O	12	G, Clear, Fadeblock	3 ¹ / ₂	11 ¹ / ₂	30,000	34,300	30,780	93	4200
			42772-4	☐★	CDM315/C/U/O/4K ED37 6PK	C182/O	12	G, Clear, Fadeblock	3 ¹ / ₂	11 ¹ / ₂	30,000	32,500	26,170	93	4200

For the most current product information, go to the e-catalog on www.philips.com
HID symbols and footnotes located on page 84



Maintenance Curve Philips MasterColor Elite MW 315W Lamps

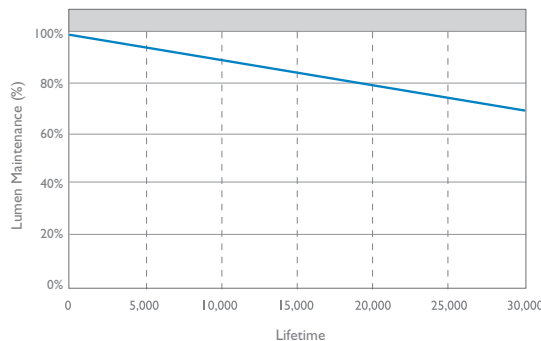

High Intensity Discharge Lamps

MasterColor Ceramic Metal Halide Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Ordering Code	ANSI Code Ballast Ref. or MBCP ¹⁾	Pkg. Qty.‡	Description(401, 407)	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.)(351)	Approx. Initial Lumens(352)	Approx. Mean Lumens(353)	CRI	CCT (K)
-------	------	------	----------------	--------------------	---------------	--	------------	-----------------------	-----------	-----------	-----------------------------	-----------------------------	--------------------------	-----	---------

MasterColor Ceramic Metal Halide Tubular Double-Ended Lamps (374, 391, 392, 396)

Double-Ended TD6 & TD7 Style; enclosed luminaires only; lifetime color stability within ±200K

70	TD6	RX7s	23160-5	★	CDM70/TD/830	CI39/C85/E	12	G, Clear, FadeBlock, Hor. ± 45°	2¼	4¼	15,000	6500	5200	82	3000
----	-----	------	---------	---	--------------	------------	----	---------------------------------	----	----	--------	------	------	----	------

MasterColor Integrated PAR Lamps (396, 406)

These lamps may be used in open fixtures; do not use in totally enclosed recessed fixtures

25	PAR38	Med.	14477-4	☐★●	CDM-i25W/830/ PAR38/10/ALTO	MBCP = 26,000	6	G, PAR Spot 10°	—	5½	15,000	1450	1015	87	3000
			14478-2	☐★●	CDM-i25W/830/ PAR38/25/ALTO	MBCP = 5600	6	G, PAR Flood 25°	—	5½	15,000	1450	1015	87	3000
			14479-0	☐★●	CDM-i25W/830/ PAR38/40/ALTO	MBCP = 2100	6	G, PAR W. Flood 40°	—	5½	15,000	1450	1015	87	3000

Protected MasterColor Ceramic Metal Halide R111 Lamps (391, 392, 396, 397)

Open or Enclosed luminaires; lifetime color stability within ±200K

39	R111	GX8.5	43072-8	☐★	MASTERC CDM-R111 Elite 35W/930 10D	CI30/O MBCP=36,000	6	G, R111, Spot 10°	—	3¾	12,000	1450	1200	90	3000
			43073-6	☐★	MASTERC CDM-R111 Elite 35W/930 24D	CI30/O MBCP=8500	6	G, R111, N. Flood 24°	—	3¾	12,000	1800	1500	90	3000
			43074-4	☐★	MASTERC CDM-R111 Elite 35W/930 40D	CI30/O MBCP=4500	6	G, R111, Flood 40°	—	3¾	12,000	1800	1500	90	3000
70	R111	GX8.5	43075-1	☐★	MASTERC CDM-R111 Elite 70W/930 10D	CI39/O MBCP=61,000	6	G, R111, Spot 10°	—	3¾	12,000	2900	2400	92	3000
			43076-9	☐★	MASTERC CDM-R111 Elite 70W/930 24D	CI39/O MBCP=16,000	6	G, R111, N. Flood 24°	—	3¾	12,000	3700	3100	92	3000

Protected MasterColor Elite Ceramic Metal Halide MRI6 Lamps (391, 392, 396, 397)

Open or Enclosed luminaires; lifetime color stability within ±200K

20	MR16	GX10	42165-1	★	CDM-MR16/20W/ 830/10D ELITE	CI56/O MBCP=13,500	12	G, MR16 Spot 10°	—	2¾	15,000	1050	880	85	3000
			42166-9	★	CDM-MR16/20W/ 830/25D ELITE	CI56/O MBCP=4500	12	G, MR16 Flood 25°	—	2¾	15,000	1050	880	85	3000
			42167-7	★	CDM-MR16/20W/ 830/40D ELITE	CI56/O MBCP=2100	12	G, MR16 W. Flood 40°	—	2¾	15,000	1050	880	85	3000
39	MR16	GX10	41893-9	★	CDM-MR16/35W/ 930/10D ELITE	CI30/O MBCP=18,000	12	G, MR16 Spot 10°	—	2¾	15,000	2400	2200	90	3000
			41894-7	★	CDM-MR16/35W/ 930/25D ELITE	CI30/O MBCP=8000	12	G, MR16 Flood 25°	—	2¾	15,000	2400	2200	90	3000
			41895-3	★	CDM-MR16/35W/ 930/40D ELITE	CI30/O MBCP=3900	12	G, MR16 W. Flood 40°	—	2¾	15,000	2400	2200	90	3000

For the most current product information, go to the e-catalog on www.philips.com
HID symbols and footnotes located on page 84



High Intensity Discharge Lamps

MasterColor Ceramic Metal Halide Lamps

Watts	Bulb Base	Product Number	Symbols, Footnotes	Ordering Code	ANSI Code Ballast Ref.	Pkg. Qty.	Description (401, 407)	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.)(351)	Approx. Initial Lumens(352)	Approx. Mean Lumens(353)	CRI	CCT (K)
-------	-----------	----------------	--------------------	---------------	------------------------	-----------	------------------------	-----------	-----------	-----------------------------	-----------------------------	--------------------------	-----	---------

Protected MasterColor Ceramic Metal Halide PAR Lamps (391, 392, 396)

Open or enclosed luminaires; lifetime color stability within ±200K

22	PAR20 Med.	21151-6	★ ●	CDM20/PAR20/ M/SP/3K/ALTO	C156/C175/O MBCP=18,000	12	G, PAR WISO Spot 10° (397)	—	3¼	9000	940	600	81	3000
		21152-4	★ ●	CDM20/PAR20/ M/FL/3K/ALTO	C156/C175/O MBCP=2800	12	G, PAR WISO Flood 30° (397)	—	3¼	9000	980	615	81	3000
	PAR30L Med.	21149-0	★ ●	CDM20/PAR30L/ M/SP/3K/ALTO	C156/C175/O MBCP=32,000	6	G, PAR WISO Spot 10° (397)	—	4¼	9000	1200	750	81	3000
		21140-9	★ ●	CDM20/PAR30L/ M/FL/3K/ALTO	C156/C175/O MBCP=4625	6	G, PAR WISO Flood 25° (397)	—	4¼	9000	1200	750	81	3000
39	PAR20 Med.	43418-3	★ ●	CDM-R Elite 35W/930 E26/24 PAR20 10D	C130/O MBCP=26,000	6	G, PAR WISO Spot 10° (397)	—	3¼	15,000	2160	2040	91	3000
		43419-1	★ ●	CDM-R Elite PAR20 35W 930 E26 30DG	C130/O MBCP=5800	6	G, PAR WISO Flood 30° (397)	—	3¼	15,000	2160	2040	91	3000
	PAR30L Med.	42645-2	★ ●	CDM-R Elite PAR30L 35W/930 E26 10DG	C130/O MBCP=44,000	6	G, PAR WISO Spot 10° (397)	—	4¼	15,000	2700	2300	91	3000
		42648-6	★ ●	CDM-R Elite PAR30L 35W/930 E26 30DG	C130/O MBCP=7700	6	G, PAR WISO Flood 25° (397)	—	4¼	15,000	2700	2300	91	3000
70	PAR30L Med.	42652-8	★ ●	CDM-R Elite PAR30L 70W/930 E26 10DG	C98/O MBCP=66,000	6	G, PAR WISO Spot 10°	—	4¼	15,000	5310	4510	92	3000
		42654-4	★ ●	CDM-R Elite PAR30L 70W/930 E26 40DG	C98/O MBCP=10,000	6	G, PAR WISO Flood 40°	—	4¼	15,000	5310	4510	92	3000
		15142-3	★ ●	CDM70/PAR30L/ M/SP/4K/ALTO	C139/O MBCP=63,000	6	G, PAR WISO Spot 10°	—	4¼	12,000	4300	3010	94	4000
		15143-1	★ ●	CDM70/PAR30L/ M/FL/4K/ALTO	C139/O MBCP=9000	6	G, PAR WISO Flood 40°	—	4¼	12,000	4300	3010	94	4000
	PAR38 Med.	45646-7	★ ●	CDM70/PAR38/ SP/3K/ALTO ELITE	C98/O MBCP=40,000	12	G, PAR WISO Spot 15° (399)	—	5½	16,000	4700	3760	87	3000
		45647-5	★ ●	CDM70/PAR38/ FL/3K/ALTO ELITE	C98/O MBCP=15,000	12	G, PAR WISO Flood 25° (399)	—	5½	16,000	4800	3840	87	3000
		45648-3	☐ ★ ●	CDM70/PAR38/ SP/4K/ALTO ELITE	C98/O MBCP=40,000	12	G, PAR WISO Spot 15° (399)	—	5½	16,000	4300	3440	90	4200
		45649-1	☐ ★ ●	CDM70/PAR38/ FL/4K/ALTO ELITE	C98/O MBCP=15,000	12	G, PAR WISO Flood 25° (399)	—	5½	16,000	4600	3680	90	4200
100	PAR38 Med.	45650-9	★ ●	CDM100/PAR38/ SP/3K/ALTO ELITE	C90/O MBCP=50,000	12	G, PAR WISO Spot 15° (399)	—	5½	16,000	6600	5280	92	3000
		45651-7	★ ●	CDM100/PAR38/ FL/3K/ALTO ELITE	C90/O MBCP=20,000	12	G, PAR WISO Flood 25° (399)	—	5½	16,000	6800	5440	92	3000
		45652-5	☐ ★ ●	CDM100/PAR38/ SP/4K/ALTO ELITE	C90/O MBCP=50,000	12	G, PAR WISO Spot 15°(399)	—	5½	16,000	5500	4400	90	4200
		45653-3	☐ ★ ●	CDM100/PAR38/ FL/4K/ALTO ELITE	C90/O MBCP=20,000	12	G, PAR WISO Flood 25° (399)	—	5½	16,000	6400	5120	92	4200

For the most current product information, go to the e-catalog on www.philips.com
HID symbols and footnotes located on page 84



High Intensity Discharge Lamps

MasterColor Ceramic Metal Halide Lamps

Watts	Bulb Base	Product Number	Symbols, Footnotes	Ordering Code	ANSI Code Ballast Ref.	Pkg. Qty. ‡	Description (401, 407)	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.) (351)	Approx. Initial Lumens (352)	Approx. Mean Lumens (353)	CRI	CCT (K)
-------	-----------	----------------	--------------------	---------------	------------------------	-------------	------------------------	-----------	-----------	------------------------------	------------------------------	---------------------------	-----	---------

Protected MasterColor Ceramic Metal Halide Lamps (391, 392, 396, 399)

ED17P sleeved arc tube; open or enclosed luminaires; lifetime color stability within ±200K; pulse start

50	ED17P	Med.	42368-1	★†	MHC50/U/MP/3K ELITE	M148/M110/O	12	G, Clear, FadeBlock	3 ³ / ₁₆	5 ¹ / ₁₆	20,000	4800	3840	90	3000
			42994-4	★†	MHC50/U/MP/4K/ELITE	M148/M110/O12		G, Clear, FadeBlock	3 ³ / ₁₆	5 ³ / ₁₆	20,000	4645	3716	92	4000
70	ED17P	Med.	42370-7	★†	MHC70/U/MP/3K ELITE	M143/M98/O	12	G, Clear, FadeBlock	3 ³ / ₁₆	5 ¹ / ₁₆	20,000	6700	5360	90	3000
			42369-9	★†	MHC70/C/U/MP/3K ELITE	M143/M98/O	12	G, Coated, FadeBlock	—	5 ¹ / ₁₆	20,000	6100	4880	90	3000
			42995-0	★†	MHC70/U/MP/4K/ELITE	M143/M98/O	12	G, Clear, FadeBlock	3 ³ / ₁₆	5 ¹ / ₁₆	20,000	6189	4951	93	4000
			42997-6	★†	MHC70/C/U/MP/4K/ELITE	M143/M98/O	12	G, Coated, FadeBlock	—	5 ¹ / ₁₆	20,000	5896	4717	93	4000
100	ED17P	Med.	42367-3	★†	MHC100/U/MP/3K ELITE	M140/M90/O	12	G, Clear, FadeBlock	3 ³ / ₁₆	5 ¹ / ₁₆	20,000	10,000	8000	90	3000
			42371-5	★†	MHC100/C/U/MP/3K ELITE	M140/M90/O	12	G, Coated, FadeBlock	—	5 ¹ / ₁₆	20,000	9200	7360	90	3000
			42993-6	★†	MHC100/U/MP/4K/ELITE	M140/M90/O	12	G, Clear, FadeBlock	3 ³ / ₁₆	5 ¹ / ₁₆	20,000	9249	7399	93	4000
			42996-8	★†	MHC100/C/U/MP/4K/ELITE	M140/M90/O	12	G, Coated, FadeBlock	—	5 ¹ / ₁₆	20,000	8750	7000	93	4000
150	ED17P	Med.	13463-5	★	MHC150/U/MP/3K	M142/M102/O	12	G, Clear, FadeBlock	3 ³ / ₁₆	5 ¹ / ₁₆	16,000	12,900	9545	85	3000
			13464-3	★	MHC150/C/U/MP/3K	M142/M102/O	12	G, Coated, FadeBlock	—	5 ¹ / ₁₆	16,000	11,900	8805	85	3000
			37724-2	★	MHC150/U/MP/4K	M142/M102/O	12	G, Clear, FadeBlock	3 ³ / ₁₆	5 ¹ / ₁₆	20,000	12,000	9000	92	4000
			37726-7	□★	MHC150/C/U/MP/4K	M142/M102/O	12	G, Coated, FadeBlock	—	5 ¹ / ₁₆	20,000	11,000	8250	92	4000

MasterColor Ceramic Metal Halide ED17, ED28 Lamps (391, 392, 399)

Enclosed luminaires only; lifetime color stability within ±200K; pulse start

50	ED17	Med.	41949-9	★†	MHC50/U/M/3K ELITE	M148/M110/E	12	G, Clear	3 ³ / ₁₆	5 ¹ / ₁₆	20,000	5500	4400	90	3000
			41950-7	★†	MHC50/C/U/M/3K ELITE	M148/M110/E	12	G, Coated	—	5 ¹ / ₁₆	20,000	5200	4160	90	3000
			42992-8	★†	MHC50/U/M/4K ELITE	M148/M110/E	12	G, Clear	3 ³ / ₁₆	5 ¹ / ₁₆	20,000	4779	3823	88	4000
			42987-8	★†	MHC50/C/U/M/4K ELITE	M148/M110/E	12	G, Coated	—	5 ¹ / ₁₆	20,000	3544	2835	83	4000
70	ED17	Med.	41947-3	★†	MHC70/U/M/3K ELITE	M143/M98/E	12	G, Clear	3 ³ / ₁₆	5 ¹ / ₁₆	20,000	7700	6100	90	3000
			41948-1	★†	MHC70/C/U/M/3K ELITE	M143/M98/E	12	G, Coated	—	5 ¹ / ₁₆	20,000	7300	5800	90	3000
			42990-2	★†	MHC70/U/M/4K/ELITE	M143/M98/E	12	G, Clear	3 ³ / ₁₆	5 ¹ / ₁₆	20,000	6630	5304	89	4000
			42991-0	★†	MHC70/C/U/M/4K/ELITE	M143/M98/E	12	G, Coated	—	5 ¹ / ₁₆	20,000	6149	4919	88	4000
100	ED17	Med.	41951-5	★†	MHC100/U/M/3K ELITE	M140/M90/E	12	G, Clear	3 ³ / ₁₆	5 ¹ / ₁₆	20,000	11,000	9350	85	3000
			41952-3	★†	MHC100/C/U/M/3K ELITE	M140/M90/E	12	G, Coated	—	5 ¹ / ₁₆	20,000	10,200	8670	85	3000
			42988-6	★†	MHC100/U/M/4K/ELITE	M140/M90/E	12	G, Clear	3 ³ / ₁₆	5 ¹ / ₁₆	20,000	9955	7964	93	4000
			42989-4	★†	MHC100/C/U/M/4K/ELITE	M140/M90/E	12	G, Coated	—	5 ¹ / ₁₆	20,000	9530	7624	93	4000
	ED28	Mog.	43070-2	□★	MHC100/U/ED28/HR/4K	M140/M90/E	12	G, Clear (372, 377, 378)	5	8 ¹ / ₁₆	20,000	10,000	8000	90	4100
150	ED17	Med.	13022-9	★	MHC150/U/M/3K	M142/M102/E	12	G, Clear	3 ¹ / ₂	5 ¹ / ₁₆	16,000	14,000	10,500	85	3000
			13023-7	★	MHC150/C/U/3K	M142/M102/E	12	G, Coated	—	5 ¹ / ₁₆	16,000	12,500	9375	85	3000
			37720-0	★	MHC150/U/M/4K	M142/M102/E	12	G, Clear	3 ³ / ₁₆	5 ¹ / ₁₆	20,000	13,000	9750	92	4000
			37721-8	★	MHC150/C/U/M/4K	M142/M102/E	12	G, Coated	—	5 ¹ / ₁₆	20,000	12,000	9000	92	4000

For the most current product information, go to the e-catalog on www.philips.com
HID symbols and footnotes located on page 84



High Intensity Discharge Lamps

MasterColor Ceramic Metal Halide, CosmoWhite, Energy Advantage Ceramic Metal Halide Lamps

Watts	Bulb Base	Product Number	Symbols	Ordering Footnotes Code	ANSI Code Ballast Ref.	Pkg. Qty. Description (401, 407)	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.)(351)	Approx. Initial Lumens(352)	Approx. Mean Lumens(353)	CRI	CCT (K)
-------	-----------	----------------	---------	-------------------------	------------------------	----------------------------------	-----------	-----------	-----------------------------	-----------------------------	--------------------------	-----	---------

MasterColor Ceramic Metal Halide Pulse Start ED23.5 Lamps (391, 392, 399)

Enclosed luminaires only; lifetime color stability within $\pm 200\text{K}$; pulse start

70	ED23½ Mog.	43069-4	☐★●	CDM70/U/PS/4k ELITE	M143/M98/E	12	G, Clear	5	7¼	20,000	6800	5440	88	4400
100	ED23½ Mog.	43068-6	☐★●	CDM100/U/PS/4K ELITE	M140/M90/E	12	G, Clear	5	7¼	20,000	9900	7920	91	4200
150	ED23½ Mog.	15494-8	☐★●	CDM150/U/PS/4K ALTO	M142/M102/E	12	G, Clear	5	7¼	24,000	13,000	9360	85	4000

CosmoWhite (391, 392, 396, 397)

Enclosed luminaires only; lifetime color stability within $\pm 200\text{K}$ (HOR = Horizontal Operation $\pm 15^\circ$)

45	T6	PGZ12	41889-7	★☐†	CPO-T WHITE 45W/728 TBD	12	G, Clear, FadeBlock, Horiz. $\pm 15^\circ$	2½	5½	30,000*	4950	4400	70	2800
60	T6	PGZ12	15731-3	★☐	CPO-T WHITE 60W/728 C187/E	12	G, Clear, FadeBlock, Horiz. $\pm 15^\circ$	2½	5½	30,000*	7200	6400	70	2800
			41884-8	★☐†	CPO-T WHITE 60W/840 C187/E	12	G, Clear, FadeBlock, Horiz. $\pm 15^\circ$	2½	5½	16,000	7020	6300	80	4000
90	T6	PGZ12	40604-1	★☐	CPO-T WHITE 90W/728 C188/E	12	G, Clear, FadeBlock, Horiz. $\pm 15^\circ$	2¾	5½	30,000*	10,450	8800	70	2800
			41794-9	★☐†	CPO-T WHITE 90W/840 C188/E	12	G, Clear, FadeBlock, Horiz. $\pm 15^\circ$	2¾	5½	15,000	10,350	9625	80	4000
140	T6	PGZ12	15732-1	★☐	CPO-T WHITE 140W/728 C189/E	12	G, Clear, FadeBlock, Horiz. $\pm 15^\circ$	2¾	5½	30,000*	16,500	14,520	70	2800
			41795-5	★☐†	CPO-T WHITE 140W/840 C189/E	12	G, Clear, FadeBlock, Horiz. $\pm 15^\circ$	2¾	5½	15,000	16,100	15,130	80	4000

Energy Advantage CDM with AllStart Technology ED17 Lamps (391, 392, 396, 397)

Enclosed luminaires only; lifetime color stability within $\pm 200\text{K}$

145	ED17	Med.	41106-6	★☐†	CDM145/U/M/4K/ ED17 EA AllStart	C192/E**	12	G, Clear, Fadeblock	3⅞	5⅞	20,000	13,340	10,670	>80	4300
			41320-3	★☐†	CDM145/C/U/M/4K/ ED17 EA AllStart	C192/E**	12	G, Coated, Fadeblock	—	5⅞	20,000	12,300	9840	>80	4300


For the most current product information, go to the e-catalog on www.philips.com
HID symbols and footnotes located on page 84

* 30,000 horizontal application but 20,000 vertical application

** 145W compatible with M57 probe start ballast. Also compatible with M152 pulse start ballasts

Maintenance Curve

Philips Energy Advantage CDM 330W Lamps with AllStart Technology

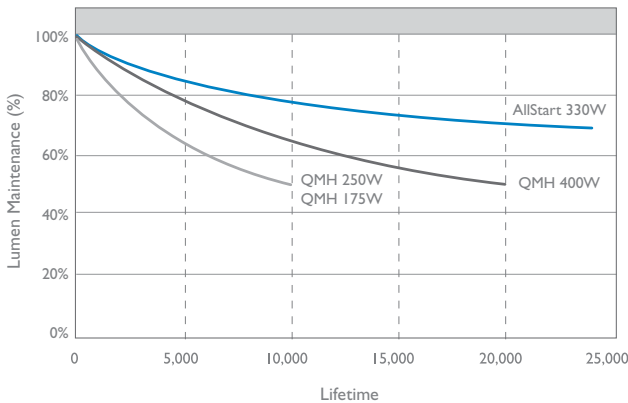

ED23½ Mog.



CosmoWhite T6 PGZ12



ED17 Med.

Energy Advantage Lamp Comparisons

Philips Energy Advantage CDM Lamp with AllStart Technology	Standard Metal Halide Lamp Replacement
145W Energy Advantage CDM Lamp	175W Standard Metal Halide Lamp
205W Energy Advantage CDM Lamp	250W Standard Metal Halide Lamp
260W Energy Advantage CDM Lamp	320W Standard Metal Halide Lamp
330W Energy Advantage CDM Lamp	400W Standard Metal Halide Lamp
860W Energy Advantage CDM Lamp	1000W Standard Metal Halide Lamp

High Intensity Discharge Lamps

Energy Advantage Ceramic Metal Halide Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Ordering Code	ANSI Code Ballast Ref.	Pkg. Qty.‡	Description(401, 407)	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.)(351)	Approx. Initial Lumens(352)	Approx. Mean Lumens(353)	CRI	CCT (K)
-------	------	------	----------------	--------------------	---------------	------------------------	------------	-----------------------	-----------	-----------	-----------------------------	-----------------------------	--------------------------	-----	---------

Energy Advantage CDM with AllStart Technology (391, 392, 396, 397)*

Open or Enclosed luminaires; lifetime color stability within ±200K

145	ED28	EX39	41107-4	★ ◻ ◼ ◽	CDM145/U/O/4K/	C192/O ¹	12	G, Clear, Fadeblock	5	8½	20,000	13,775	11,020	87	4000
			Excl. Mog.	(411)	ED28 EA AllStart										
205	ED28	EX39	23256-1	★ ◻ ◼ ◽	CDM145/C/U/O/4K/	C192/O ¹	12	G, Coated, Fadeblock	—	8½	20,000	12,615	10,090	87	4000
			Excl. Mog.	(411)	ED28 EA AllStart										
260	ED28	EX39	23256-7	★ ◻ ◼ ◽	CDM205/U/O/4K/	C184/O ²	12	G, Clear, Fadeblock	5	8½	20,000	19,500	15,600	85	4100
			Excl. Mog.	(412)	EA AllStart										
330	ED28	EX39	41937-4	★ ◻ ◼ ◽	CDM205/C/U/O/4K/	C184/O ²	12	G, Coated, Fadeblock	—	8½	20,000	18,000	14,400	85	4100
			Excl. Mog.	(412)	EA AllStart										
260	ED28	EX39	41937-4	★ ◻ ◼ ◽	CDM260/U/O/4K/	C195/O ⁴	12	G, Clear, Fadeblock	5	8½	20,000	27,000	21,600	90	4000
			Excl. Mog.	(431)	EA AllStart										
330	ED28	EX39	41105-8	★ ◻ ◼ ◽	CDM330/U/O/4K/ED28	C185/O ³	12	G, Clear, Fadeblock	5	8½	20,000	33,000	26,400	90	4000
			Excl. Mog.	(413)	EA AllStart										
			ED37	EX39	23259-5										
Excl. Mog.	(413)	EA AllStart													
			23693-5	★ ◻ ◼ ◽	CDM330/C/U/O/4K/	C185/O ³	6	G, Coated, Fadeblock	—	11½	24,000	31,000	23,250	90	4000
			Excl. Mog.	(413)	EA AllStart										

Open or Enclosed luminaires; lifetime color stability within ±200K; (V = Vertical Operation ±15°)

860	BT37	EX39	42178-4	★ ◻ ◼ ◽	CDM860/V/O/4K/BT37	C194/O ⁵	6	G, Clear, Fadeblock	7	11½	20,000	82,000	65,000	92	3700
			Excl. Mog.	(432)	EA AllStart										
	BT56	EX39	42179-2	★ ◻ ◼ ◽	CDM860/V/O/4K/BT56	C194/O ⁵	6	G, Clear, Fadeblock	9½	15½	20,000	82,000	65,000	92	3700
	Excl. Mog.	(432)	EA AllStart												

Energy Advantage CDM Long Life Lamp with AllStart Technology (391, 392, 396, 397)

Open or Enclosed luminaires; lifetime color stability within ±200K; (V = Vertical Operation ±15°)

330	ED37	EX39	42177-6	★ ◻ ◼ ◽	CDM330/V/O/4K/LL	C185/O ⁴	6	G, Clear, Fadeblock	7	11½	36,000	32,950	23,100	90	4000
			Excl. Mog.	(413)	EA AllStart										

- 1) 145W compatible with M57 probe start ballast. Also compatible with M152 pulse start ballasts
 2) 205W compatible with M58 probe start ballast. Also compatible with M138 and M153 pulse start ballasts
 3) 330W compatible with M59 probe start ballast. Also compatible with M128, M135, M155, and M172 pulse start ballasts
 4) 260W compatible with M154 and M132 pulse start ballasts
 5) 860W compatible with M47 probe start ballast. Also compatible with M141 pulse start ballast
 For the most current product information, go to the e-catalog on www.philips.com
 HID symbols and footnotes located on page 84



High Intensity Discharge Lamps

Metal Halide Lamps

Watts	Bulb Base	Product Number	Symbols, Footnotes	Ordering Code	ANSI Code Ballast Ref.	Pkg. Qty. ‡	Description (401, 407)	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.) (351)	Approx. Initial Lumens (352)	Approx. Mean Lumens (353)	CRI	CCT (K)
-------	-----------	----------------	--------------------	---------------	------------------------	-------------	------------------------	-----------	-----------	------------------------------	------------------------------	---------------------------	-----	---------

Protected Pulse Start Metal Halide "O" Rated Lamps (372, 374, 391)

Open or enclosed luminaires; pulse start metal halide is designed for operation on only specified ANSI compatible ballasts with metal halide pulse ignitors*§

250	ED28	EX39	20756-3	■ ★	MP250/BU/PS	M153/	12	G, Clear, Base Up ± 15° Pulse Start	5	8%	14,000	23,000	16,100	62	3800
			Excl.Mog			M138/O									
320	ED37	EX39	13039-3	■ ★	MP320/BU/PS	M154/	6	G, Clear, Base Up ± 15° Pulse Start	7	11½	20,000	29,500	20,650	65	3800
			Excl.Mog			M132/O									
350	ED37	EX39	39101-1	■ ★	MP350/BU/PS	M131/O	6	G, Clear, Base Up ± 15° Pulse Start	7	11½	20,000	34,000	23,800	64	4000
			Excl.Mog												
400	ED37	EX39	13334-8	■ ★	MP400/BU/PS	M155/M128/	6	G, Clear, Base Up ± 15° Pulse Start	7	11½	20,000	40,000	28,000	65	3800
			Excl.Mog			M135/O									
			13335-5	■ ★	MP400/C/BU/PS	M155/M128/	6	G, Coated Base Up ± 15° Pulse Start	—	11½	20,000	36,000	23,400	68	3600
						M135/O									

For the most current product information, go to the e-catalog on www.philips.com
HID symbols and footnotes located on page 84



High Intensity Discharge Lamps

Metal Halide Lamps

Watts	Bulb Base	Product Number	Product Symbols, Footnotes	Ordering Code	ANSI Code Ballast Ref.	Pkg. Qty. ‡	Description (401, 407)	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.) (351)	Approx. Initial Lumens (352)	Approx. Mean Lumens (353)	CRI	CCT (K)
-------	-----------	----------------	----------------------------	---------------	------------------------	-------------	------------------------	-----------	-----------	------------------------------	------------------------------	---------------------------	-----	---------

Pulse Start Metal Halide Lamps (372, 374, 391)

Enclosed luminaires only unless otherwise noted; base up operation ± 15° unless otherwise noted.

Pulse start metal halide is designed for operation on only specified ANSI compatible ballasts with metal halide pulse ignitors.

175	ED17	Med.	23249-6	■ ★	MS175/M/BU/PS	M152/M137/E	12	G, Base Up ± 15°, Pulse Start	3 3/8	5 1/8	15,000	17,500	12,250	68	4000
	ED28	Mog.	27662-6	■ ★	MS175/BU/PS	M152/M137/E	12	G, Base Up ± 15°, Pulse Start	5	8 3/8	15,000	16,000	11,200	62	3700
			20751-4	■ ★	MS175/HOR/PS	M152/M137/E	12	G, Clear, Horizontal, Pulse Start	5	8 3/8	11,500	12,800	8960	62	4200
250	ED28	Mog.	23280-1	■ ★	MS250/U/PS	M153/M138/E	12	G, Clear, Universal, Pulse Start (385)	5	8 3/8	12,000	22,000	15,400	62	3800
320	ED28	Mog.	38381-0	■ ★	MS320/U/PS	M154/M132/E	12	G, Clear, Pulse Start (385)	5	8 3/8	20,000	30,000	21,000	62	4100
350	ED37	Mog.	38387-7	■ ★	MS350/BU/PS	M131/E	6	G, Clear, Base Up ± 15°, Pulse Start	7	11 1/2	20,000	36,000	25,200	62	4000
400	ED28	Mog.	23252-0		MS400/BU/ED28/PS	M155/M128/	12	G, Base Up ± 15°, Pulse Start	5	8 3/8	20,000	44,000	30,800	68	4000
						M135/E									
				23253-8		MS400/HOR/ED28/PS	M155/M128/	12	G, Clear, Horizontal, Pulse Start	5	8 3/8	20,000	40,000	28,000	68
					M135/E										
	ED37	Mog.	23283-5	■ ★	MS400/U/PS	M155/M135/	6	G, Clear, Universal, Pulse Start (385)	7	11 1/2	15,000	40,000	28,000	62	3800
						M128/E									
750	BT37	Mog.	13540-0	■ ★	MS750/BU/BT37/PS	M149/E	6	G, Clear, Base Up ± 15°, Pulse Start	7	11 1/2	16,000	82,000	61,500	65	4000
1000	BT37	Mog.	36019-8	■ ★	MS1000/BU/BT37/PS	M141/E	6	G, Clear, Base Up ± 15°, Pulse Start	7	11 1/2	15,000	120,000	96,000	65	3700

For the most current product information, go to the e-catalog on www.philips.com
HID symbols and footnotes located on page 84



High Intensity Discharge Lamps

Metal Halide Lamps

Watts	Bulb Base	Product Number	Symbols, Footnotes	Ordering Code	ANSI Code Ballast Ref.	Pkg. Qty. ‡	Description (401, 407)	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.) (351)	Approx. Initial Lumens (352)	Approx. Mean Lumens (353)	CRI	CCT (K)
-------	-----------	----------------	--------------------	---------------	------------------------	-------------	------------------------	-----------	-----------	------------------------------	------------------------------	---------------------------	-----	---------

Protected Metal Halide "O" Rated Lamps (372, 374, 377)*

Open or enclosed luminaires

175	ED28	EX39	28119-6	■ ★	MP175/BU	M57/O	12	G, Clear, Base Up ±15°	5	8%	10,000	15,000	12,000	65	3800
			Excl.Mog												
250	ED28	EX39	28124-6	■ ★	MP250/BU	M58/O	12	G, Clear, Base Up ±15°	5	8%	10,000	22,000	16,500	62	3800
			Excl.Mog												
360	ED37	EX39	13067-4	■ ★	MP360BU/EW	M165/M59/O	6	G, Clear, Base Up ±15°	7	11½	20,000	34,200	23,940	65	4000
			Excl.Mog		MP360/C/BU/EW	M165/M59/O	6	G, Coated, Base Up ±15°	—	11½	20,000	31,700	20,605	68	3600
400	ED37	EX39	13332-2	■ ★	MP400/BU	M59/O	6	G, Clear, Base Up ±15°	7	11½	20,000	38,000	26,600	65	4000
1000	BT56	EX39	28118-8	■ ★	MP1000/BU	M47/O	6	G, Clear, Base Up ±15°	9½	15%	12,000	107,000	75,000	65	3900
			Excl.Mog												

Double-Ended Metal Halide Lamps (374, 387, 393)

Enclosed luminaires (387)

1800	TD	PSFC20-6/31360-1			MHD1800W	—	4	Sports Ltg. Spot Horizontal ± 15°	4¼	14	4500	150,000	—	92	5600
		Special SFc20-6													

For the most current product information, go to the e-catalog on www.philips.com
HID symbols and footnotes located on page 84



High Intensity Discharge Lamps

Metal Halide Lamps, MasterColor Ceramic Metal Halide Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Ordering Code	ANSI Code Ballast Ref.	Pkg. Qty.‡	Description(401, 407)	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.)(351)	Approx. Initial Lumens(352)	Approx. Mean Lumens(353)	CRI	CCT (K)
-------	------	------	----------------	--------------------	---------------	------------------------	------------	-----------------------	-----------	-----------	-----------------------------	-----------------------------	--------------------------	-----	---------

Metal Halide Lamps (372)

Enclosed luminaires only

150	BD17	Med.	35462-1	★	MH150/U/M	M107/E	12	G, Clear (385, 400)	3 ³ / ₁₆	5 ¹ / ₁₆	10,000	12,500	8500	65	3700
175	BD17	Med.	31358-5	■★	MH175/U/M	M57/E	12	G, Clear (377, 385, 393)	3 ³ / ₁₆	5 ¹ / ₁₆	10,000	13,500	9100	65	4000
			31359-3	■★	MH175/C/U/M	M57/E	12	G, Coated (377, 385)	—	5 ¹ / ₁₆	10,000	13,000	8380	65	3700
	ED28	Mog.	28733-4	■★	MH175/U	M57/E	12	G, S, Clear (377, 385, 393)	5	8 ¹ / ₁₆	10,000	13,500	8775	65	4000
250	ED28	Mog.	28728-4	■★	MH175/C/U	M57/E	12	G, S, Coated (374, 377, 385)	—	8 ¹ / ₁₆	10,000	13,000	8200	70	3700
			27484-5	■★	MH250/U	M58/E	12	G, S, Clear (377, 385, 393)	5	8 ¹ / ₁₆	10,000	20,500	13,500	65	4000
400	ED28	Mog.	42602-3	★	MH400/U/ED28	M59/E	12	G, Clear (377, 385, 393)	5	8 ¹ / ₁₆	20,000	36,000	24,000	63	4000
	ED37	Mog.	27449-8	★	MH400/U	M59/E	6	G, S, Clear (377, 385, 393)	7	11 ¹ / ₁₆	20,000	39,000	25,350	65	3900
			43230-2	★	MH400/C/U	M59/E	6	G, S, Coated (377, 385, 393)	—	11 ¹ / ₁₆	20,000	34,000	22,100	65	3700
1000	BT37	Mog.	32150-5	■★	MH1000/U/BT37	M47/E	6	G, Clear (359, 377, 385, 393)	7	11 ¹ / ₁₆	10,000	110,000	71,500	65	3700
	BT56	Mog.	41522-4	■★	MH1000/U	M47/E	6	G, S, Clear (377, 385, 393)	9 ¹ / ₁₆	15 ¹ / ₁₆	12,000	114,000	79,800	65	3900
1500	BT56	Mog.	13162-3	★	MH1500/U	M48/E	6	G, S, Clear (359, 374, 375, 377, 402)	9 ¹ / ₁₆	15 ¹ / ₁₆	6000	172,000	137,600	60	4000

For the most current product information, go to the e-catalog on www.philips.com
HID symbols and footnotes located on page 84



High Intensity Discharge Lamps

White SON Lamps, High Pressure Sodium Lamps

Watts	Bulb Base	Product Number	Symbols, Footnotes	Ordering Code	ANSI Code	Pkg. Ballast Ref.	Pkg. Qty. ‡	Description (401, 407)	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.) (351)	Approx. Initial Lumens (352)	Approx. Mean Lumens (353)	CRI	CCT (K)
-------	-----------	----------------	--------------------	---------------	-----------	-------------------	-------------	------------------------	-----------	-----------	------------------------------	------------------------------	---------------------------	-----	---------

Ceramalux High Pressure Sodium Lamps (360, 373)

Featuring ALTO Lamp Technology

35	BD17 Med.	40979-7	■ †	C35S76/M	S76	12	G (376)	3 3/16	5 1/16	24,000+	2250	2025	21	2100
50	BD17 Med.	40980-5	■ †	C50S68/M	S68	12	G (376)	3 3/16	5 1/16	24,000+	4000	3600	21	2100
	ED23 3/4 Mog.	36867-0	■ †	C50S68/ALTO	S68	12	G, S (376)	5	7 1/4	24,000+	4000	3600	21	2100
70	BD17 Med.	33192-6	■	C70S62/M	S62	12	G (376)	3 3/16	5 1/16	24,000+	6300	5850	21	2100
		33214-8	■	C70S62/D/M	S62	12	G (376)	—	5 1/16	24,000+	5860	5270	21	2100
	ED23 3/4 Mog.	36869-6	■ ●	C70S62/ALTO	S62	12	G, S (376)	5	7 1/4	24,000+	6500	5670	21	2100
100	BD17 Med.	34446-5	■	C100S54/M	S54S	12	G (376)	3 1/2	5 1/16	24,000+	9500	8550	21	2100
		34448-1	■	C100S54/D/M	S54S	12	G (376)	—	5 1/16	24,000+	8800	7920	21	2100
	ED23 3/4 Mog.	36872-0	■ ●	C100S54/ALTO	S54	12	G, S (376)	5	7 1/4	24,000+	9400	8460	21	2100
		33227-0	■ ●	C100S54/D/ALTO	S54	12	G, S (376)	—	7 1/4	24,000+	8610	7750	21	2100
150	BD17 Med.	30347-9	■	C150S55/M	S55	12	G (376)	3 1/2	5 1/16	24,000+	16,000	14,400	21	2100
		30348-7	■	C150S55/D/M	S55	12	G (376)	—	5 1/16	24,000+	15,000	13,500	21	2100
	ED23 3/4 Mog.	36874-6	■ ●	C150S55/ALTO	S55	12	G, S (370, 376)	5	7 1/4	24,000+	15,800	14,220	21	2100
	ED28 Mog.	36876-1	■ ●	C150S56/ALTO	S56	12	G, S (370, 376)	5	8 1/16	24,000+	15,000	13,950	21	2100
200	ED18 Mog.	36877-9	■ ●	C200S66/ALTO	S66MN-200	12	G, S (376)	5 3/4	9 1/4	24,000+	21,400	19,260	21	2100
250	ED18 Mog.	36879-5	■ ●	C250S50/ALTO	S50	12	G, S (376)	5 3/4	9 1/4	24,000+	27,000	24,300	21	2100
400	ED18 Mog.	36881-1	■ ●	C400S51/ALTO	S51	12	G, S (376)	5 3/4	9 1/4	24,000+	50,000	45,000	21	2100
600	T14 Mog.	23982-2	■	C600S106	S106	12	G (376)	6 1/4	11 1/4	24,000+	90,000	81,000	21	2100
1000	ED25 Mog.	36883-7	■ ●	C1000S52/ALTO	S52XB-1000	6	G, S (359, 362, 376)	8 3/4	15 1/4	24,000	140,000	126,000	21	2100
	ED37 Mog.	32386-5	■	C1000S52/ED37	S52	6	G, S (376)	7	11 1/4	24,000	125,000	112,000	21	2100

For the most current product information, go to the e-catalog on www.philips.com
HID symbols and footnotes located on page 84



High Intensity Discharge Lamps

High Pressure Sodium Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Ordering Code	ANSI Code	Pkg. Ballast Ref.	Qty. Description (401, 407)	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.) (351)	Approx. Initial Lumens (352)	Approx. Mean Lumens (353)	CRI	CCT (K)
-------	------	------	----------------	--------------------	---------------	-----------	-------------------	-----------------------------	-----------	-----------	------------------------------	------------------------------	---------------------------	-----	---------

Ceramalux High Pressure Sodium Non-Cycling Lamps (360, 373, 376)

Featuring ALTO Lamp Technology

70	ED23½	Mog.	42665-0	★ ●	C70S62/ALTO NC HPS	S62	12	G, S	5	7¼	30,000	6300	5610	21	2100
100	ED23½	Mog.	14740-5	★ ●	C100S54/ALTO NC HPS	S54	12	G, S	5	7¼	30,000	10,000	9000	21	2100
150	ED23½	Mog.	14741-3	★ ●	C150S55/ALTO NC HPS	S55	12	G, S	5	7¼	30,000	16,000	14,400	21	2100
200	ED18	Mog.	15725-5	★ ●	C200S66/ALTO NC HPS	S66	12	G, S	5¾	9¾	30,000	22,000	19,800	21	2100
250	ED18	Mog.	14742-1	★ ●	C250S50/ALTO NC HPS	S50	12	G, S	5¾	9¾	29,000	26,100	25,650	21	2100
400	ED18	Mog.	14743-9	★ ●	C400S51/ALTO NC HPS	S51	12	G, S	5¾	9¾	30,000	50,000	45,000	21	2100
1000	ED25	Mog.	15726-3	★ ●	C1000S52/ALTO NC HPS	S52	6	G, S	8¾	15¼	30,000	130,000	117,000	21	2100

Ceramalux High Pressure Sodium Instant Restrike Lamps (360, 373, 376)

50	ED23½	Mog.	35467-0	■	C50S68/2	S68	12	G, S	5	7¼	24,000+	3800	3450	21	2100
70	ED23½	Mog.	26541-3	■	C70S62/2	S62	12	G, S	5	7¼	24,000+	5600	5050	21	2100
100	ED23½	Mog.	26560-3	■	C100S54/2	S54	12	G, S	5	7¼	24,000+	9100	8190	21	2100
150	ED23½	Mog.	26561-1	■	C150S55/2	S55	12	G, S	5	7¼	24,000+	15,600	14,000	21	2100
250	ED18	Mog.	37717-6	■	C250S50/2	S50	12	G, S	5¾	9¾	24,000+	27,500	24,750	21	2100
400	ED18	Mog.	37688-9	■	C400S51/2	S51	12	G, S	5¾	9¾	24,000+	49,000	44,000	21	2100

For the most current product information, go to the e-catalog on www.philips.com
HID symbols and footnotes located on page 84



ED23½
Mog.

ED18
Mog.

ED25
Mog.

High Intensity Discharge Lamps

High Pressure Sodium Lamps, Low Pressure Sodium Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Ordering Code	ANSI Code Ballast Ref. or MBCP ¹	Pkg. Qty.±	Description (401, 407)	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.)(351)	Approx. Initial Lumens(352)	Approx. Mean Lumens(353)	CCT (K)
-------	------	------	----------------	--------------------	---------------	---	------------	------------------------	-----------	-----------	-----------------------------	-----------------------------	--------------------------	---------

High Pressure Sodium—Horticulture Lamps (360, 373)

- Enhanced spectrum Xtreme grow lamp
- Excellent lumen maintenance at 97% (405) • Features ALTO Lamp Technology, environmentally responsible lamps

Note: Best practice suggests grow lamps to be replaced at maximum 40% of their rated average life in order to maintain same level of growth-light on plants over time

1000	ED25	Mog.	14064-0	■ ★	C1000S52/AGROLITE XT	S52	6	AGRO (359, 362, 376)	8½	15½	15,000	146,000	135,780	1850 2100
------	------	------	---------	-----	----------------------	-----	---	----------------------	----	-----	--------	---------	---------	-----------

For the most current product information, go to the e-catalog on www.philips.com
HID symbols and footnotes located on page 82

** The micromol value expresses the amount of light particles (photons) between 400 and 700 nm that are sent out by a light source (=Photosynthetic Photon Flux) per second. The amount that the plant absorbs determines the rate of photosynthesis and as a result the rate of plant growth. Therefore, the micromol value is also called "growth-light." In general, an increase of 22% in growth-light means an increase of 22% in plant growth

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Ordering Code	ANSI Code Ballast Ref.	Pkg. Qty.±	Description (401, 407)	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.)(351)	Approx. Initial Lumens(352)	Approx. Mean Lumens(353)	CRI	CCT (K)
-------	------	------	----------------	--------------------	---------------	------------------------	------------	------------------------	-----------	-----------	-----------------------------	-----------------------------	--------------------------	-----	---------

Low Pressure Sodium Lamps—SOX

18	T17	D.C. Bay	23404-7		SOX-E18	L69	12	Clear Base Up ± 110°	5½	8½	18,000	1800	1530	—	1700
35	T17	D.C. Bay	32781-7		SOX35	L70	12	Clear Base Up ± 110°	—	12½	18,000	4550	3870	—	1700
55	T17	D.C. Bay	32151-3		SOX55	L71	12	Clear Base Up ± 110°	9½	16½	18,000	7800	6630	—	1700
90	T21	D.C. Bay	32152-1		SOX90	L72	12	Clear Horizontal ± 20°	—	20½	18,000	14,300	12,155	—	1700
135	T21	D.C. Bay	32153-9		SOX135	L73	12	Clear Horizontal ± 20°	—	30½	18,000	22,600	19,210	—	1700
180	T21	D.C. Bay	15116-7		SOX180	L74	6	Clear Horizontal ± 20°	—	44½	18,000	32,000	22,400	—	1700

For the most current product information, go to the e-catalog on www.philips.com
HID symbols and footnotes located on page 84



High Intensity Discharge Lamps

Mercury Vapor Lamps

Watts	Bulb Base	Product Number	Symbols, Footnotes	Ordering Code	ANSI Code Ballast Ref.	Pkg. Qty.‡	Description(401, 407)	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.)(351)	Approx. Initial Lumens(352)	Approx. Mean Lumens(353)	CRI	CCT (K)
100	A23 Med.	35658-4	★	H38MP-100/DX	H38	24	G (379)	—	5 $\frac{1}{16}$	24,000+	4300	3700	45	3700
	ED23 $\frac{1}{2}$ Mog.	33713-9	★	H38JA-100/DX	H38	12	G, S (379)	—	7 $\frac{1}{2}$	24,000+	4400	3400	45	3700
175	ED28 Mog.	31965-7	★	H39KB-175	H39	12	G, S (355)	5	8 $\frac{1}{16}$	24,000+	7900	7400	20	6800
	ED28 Mog.	24805-4	★	H39KC-175/DX	H39	12	G, S (379)	—	8 $\frac{1}{16}$	24,000+	7900	7600	45	3700
250	ED28 Mog.	31985-5	★	H37KB-250	H37	12	G, S (355)	5	8 $\frac{1}{16}$	24,000+	12,100	10,500	20	6700
	ED28 Mog.	24814-6	★	H37KC-250/DX	H37	12	G, S (379)	—	8 $\frac{1}{16}$	24,000+	13,000	10,700	45	3700
400	ED37 Mog.	24842-7	★	H33GL-400/DX	H33	6	G, S (379)	—	11 $\frac{1}{2}$	24,000+	23,000	19,100	45	3700

Descriptive symbols for Mercury Vapor Lamps:

G—General Lighting

S—Street Lighting

For the most current product information, go to the e-catalog on www.philips.com


HID symbols and footnotes located on page 84




High Intensity Discharge Lamps

Base Types and Bulb Shapes

Base Types (Not Actual Sizes)

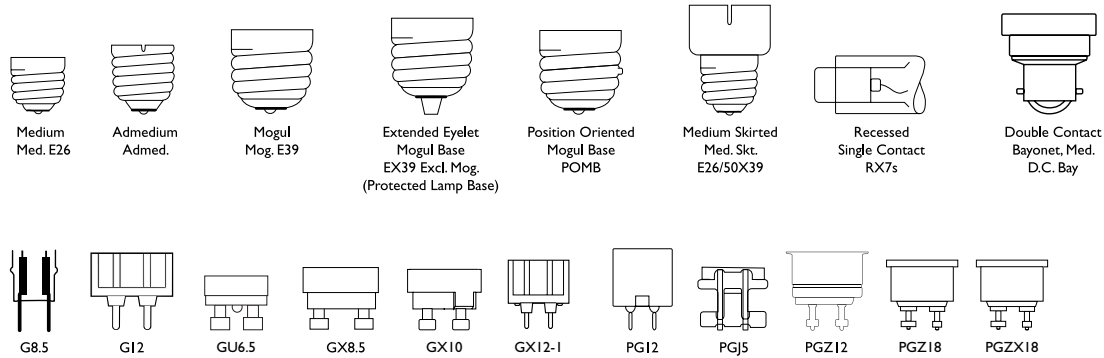

Bulb Shapes (Not Actual Sizes)

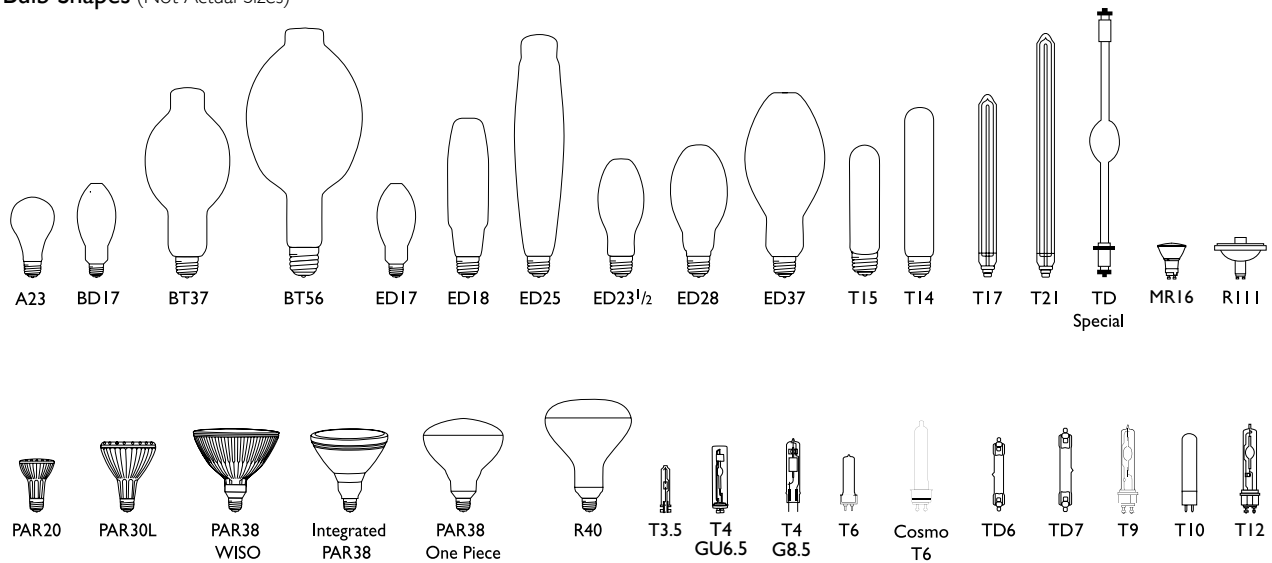

High Intensity Discharge Lamps

Symbols and Footnotes

For the most current product information, go to the e-catalog on www.philips.com

□ Exclusive to Philips Lighting North America Corporation

■ Nickel plated brass base

▲ Aluminum base

★ Heat resisting glass bulb

● This lamp is better for the environment because of its reduced mercury content. All Philips ALTO lamps give you end-of-life options which can simplify and reduce your lamp disposal costs depending on your state and local regulations

✕ Orders will be shipped until inventory is depleted; no longer manufactured

Ⓢ This Bulb Meets US Federal Minimum Efficiency Standard

↑ New since last printing

◇ Designed for instant start operation.

‡ Quantity shown is minimum shipping container—refer to Net Price Schedule for number of lamps to qualify as a standard case

G = General Lighting

S = Street Lighting

▼ PAR38 (one piece)

⌘ Satisfies the 2005 NEC for use in open luminaires. The 2005 NEC states that luminaires that use a metal halide lamp shall be provided with either a containment barrier that encloses the lamp (historically referred to as an enclosed luminaire) or shall be provided with a means, typically a special lampholder, that will only accept ANSI Type-O metal halide lamp. (Exception—this requirement will not apply to open luminaires with thick-glass parabolic reflector PAR lamps.) For more information regarding use of Type-O, S, and E metal halide systems, please refer to the NEMA white paper on this subject that is freely available at www.nema.org

★ Operate only on thermally electronic protected ballasts

■ Energy Saving Product.

(351) Rated average life is the life obtained, on average, from large representative groups of lamps in laboratory tests under controlled conditions at 10 or more operating hours per start. It is based on survival of at least 50% of the lamps, and allows for individual lamps or groups of lamps to vary considerably from the average. For HPS lamps, life is based on survival of 67% of the lamps

(352) Measured at 100 hrs. life. Approximate lumen values listed are for vertical operation of the lamp.

(353) Approximate lumen output at 40% of lamp rated average life.

(355) Separate filter is required for black light application.

(359) Electrically insulated support for bulb may be required, especially in horizontal and nearly horizontal operating positions.

(360) Follow fixture manufacturer' recommendations regarding proximity of ballast to bulb.

(362) This lamp should be shielded from moisture to prevent breakage.

(370) C150S55 and C150S56 lamps are not electrically interchangeable. Different ballasts are required for the proper operation of each lamp type. ANSI type S55 ballast is for the 55-volt (normal) lamp and the ANSI type S56 ballast is for the 100 volt (nominal) lamp.

(372) Color characteristics may vary somewhat from one lamp type to another. Time should be allowed for the lamp to stabilize in color when it is turned on for the first time or if for any reason its operating position is changed. This may require several hours' operation, with more than one start. Lamp color and output may change temporarily if the lamp is subjected to excess vibration or shock. Lamp color characteristics may change after long accumulate operating time.

(373) Fixtures should be designed so that sockets and wiring withstand starting pulse up to 5000 volts for 1000 watts and WHITE SON types and 4000 volts for other sizes.

(374) Performance may not be satisfactory unless operated within specified operating positions.

(375) If specified operating position is base up or base down to horizontal, this permits 15° beyond the horizontal.

(376) For use in fixtures which do not redirect a substantial portion of the energy toward the arc tube; otherwise very early failure is anticipated.

(377) Requires a ballast specified or approved for Philips metal halide lamps, or one that is designed to operate all popular brands of metal halide lamps. 1000W types will operate from H36 conventional lag type ballast for Mercury Vapor lamps at ambient temperatures of 50°F or higher. 1000W types must not be operated at 1500W.

(378) Requires auxiliary 10KV pulse ignitor for instant restrike.

(379) It is a characteristic of phosphor-coated vapor lamps to require a few hundred hours of operation to gradually reach normal characteristic color. New lamps may have a slight pink appearance during this initial operating period.

(385) Rated average life: vertical ±15°. Other positions 75% of vertical life.

(387) This lamp can cause serious skin burns and eye inflammation from shortwave ultraviolet radiation and must be fully enclosed in a fixture with an appropriate UV filter. To protect against possible risk of property damage or personal injury due to an arc tube rupture, the fixture enclosure must be capable of withstanding particles of glass having temperatures up to 1000°C. **DO NOT USE THIS LAMP IF THE UV FILTER IS MISSING.**

(389) Operates at rated output on ANSI 430W S145 SON AGRO ballasts.

(391) Requires a ballast specified or approved for Philips Metal Halide lamp or one designed to the indicated ANSI Standard. A pulse ignitor is required. Sockets and wiring must withstand starting pulse.

(392) Supply volts must be ±5% of rated ballast line volts for reactor type and ±10% for CWA or electronic ballasts.

(393) Vertical lumens. Horizontal lumens 6%–10% lower.

(394) To maintain color consistency within 250K, group relamp at 7500 hours.

(396) UV filtered design (FadeBlock).

(397) Operate only on thermally protected ballasts.

(399) This product utilizes ALTO Lamp Technology. ALTO products pass the US EPA's Toxicity Characteristic Leaching Procedure (TCLP) for non-hazardous waste status.

(400) Energy-saver retrofit for 175W, M107 ballast.

(401) MasterColor Metal Halide Lamps are not recommended for use on dimmers and are not warranted if used on dimmer systems.

(402) Primarily used for sports-lighting applications. Life, initial and mean lumens are for horizontal operation. In vertical position and at 10 or more hours per start, lamp life is extended to 6000 hours, initial lumens are 170,000 and mean lumens are 136,000.

(405) 97% Lumen maintenance at 10% of rated average life. 93% lumen maintenance at 40% of rated average life.

(406) **CAUTION:** Beware of inadvertent circuit overload in new construction. Because of power factor of 0.57 in the ballast of the lamp, the lamp uses 0.36 amps.

(407) Operating Position is Universal, unless otherwise indicated. See Warnings, Cautions and Operating Instructions for further information.

(410) 30,000 horizontal application but 20,000 vertical application.

(411) 145W compatible with M57 probe start ballast. Also compatible with M152 pulse start ballasts.

(412) 205W compatible with M58 probe start ballast. Also compatible with M138 and M153 pulse start ballasts.

(413) 330W compatible with M59 probe start ballast. Also compatible with M128, M135, M155, and M172 pulse start ballasts

(431) 260W compatible with M154 and M132 pulse start ballasts.

(432) 860W compatible with M47 probe start ballast. Also compatible with M141 pulse start ballast.

WARNINGS for Protected Ceramic Metal Halide Lamps (Open or Enclosed Fixtures): MasterColor CDM Elite Medium Watt Ceramic Metal Halide T12, Energy Advantage Ceramic Metal Halide lamps with AllStart technology (Except ED 17 lamps), MasterColor Ceramic Metal Halide lamps ED17P, CDM R111, CDM PAR lamps.

I. RISK OF FIRE FROM RUPTURE OF ARC TUBE. This metal halide lamp contains an outer glass bulb and an internal arc-tube. The arc-tube operates under very high pressure and at very high temperatures that exceed 2192° F (1200° C). Because of the high internal operating pressure of the arc-tube, there is the potential for the arc-tube to rupture unexpectedly. If the arc-tube ruptures, the outer bulb may break and pieces of extremely hot glass can be discharged into the surrounding environment. If this rupture occurs, THERE IS A RISK OF PERSONAL INJURY, PROPERTY DAMAGE, BURNS AND FIRE. THIS RISK INCREASES WHEN A LAMP IS BURNED PAST ITS RATED LIFE AND, ACCORDINGLY, ALL OF THE OPERATING INSTRUCTIONS BELOW SHOULD BE CAREFULLY FOLLOWED TO MINIMIZE THESE RISKS.

TO REDUCE THE RISKS ASSOCIATED WITH A RUPTURED ARC TUBE:

1. Do not use these lamps near flammable or combustible material. Materials that can ignite should not be stored underneath the lamps. For example, in warehouse locations, locate luminaires containing these lamps over the center of aisles, not over products.
2. Before lamp installation/replacement, shut power off and allow lamp and fixture to cool to avoid electrical shock and potential burn hazards.
3. Do not use the lamp past its rated life. (See packaging or catalogue for rated life). Allowing lamps to operate until they fail is not safe and will increase the possibility of inner arc-tube rupture.

4. Relamp fixtures at or before the end of rated life. Lamps should be replaced as a group, not individually.
5. Periodically inspect the outer envelope of the lamp. Replace any lamps that show scratches, cracks or damage. Do not operate the lamp if it is broken or cracked.
6. Operate the lamp only with a compatible ballast and fixture. You should use only auxiliary equipment meeting Philips and/or ANSI standards. Use within voltage limits recommended by the ballast manufacturer, and operate the lamp only within specified limits of operation.
7. Operate the lamp only in the designated operating position.
8. Do not expose the lamp, its base or its socket to moisture.
9. Electrically insulate any metal support in contact with the outer bulb to avoid glass decomposition.

R“WARNING: These lamps can cause serious skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available.” This lamp complies with FDA radiation performance standard 21 CFR subchapter J. (USA:21CFR 1040.30 Canada:SOR/DORS/80-381)

IF THE OUTER BULB IS BROKEN OR PUNCTURED, TURN OFF AT ONCE AND REPLACE THE LAMP TO AVOID POSSIBLE INJURY FROM HAZARDOUS SHORT WAVE ULTRAVIOLET RADIATION.

III. ELECTRICAL SHOCK AND BURN HAZARD. Do not remove or install the lamp while the power is on. Allow the lamp and fixture to cool before removing the lamp.

IV. BROKEN ARC TUBE. Take care in handling and disposing of lamps. If an arc-tube is broken, avoid skin contact with any of the contents or fragments.

WARNINGS for Ceramic Metal Halide Lamps (Enclosed Fixtures Only): Single Ended CDM-T G12, CDM-TC G8.5, CDM-Tm GU6.5, CDM-Tm PGJ5, CDM-TD RX7, CDM Elite Medium Wattage Ceramic Metal Halide T9 lamps, Energy Advantage Ceramic Metal Halide Lamps with AllStart Technology ED17 lamps, MasterColor Ceramic Metal Halide Lamps, ED17, ED23.5 and ED28, CosmoWhite Lamps

I. RISK OF FIRE FROM RUPTURE OF ARC TUBE. This metal halide lamp contains an outer glass bulb and an internal arc-tube. The arc-tube operates under very high pressure and at very high temperatures that exceed 2192° F (1200° C). Because of the high internal operating pressure of the arc-tube, there is the potential for the arc-tube to rupture unexpectedly. If the arc-tube ruptures, the outer bulb may break and pieces of extremely hot glass can be discharged into the surrounding environment. If this rupture occurs, THERE IS A RISK OF PERSONAL INJURY, PROPERTY DAMAGE, BURNS AND FIRE. THIS RISK INCREASES WHEN A LAMP IS BURNED PAST ITS RATED LIFE AND, ACCORDINGLY, ALL OF THE OPERATING INSTRUCTIONS BELOW SHOULD BE CAREFULLY FOLLOWED TO MINIMIZE THESE RISKS.

TO REDUCE THE RISKS ASSOCIATED WITH A RUPTURED ARC TUBE:

1. Only operate lamp in an enclosed fixture with a lens/diffuser material able to contain hot lamp fragments in the event of an arc tube rupture. If you are uncertain, contact your fixture manufacturer.
2. Do not use these lamps near flammable or combustible material. Materials that can ignite should not be stored underneath the lamps. For example, in warehouse locations, locate luminaires containing these lamps over the center of aisles, not over products.
3. Before lamp installation/replacement, shut power off and allow lamp and fixture to cool to avoid electrical shock and potential burn hazards.

4. Do not use the lamp past its rated life. (See packaging or catalogue for rated life). Allowing lamps to operate until they fail is not safe and will increase the possibility of inner arc-tube rupture.
5. Relamp fixtures at or before the end of rated life. Lamps should be replaced as a group, not individually.
6. Cycle the lamps by turning them off at least once a week for at least 15 minutes. Failure to turn off the lamps for the minimum recommended period can increase the possibility of an arc-tube rupture. Turning off the lamps for this period helps to cause lamps near the end-of-life to fail benignly.
7. Periodically inspect the outer envelope of the lamp. Replace any lamps that show scratches, cracks or damage. Do not operate the lamp if it is broken or cracked.
8. Operate the lamp only with a compatible ballast and fixture. You should use only auxiliary equipment meeting Philips and/or ANSI standards. Use within voltage limits recommended by the ballast manufacturer, and operate the lamp only within specified limits of operation.
9. Operate the lamp only in the designated operating position.
10. Do not expose the lamp, its base or its socket to moisture.
11. Electrically insulate any metal support in contact with the outer bulb to avoid glass decomposition.

IN ORDER TO ACHIEVE AN ADDITIONAL MEASURE OF PROTECTION, LAMPS THAT ARE DESIGNED TO CONTAIN ALL THE GLASS PARTICLES FROM AN ARC TUBE RUPTURE ARE COMMERCIALY AVAILABLE FROM PHILIPS LIGHTING NORTH AMERICA CORPORATION.

R“WARNING: These lamps can cause serious skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available.” This lamp complies with FDA radiation performance standard 21 CFR subchapter J. (USA:21CFR 1040.30 Canada:SOR/DORS/80-381)

IF THE OUTER BULB IS BROKEN OR PUNCTURED, TURN OFF AT ONCE AND REPLACE THE LAMP TO AVOID POSSIBLE INJURY FROM HAZARDOUS SHORT WAVE ULTRAVIOLET RADIATION.

III. ELECTRICAL SHOCK AND BURN HAZARD. Do not remove or install the lamp while the power is on. Allow the lamp and fixture to cool before removing the lamp.

IV. BROKEN ARC TUBE. Take care in handling and disposing of lamps. If an arc-tube is broken, avoid skin contact with any of the contents or fragments.

High Intensity Discharge Lamps

Warnings

WARNINGS for All Quartz Metal Halide Protected Lamps (Open or Enclosed Fixtures): Protected Standard and Pulse Start Quartz Metal Halide Lamps

I. RISK OF FIRE FROM RUPTURE OF ARC TUBE. This metal halide lamp contains an outer glass bulb and an internal arc-tube. The arc-tube operates under very high pressure and at very high temperatures that exceed 2012° F (1100° C). Because of the high internal operating pressure of the arc-tube, there is the potential for the arc-tube to rupture unexpectedly. If the arc-tube ruptures, the outer bulb may break and pieces of extremely hot glass can be discharged into the surrounding environment. If this rupture occurs, THERE IS A RISK OF PERSONAL INJURY, PROPERTY DAMAGE, BURNS AND FIRE. THIS RISK INCREASES WHEN A LAMP IS BURNED PAST ITS RATED LIFE AND, ACCORDINGLY, ALL OF THE OPERATING INSTRUCTIONS BELOW SHOULD BE CAREFULLY FOLLOWED TO MINIMIZE THESE RISKS.

TO REDUCE THE RISKS ASSOCIATED WITH A RUPTURED ARC TUBE:

1. Do not use these lamps near flammable or combustible material. Materials that can ignite should not be stored underneath the lamps. For example, in warehouse locations, locate luminaries containing these lamps over the center of aisles, not over products.
2. Before lamp installation/replacement, shut power off and allow lamp and fixture to cool to avoid electrical shock and potential burn hazards.
3. Do not use the lamp past its rated life. (See packaging or catalogue for rated life). Allowing lamps to operate until they fail is not safe and will increase the possibility of inner arc-tube rupture.

4. Relamp fixtures at or before the end of rated life. Lamps should be replaced as a group, not individually.
5. Periodically inspect the outer envelope of the lamp. Replace any lamps that show scratches, cracks or damage. Do not operate the lamp if it is broken or cracked.
6. Operate the lamp only with a compatible ballast and fixture. You should use only auxiliary equipment meeting Philips and/or ANSI standards. Use within voltage limits recommended by the ballast manufacturer, and operate the lamp only within specified limits of operation.
7. Operate the lamp only in the designated operating position.
8. Do not expose the lamp, its base or its socket to moisture.
9. Electrically insulate any metal support in contact with the outer bulb to avoid glass decomposition.

R“WARNING: These lamps can cause serious skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available.” This lamp complies with FDA radiation performance standard 21 CFR subchapter J. (USA:21CFR 1040.30 Canada:SOR/DORS/80-381)

IF THE OUTER BULB IS BROKEN OR PUNCTURED, TURN OFF AT ONCE AND REPLACE THE LAMP TO AVOID POSSIBLE INJURY FROM HAZARDOUS SHORT WAVE ULTRAVIOLET RADIATION.

III. ELECTRICAL SHOCK AND BURN

HAZARD. Do not remove or install the lamp while the power is on. Allow the lamp and fixture to cool before removing the lamp.

IV. BROKEN ARC TUBE. Take care in handling and disposing of lamps. If an arc-tube is broken, avoid skin contact with any of the contents or fragments.

WARNINGS for Quartz Metal Halide Lamps (Enclosed fixtures only): Standard and Pulse Start Metal Halide Lamps

I. RISK OF FIRE FROM RUPTURE OF ARC TUBE. This metal halide lamp contains an outer glass bulb and an internal arc-tube. The arc-tube operates under very high pressure and at very high temperatures that exceed 2012° F (1100° C). Because of the high internal operating pressure of the arc-tube, there is the potential for the arc-tube to rupture unexpectedly. If the arc-tube ruptures, the outer bulb may break and pieces of extremely hot glass can be discharged into the surrounding environment. If this rupture occurs, THERE IS A RISK OF PERSONAL INJURY, PROPERTY DAMAGE, BURNS AND FIRE. THIS RISK INCREASES WHEN A LAMP IS BURNED PAST ITS RATED LIFE AND, ACCORDINGLY, ALL OF THE OPERATING INSTRUCTIONS BELOW SHOULD BE CAREFULLY FOLLOWED TO MINIMIZE THESE RISKS.

TO REDUCE THE RISKS ASSOCIATED WITH A RUPTURED ARC TUBE:

1. Only operate lamp in an enclosed fixture with a lens/diffuser material able to contain hot lamp fragments in the event of an arc tube rupture. If you are uncertain, contact your fixture manufacturer.
2. Do not use these lamps near flammable or combustible material. Materials that can ignite should not be stored underneath the lamps. For example, in warehouse locations, locate luminaries containing these lamps over the center of aisles, not over products.
3. Before lamp installation/replacement, shut power off and allow lamp and fixture to cool to avoid electrical shock and potential burn hazards.

4. Do not use the lamp past its rated life. (See packaging or catalogue for rated life). Allowing lamps to operate until they fail is not safe and will increase the possibility of inner arc-tube rupture.
5. Relamp fixtures at or before the end of rated life. Lamps should be replaced as a group, not individually.
6. Cycle the lamps by turning them off at least once a week for at least 15 minutes. Failure to turn off the lamps for the minimum recommended period can increase the possibility of an arc-tube rupture. Turning off the lamps for this period helps to cause lamps near the end-of-life to fail benignly.
7. Periodically inspect the outer envelope of the lamp. Replace any lamps that show scratches, cracks or damage. Do not operate the lamp if it is broken or cracked.
8. Operate the lamp only with a compatible ballast and fixture. You should use only auxiliary equipment meeting Philips and/or ANSI standards. Use within voltage limits recommended by the ballast manufacturer, and operate the lamp only within specified limits of operation.
9. Operate the lamp only in the designated operating position.
10. Do not expose the lamp, its base or its socket to moisture.
11. Electrically insulate any metal support in contact with the outer bulb to avoid glass decomposition.

IN ORDER TO ACHIEVE AN ADDITIONAL MEASURE OF PROTECTION, LAMPS THAT ARE DESIGNED TO CONTAIN ALL THE GLASS PARTICLES FROM AN ARC TUBE RUPTURE ARE COMMERCIALY AVAILABLE FROM PHILIPS LIGHTING NORTH AMERICA CORPORATION.

R“WARNING: These lamps can cause serious skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available.” This lamp complies with FDA radiation performance standard 21 CFR subchapter J. (USA:21CFR 1040.30 Canada:SOR/DORS/80-381)

IF THE OUTER BULB IS BROKEN OR PUNCTURED, TURN OFF AT ONCE AND REPLACE THE LAMP TO AVOID POSSIBLE INJURY FROM HAZARDOUS SHORT WAVE ULTRAVIOLET RADIATION.

III. ELECTRICAL SHOCK AND BURN

HAZARD. Do not remove or install the lamp while the power is on. Allow the lamp and fixture to cool before removing the lamp.

IV. BROKEN ARC TUBE. Take care in handling and disposing of lamps. If an arc-tube is broken, avoid skin contact with any of the contents or fragments.

OPERATING INSTRUCTIONS for MasterColor Integrated PAR 38 Lamps

LAMP OPERATING INSTRUCTIONS:

1. At high lighting levels or when illuminating light-sensitive materials the use of an extra UV filter is recommended.
2. Time should be allowed for lamps to stabilize in color when turned on for the first time. This may require several hours of operation, with more than one start. Lamp color is also subject to change under conditions of excess vibration or shock, and color appearance may vary between individual lamps.
3. Lamps may require up to 10 minutes to re-light if there is a power interruption.
4. Do not operate with an additional ballast, since a ballast is integrated in the lamp itself.
5. **Do not use in totally enclosed recessed fixtures.**
6. Take care in handling and disposing of lamps. If an arc tube is broken, avoid skin contact with any of the contents or fragments.
7. Lamp should not be used with dimmers. These lamps may be used in open fixtures.

**Hg—LAMP CONTAINS MERCURY
Manage in Accord with Disposal Laws
See: www.lamprecycle.org or 1-800-555-0050**

OPERATING INSTRUCTIONS for MasterColor (Elite) Ceramic Metal Halide Lamps: Single Ended CDM-T G12, CDM-T Warm G12, CDM-T Fresh G12, CDM-TC G8.5, CDM-Tm GU6.5 and CDM-Tm PGJ5 (Universal); Double-Ended CDM-TD RX7 (Horizontal ± 45°, Enclosed Fixtures Only)

LAMP OPERATING INSTRUCTIONS:

1. Use only in fully enclosed fixtures capable of withstanding particles of glass having temperatures up to 1000°C. Lens/diffuser material must be heat resistant. Consult fixture manufacturer regarding the suitability of the fixture for this lamp.
2. Do not operate a fixture with a missing or broken lens/diffuser. At high lighting levels or when illuminating light-sensitive materials the use of an extra UV filter is recommended.
3. Operate lamp only within specified limits of operating position. When inserting a new CDM-Tm lamp, twist the lamp 45° clock-wise in the holder to ensure proper electrical and mechanical connection.
4. Use only auxiliary equipment meeting Philips and/or ANSI standards. Use within voltage limits recommended by ballast manufacturer.
5. Operate lamp only within specified limits of operation.
6. For total supply load refer to ballast manufacturers electrical data.
7. **C. Operate CDM-T (G12 base) lamps only on thermally protected ballasts.**
8. **D. Operate CDM-TC lamps (G8.5 base) and CDM-Tm (PGJ5 and GU6.5 base) only on thermally protected electronic ballasts.**
9. **E. Operate CDM-T (G12 base) 39W/842, CDM-T Fresh (G12 Base), CDM-T Warm (G12 Base) and CDM-T (G12 base) Elite only on thermally protected electronic ballasts.**
5. If a lamp bulb support is used, be sure to insulate the support electrically to avoid possible decomposition of the bulb glass.
6. Time should be allowed for lamps to stabilize in color when turned on for the first time. This may require several hours of operation, with more than one start. Lamp color is also subject to change under conditions of excess vibration or shock and color appearance may vary between individual lamps.
7. Lamps may require 4–8 minutes (10–15 minutes for CDM-Tm) to re-light if there is a power interruption.
8. Take care in handling and disposing of lamps. If an arc tube is broken, avoid skin contact with any of the contents or fragments.

OPERATING INSTRUCTIONS for MasterColor CDM Elite Medium Watt Ceramic Metal Halide Tubular Single-Ended T9 and T12 Lamps

LAMP OPERATING INSTRUCTIONS:

1. If the lamp is marked on the base with /E, use only in enclosed fixture capable of withstanding particles of glass having temperatures up to 2192°F (1200°C). Lens/diffuser material must be heat resistant. Consult fixture manufacturer regarding the suitability of the fixture for this lamp.
2. Use only auxiliary equipment meeting Philips and/or ANSI standards. Use within voltage limits recommended by ballast manufacturer:
 - A. Operate lamp only within specified limits of operation.
 - B. For total supply load refer to ballast manufacturers electrical data.
 - C. All Pulse Start lamps require a socket rated to withstand a 4,000 volt pulse.
3. If a lamp bulb support is used, be sure to insulate the support electrically to avoid possible decomposition of the bulb glass.
4. Time should be allowed for lamps to stabilize in color when turned on for the first time. This may require several hours of operation, with more than one start. Lamp color is also subject to change under conditions of excess vibration or shock, and color appearance may vary between individual lamps.
5. Lamps may require 10 minutes to re-light if there is a power interruption.
6. Take care in handling and disposing of lamps. If an arc tube is broken, avoid skin contact with any of the contents or fragments.
7. Use this lamp only in fixtures that contain a Pulse Start metal halide ballast and are specifically designed for use with Pulse Start metal halide lamps.
8. If a lamp is shipped individually by itself, please pack the lamp with sufficient cushioning materials to prevent damage to the internal structure of the lamp. Failure to pack an individual lamp properly could lead to short life and early failure.

Until the lamp has achieved at least 10 hours of operation, the lamp should never be turned OFF sooner than 2 minutes, including during installation test. In case that this has happened, you have to wait 1 hour before switching on again. Failure to comply with this requirement may lead to ignition problems.

High Intensity Discharge Lamps

Operating Instructions

OPERATING INSTRUCTIONS for Energy Advantage Ceramic Metal Halide lamps with AllStart Technology, ED17 Lamps (Enclosed Fixtures); Energy Advantage CMH lamps with AllStart Technology (Open or Enclosed Fixtures); Energy Advantage CDM Long Life Lamp with AllStart Technology (Open or Enclosed Fixtures)

This lamp contains a Kr-85 and is distributed by Philips Lighting Company, a division of Philips Electronics North America Corporation, Somerset, New Jersey, 08873.

LAMP OPERATING INSTRUCTIONS:

- I. Use only auxiliary equipment meeting Philips and/or ANSI standards. Use within voltage limits recommended by ballast manufacturer.
 - A. Operate lamp only within specified limits of operation.
 - B. For total supply load refer to ballast manufacturers electrical data.
- C. These lamps can be used in both Probe Start and Pulse Start Magnetic ballast. Reference the technical data sheet for proper ANSI ballast code compatibility. Do not operate lamps on electronic ballasts.
- D. All Pulse Start mogul based lamps require a socket rated to withstand a 4000 volt pulse.
2. If a lamp bulb support is used, be sure to insulate the support electrically to avoid possible decomposition of the bulb glass.
3. Time should be allowed for lamps to stabilize in color when turned on for the first time. This may require several hours of operation, with more than one start. Lamp color is also subject to change under conditions of excess vibration or shock, and color appearance may vary between individual lamps.
4. Lamps may require 10 to 15 minutes to re-light if there is a power interruption. Less than 10 minutes on pulse start ballasts.
5. Take care in handling and disposing of lamps. If an arc tube is broken, avoid skin contact with any of the contents or fragments.

OPERATING INSTRUCTIONS for Protected MasterColor Ceramic Metal Halide PAR, MasterColor Ceramic Metal Halide MR16 Elite, and CDM-R111 Lamps (Open or Enclosed Fixtures)

LAMP OPERATING INSTRUCTIONS:

- I. Use only auxiliary equipment meeting Philips and/or ANSI standards. Use within voltage limits recommended by ballast manufacturer.
 - A. Operate lamp only within specified limits of operation.
 - B. For total supply load refer to ballast manufacturers electrical data.
- C. Operate PAR20 3000K and PAR30L 3000K lamps only on thermally protected ballast.**
- D. Operate 20W PAR20 3000K and 20W PAR30L 3000K lamps only on thermally protected electronic ballast.**
- E. Operate PAR20 4000K and PAR30L 4000K lamps only on thermally protected electronic ballast.**
- F. Operate CDM-R111 lamps only on thermally protected electronic ballast.**
- G. Operate CDM PAR30L Elite and CDM MR16 Elite lamps only on thermally protected electronic ballast.**
2. If a lamp bulb support is used, be sure to insulate the support electrically to avoid possible decomposition of the bulb glass.
3. Time should be allowed for lamps to stabilize in color when turned on for the first time. This may require several hours of operation, with more than one start. Lamp color is also subject to change under conditions of excess vibration or shock, and color appearance may vary between individual lamps.
4. Lamps may require up to 10 minutes (4-8 minutes for CDM-R111) to re-light if there is a power interruption.
5. Take care in handling and disposing of lamps. If an arc tube is broken, avoid skin contact with any of the contents or fragments.
6. For proper installation and removal, lamp should be handled by the sides of the reflector and not by the aluminum front anti-glare cap.

OPERATING INSTRUCTIONS for MasterColor Ceramic Metal Halide Lamps ED17 and ED28(Enclosed Fixtures); Protected MasterColor Ceramic Metal Halide Lamps ED17P (Open or Enclosed Fixtures)

LAMP OPERATING INSTRUCTIONS:

- I. Use only auxiliary equipment meeting Philips and/or ANSI standards. Use within voltage limits recommended by ballast manufacturer.
 - A. Operate lamp only within specified limits of operation.
 - B. For total supply load refer to ballast manufacturers electrical data.
2. If a lamp bulb support is used, be sure to insulate the support electrically to avoid possible decomposition of the bulb glass.
3. Time should be allowed for lamps to stabilize in color when turned on for the first time. This may require several hours of operation, with more than one start. Lamp color is also subject to change under conditions of excess vibration or shock and color appearance may vary between individual lamps.
4. Lamps may require 4 to 8 minutes to re-light if there is a power interruption.
5. Take care in handling and disposing of lamps. If an arc tube is broken, avoid skin contact with any of the contents or fragments.

OPERATING INSTRUCTIONS for Philips MasterColor Ceramic Metal Halide Pulse Start ED 23½ Lamps featuring ALTO Lamp Technology (For Enclosed Fixtures Only)

LAMP OPERATING INSTRUCTIONS:

1. Use only in an enclosed fixture capable of withstanding particles of glass having temperatures up to 2192°F (1200°C).

2. Use only auxiliary equipment meeting Philips and/or ANSI standards. Use within voltage limits recommended by ballast manufacturer.

- A. Operate lamp only within specified limits of operation.
- B. For total supply load refer to ballast manufacturers electrical data.
- C. All Pulse Start lamps require a socket rated to withstand a 4000 Volt pulse.

3. If a lamp bulb support is used, be sure to insulate the support electrically to avoid possible decomposition of the bulb glass.

4. Time should be allowed for lamps to stabilize in color when turned on for the first time. This may require several hours of operation, with more than one start. Lamp color is also subject to change under conditions of excess vibration or shock, and color appearance may vary between individual lamps.

5. Lamps may require 10 to 15 minutes to re-light if there is a power interruption.

6. Take care in handling and disposing of lamps. If an arc tube is broken, avoid skin contact with any of the contents or fragments.

7. Use this lamp only in a fixture that contains a Pulse Start metal halide ballast and is specifically designed for use with Pulse Start metal halide lamps.

OPERATING INSTRUCTIONS CosmoWhite Lamp (For Enclosed Fixtures Only)

LAMP OPERATING INSTRUCTIONS:

1. Use only in an enclosed fixture capable of withstanding particles of glass having temperatures up to 2192°F (1200°C).

2. Use only auxiliary equipment meeting Philips and/or ANSI standards. Use within voltage limits recommended by ballast manufacturer.

- A. Operate lamp only within specified limits of operation.
- B. For total supply load refer to ballast manufacturer's electrical data.
- C. All CosmoWhite lamps require a PGZ12 socket rated to withstand a 5000 Volt pulse.

3. If a lamp bulb support is used, be sure to insulate the support electrically to avoid possible decomposition of the bulb glass.

4. Time should be allowed for lamps to stabilize in color when turned on for the first time. This may require several hours of operation, with more than one start. Lamp color is also subject to change under conditions of excess vibration or shock, and color appearance may vary between individual lamps.

5. Lamps may require 10 to 15 minutes to re-light if there is a power interruption.

6. Take care in handling and disposing of lamps. Don't break the outer bulb of an end of life lamp. If an arc tube is broken, avoid skin contact with any of the contents or fragments.

6. Use this lamp only in a fixture that contains an Advance CosmoWhite electronic low frequency square wave ballast.

7. When inserting a new lamp, hold it by the quartz bulb, not by the metal lamp base; twist the lamp 45° clockwise in the lamp holder to ensure proper electrical and mechanical connection.

8. Store the lamps in cool and dry conditions to prevent the oxidation of the exterior metal parts.

OPERATING INSTRUCTIONS for Pulse Start Metal Halide Lamps (Base Up Operation ±15° Unless Otherwise Noted; Enclosed Fixtures Only)

LAMP OPERATING INSTRUCTIONS:

1. Use only in an enclosed fixture capable of withstanding particles of glass having temperatures up to 1000°C, unless otherwise noted.

2. Use only auxiliary equipment meeting Philips and/or ANSI standards. Use within voltage limits recommended by ballast manufacturer.

- A. Operate lamp only within specified limits of operation.
- B. For total supply load refer to ballast manufacturers electrical data.
- C. All Pulse Start mogul based lamps require a socket rated to withstand a 4000 volt pulse.

3. If a lamp bulb support is used, be sure to insulate the support electrically to avoid possible decomposition of the bulb glass.

4. Protect lamp base, socket and wiring against moisture, corrosive atmospheres and excessive heat.

5. Time should be allowed for lamps to stabilize in color when turned on for the first time. This may require several hours of operation, with more than one start. Lamp color is also subject to change under conditions of excess vibration or shock and color appearance may vary between individual lamps.

6. Lamps may require 2 to 4 minutes to relight if there is a power interruption.

7. Take care in handling and disposing of lamps. If an arc tube is broken, avoid skin contact with any of the contents or fragments.

8. Use this lamp only in fixtures that contain a Pulse Start metal halide ballast and are specifically designed for use with Pulse Start metal halide lamps.

OPERATING INSTRUCTIONS for Protected Pulse Start Metal Halide Lamps (Base Up Operation ±15° Unless Noted; Open or Enclosed Fixtures)

LAMP OPERATING INSTRUCTIONS:

3. Use only auxiliary equipment meeting Philips and/or ANSI standards. Use within voltage limits recommended by ballast manufacturer.

- A. Operate lamp only within specified limits of operation.
- B. For total supply load refer to ballast manufacturers electrical data.
- C. All Pulse Start mogul based lamps require a socket rated to withstand a 4000 volt pulse.

5. If a lamp bulb support is used, be sure to insulate the support electrically to avoid possible decomposition of the bulb glass.

7. Time should be allowed for lamps to stabilize in color when turned on for the first time. This may require several hours of operation, with more than one start. Lamp color is also subject to change under conditions of excess vibration or shock and color appearance may vary between individual lamps.

8. Lamps may require 2 to 4 minutes to re-light if there is a power interruption.

9. Take care in handling and disposing of lamps. If an arc tube is broken, avoid skin contact with any of the contents or fragments.

10. Use this lamp only in fixtures that contain a Pulse Start metal halide ballast and are specifically designed for use with Pulse Start metal halide lamps.

High Intensity Discharge Lamps

Operating Instructions

OPERATING INSTRUCTIONS for Protected Metal Halide Lamps (Base Up Operation $\pm 15^\circ$ Unless Noted; Open or Enclosed Fixtures)

LAMP OPERATING INSTRUCTIONS:

1. Use only auxiliary equipment meeting Philips and/or ANSI standards. Use within voltage limits recommended by ballast manufacturer.
 - A. Operate lamp only within specified limits of operation.
 - B. For total supply load refer to ballast manufacturers electrical data.
2. If a lamp bulb support is used, be sure to insulate the support electrically to avoid possible decomposition of the bulb glass.
3. Time should be allowed for lamps to stabilize in color when turned on for the first time. This may require several hours of operation, with more than one start. Lamp color is also subject to change under conditions of excess vibration or shock and color appearance may vary between individual lamps.
4. Lamps may require 10 to 20 minutes to re-light if there is a power interruption.
5. Take care in handling and disposing of lamps. If an arc tube is broken, avoid skin contact with any of the contents or fragments.
6. Do not use this lamp:
 - A. In a fixture that contains a Pulse Start metal halide ballast.
 - B. In a fixture that is specifically designed for use with Pulse Start metal halide lamps. **Operation of these lamps on Pulse Start Metal Halide systems may increase the chance of an outer bulb rupture and pieces of extremely hot glass might be discharged into the surrounding environment.**

OPERATING INSTRUCTIONS for Standard Metal Halide Lamps (Enclosed Fixtures Only)

LAMP OPERATING INSTRUCTIONS:

1. **Use only in an enclosed fixture capable of withstanding particles of glass having temperatures up to 2012°F (1100°C).**
2. Use only auxiliary equipment meeting Philips and/or ANSI standards. Use within voltage limits recommended by ballast manufacturer.
 - A. Operate lamp only within specified limits of operation.
 - B. For total supply load refer to ballast manufacturers electrical data.
3. If a lamp bulb support is used, be sure to insulate the support electrically to avoid possible decomposition of the bulb glass.
4. Time should be allowed for lamps to stabilize in color when turned on for the first time. This may require several hours of operation, with more than one start. Lamp color is also subject to change under conditions of excess vibration or shock and color appearance may vary between individual lamps.
5. Lamps may require 10 to 20 minutes to re-light if there is a power interruption.
6. Take care in handling and disposing of lamps. If an arc tube is broken, avoid skin contact with any of the contents or fragments.
7. Do not use this lamp:
 - A. In a fixture that contains a Pulse Start metal halide ballast.

High Intensity Discharge Lamps

Warnings, Cautions and Operating Instructions

WARNINGS, CAUTIONS AND OPERATING INSTRUCTIONS for Ceramalux High Pressure Sodium Lamps

Warnings, Cautions and Operating Instructions

WARNING: These lamps must be operated in fixtures designed for use with High Pressure Sodium lamps. The fixture wattage rating must match the wattage indicated on the outer glass bulb. Do not scratch the outer bulb or subject it to pressure as this could cause the outer bulb to crack or shatter. A partial vacuum in the outer bulb may cause glass to fly if the glass is struck.

CAUTION: Operating the lamp improperly may result in **PERSONAL INJURY, PROPERTY DAMAGE, BURNS AND FIRE.**

1. If the outer glass bulb is broken, shut off power immediately and remove the lamp after it has cooled.

2. Use only auxiliary equipment meeting Philips and/or ANSI standards. Use within voltage limits recommended by ballast manufacturer.
 - A. Operate lamp only within specified limits of operation.
 - B. For total supply load refer to ballast manufacturers electrical data.
3. Protect lamp base, socket and wiring against moisture, corrosive atmospheres and excessive heat.
4. Replace the lamp if the outer glass bulb has been scratched, cracked or damaged in any way.
5. If a lamp bulb support is used, be sure to insulate the support electrically so as to avoid possible decomposition of the bulb glass.

6. Do not use this lamp in a fixture which redirects a substantial portion of the energy toward the arc tube and its immediate vicinity, as this may lead to very early lamp failure.
7. Take care in handling and disposing of lamps. If arc tube is broken, avoid skin contact with any of the contents or fragments.
8. The arc tube of this lamp contains sodium and mercury. Dispose of in accordance with federal, state and local requirements.

WARNINGS, CAUTIONS AND OPERATING INSTRUCTIONS for Low Pressure Sodium Lamps—SOX

Warnings, Cautions and Operating Instructions

WARNING: These lamps must be operated in fixtures designed for use with Low Pressure Sodium lamps. The fixture wattage rating must match the wattage indicated on the outer glass bulb. Do not scratch the outer bulb or subject it to pressure as this could cause the outer bulb to crack or shatter.

CAUTION: Operating the lamp improperly and not following operating instructions may result in **PERSONAL INJURY, PROPERTY DAMAGE, BURNS AND FIRE.**

1. If the outer glass bulb is broken, shut off power immediately and remove the lamp after it has cooled.
2. Use only auxiliary equipment meeting Philips and/or ANSI standards. Use within voltage limits recommended by ballast manufacturer.
 - A. Operate lamp only within specified limits of operation.
 - B. For total supply load refer to ballast manufacturers electrical data.
3. Protect lamp base, socket and wiring against moisture, corrosive atmospheres and excessive heat.
4. Replace the lamp if the outer glass bulb has been

scratched, cracked or damaged in any way.

5. Take care in handling and disposing of lamps. If arc tube is broken, avoid skin contact with any of the contents or fragments.
6. The arc tube of this lamp contains sodium. Sodium can generate a high degree of heat when exposed to water. Dispose of in accordance with federal, state and local requirements.

WARNINGS, CAUTIONS AND OPERATING INSTRUCTIONS for Mercury Vapor Lamps

Warnings, Cautions and Operating Instructions

WARNING: This lamp can cause serious skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available." This lamp complies with FDA radiation performance standard 21 CFR subchapter J, (USA:21 CFR 1040.30 Canada:SOR/DORS/80-381)

WARNING: The following **GOOD LAMP PRACTICES** are recommended to reduce the possibility of an arc tube rupture and the associated risk of property damage or personal injury.

GOOD LAMP PRACTICES:

1. **TURN LAMPS OFF AT LEAST ONCE PER WEEK FOR AT LEAST 15 MINUTES**, in systems which are otherwise operating on a continuous basis (24 hours/day-7 days/week).
2. **RELAMP FIXTURES AT OR BEFORE THE END OF RATED LIFE.** Allowing lamps to operate until they fail is not advised and may increase the possibility of inner arc tube rupture.
3. **OPERATE LAMP WITH PROPER CIRCUITS AND AUXILIARY EQUIPMENT.**

CAUTION: Electric discharge lamp—use only with proper circuits and auxiliary equipment designed to produce established electrical values for this lamp. Operating the lamp improperly may result in damage to equipment or personal injury, for which the lamp manufacturer does not assume any responsibility.

If a lamp bulb support is used, be sure to insulate the support electrically to avoid possible decomposition of the bulb glass. Do not scratch the bulb or subject it to pressure, as it could fail violently. If the outer bulb is broken, turn off the lamp and replace it promptly.

Do not use this lamp in a fixture which redirects a substantial portion of the energy toward the arc tube and its immediate vicinity, as this may lead to very early lamp failure.

NOTICE: For total supply load, add auxiliary (ballast) watts to lamp watts.

High Intensity Discharge Lamps

Warnings, Cautions and Operating Instructions

Philips		OSI		GE	
Ordering Code	ANSI Code	Order Code	ANSI	Description	ANSI
CDM20/TM/830/GU6.5 ELITE	C156/E	MC20TF/U/GU6.5/830	C156/E	CMH20T/U830GU6.5	C156/M156/E
CDM35/TM/930/GU6.5 ELITE	C130/E	MC39TF/U/GU6.5/830	C130/E	CMH39ULR930GU6.5	C130/M130/E
CDM50/TM/930/GU6.5 ELITE	C193/E				
CDM20/TM/830	C175/E				
CDM35/TM/930	C179/E				
CDM Elite 20/TC/830	C156/E	MC20TC/U/G8.5/830PB	C156/E	CMH20TCU830/G8.5	C156/M156/E
CDM Elite 35/TC/930	C130/E			CMH39/930G8.5ULR	C130/M130/E
CDM Elite35/TC/842	C130/E				
CDM Elite 50/TC/930	C193/E				
CDM Elite 70/TC/930	C139/E			CMH70U930G8.5ULR	C139/M139/E
CDM Elite70/TC/942	C139/E				
CDM35/TC/830	C130/E	MC39TC/U/G8.5/830PB	C130/E	CMH39TCU830/G8.5	C130/M130/E
CDM35/TC/842	C130/E			CMH39TCU942/G8.5	C130/M130/E
CDM70/TC/830	C139/E	MC70TC/U/G8.5/930PB	C139/E	CMH70TCU830G8.5	C139/M139/E
CDM70/TC/942	C139/E			CMH70TCU942/G8.5	C139/M139/E
CDM Elite 20/T6/830	C156/E				
CDM Elite 35/T6/930	C130/E	MC39T6/U/G12/930	C130/E	CMH39U930G12ULR	C130/M130/E
CDM Elite35/T6/842	C130/E				
CDM Elite 50/T6/930	C193/E				
CDM Elite50/T6/942	C193/E				
CDM Elite 70/T6/930	C139/E	MC70T6/U/G12/930PB	C139/E	CMH70U930G12ULR	C139/M139/E
CDM Elite70/T6/942	C139/E				
CDM Elite 100/T6/930	C191/E	MC100T6/U/G12/830	C191/E		
CDM35/T6/830	C130/E	MC39T6/U/G12/830PB	C130/E	CMH39TUVU830G12	C130/M130/E
CDM35/T6/842	C130/E	MC39T6/U/G12/940PB	C130/E	CMH39T/U/942/G12	C130/M130/E
CDM70/T6/830	C139/E	MC70T6/U/G12/830PB	C139/E	CMH70TU/830/G12	C139/M139/E
CDM70/T6/942	C139/E	MC70T6/U/G12/940PB	C139/E	CMH70TU/942/G12	C139/M139/E
CDM150/T6/830	C142/E	MC150T7.5/U/G12/830	C142/E	CMH150TU/830/G12	C142/M102/E
CDM150/T6/942	C142/E	MC150T7.5/U/G12/940PB	C142/E	CMH150TU/942/G12	C142/M102/E
CDM70/TD/830	C139/C85/E	MC70T6/DE/830PB	C139/E	CMH70/TD/830RX7S	M85/M139/E
CDM150/TD/830	C142/C102/C81E	MC150T7.5/DE/830PB	C102/E	CMH150TD830RX7S	M81/M142/E
CDM EliteMW/210/T9/930/U/E	C183/E				
CDM EliteMW/210/T9/942/U/E	C183/E				
CDM EliteMW/315/T9/930/U/E	C182/E				
CDM EliteMW/315/T9/942/U/E	C182/E				
CDM EliteMW 210/T12/930/U/O	C183/O				
CDM EliteMW 210/T12/942/U/O	C183/O				
CDM EliteMW 315/T12/930/U/O	C182/O				
CDM EliteMW 315/T12/942/U/O	C182/O				
CPO-T WHITE 45W/728					
CPO-T WHITE 60W/728	C187/E				
CPO-T WHITE 90W/728	C188/E				
CPO-T WHITE 140W/728	C189/E				
CPO-T WHITE 60W/840	C187/E				
CPO-T WHITE 90W/840	C188/E				
CPO-T WHITE 140W/840	C189/E				
CDM-i25W/830/PAR38/10/ALTO		MCP24EL/PAR38/U/830/SP10/ECO		CMHi23P38SP/ECO	
CDM-i25W/830/PAR38/25/ALTO		MCP24EL/PAR38/U/830/NFL25/ECO		CMHi23P38FL/ECO	
CDM-i25W/830/PAR38/40/ALTO		MCP24EL/PAR38/U/830/FL40/ECO		CMHi23P38WFL/ECO	
CDM-R111/20W/830 10DG	C175/O				
CDM-R111/35W/830 10DG	C130/O				
CDM-R111/35W/830 24DG	C130/O				
CDM-R111/35W/830 40DG	C130/O				
CDM-R111/70W/830 10DG	C139/O				
CDM-R111/70W/830 24DG	C139/O				
CDM-R111/70W/830 40DG	C139/O				

High Intensity Discharge Lamps

Cross Reference Guide

Philips		OSI		GE	
Ordering Code	ANSI Code	Order Code	ANSI	Description	
CDM-MR16/20W/830/10D ELITE	C156/O			CMH20MR16/830/SP	C156/M156/O
CDM-MR16/20W/830/25D ELITE	C156/O			CMH20MR16/830/FL	C156/M156/O
CDM-MR16/20W/830/40D ELITE	C156/O			CMH20MR16/830WFL	C156/M156/O
CDM-MR16/35W/930/10D ELITE	C130/O			CMH39MR16UL93/SP	C130/M130/O
CDM-MR16/35W/930/25D ELITE	C130/O			CMH39MR16UL93/FL	C130/M130/O
CDM-MR16/35W/930/40D ELITE	C130/O			CMH39MR16UL93/WFL	C130/M130/O
CDM-MR16/35W/930/10D ELITE	C130/O			CMH39MR16/930/SP	C130/M130/O
CDM-MR16/35W/930/25D ELITE	C130/O			CMH39MR16/930/FL	C130/M130/O
CDM-MR16/35W/930/40D ELITE	C130/O			CMH39MR16/930WFL	C130/M130/O
CDM-MR16/50W/930/25D ELITE	C193/O				
CDM-MR16/50W/930/40D ELITE	C193/O				
CDM20/PAR20/M/SP/3K/ALTO	C156/C175/O	MCP20PAR20/U/830/SP10/ECO PB	M156/O	CMH20PAR20/SP	C156/M156/O
CDM20/PAR20/M/FL/3K/ALTO	C156/C175/O	MCP20PAR20/U/830/FL/ECO PB	M156/O	CMH20PAR20/FL	C156/M156/O
CDM20/PAR30L/M/SP/3K/ALTO	C156/C175/O	MCP20PAR30LN/U/830/SP/ECOPB	M156/O	CMH20PAR30/SP10	C156/M156/O
CDM20/PAR30L/M/FL/3K/ALTO	C156/C175/O	MCP20PAR30LN/U/830/FL/ECOPB	M156/O	CMH20PAR30/FL25	C156/M156/O
CDM35/PAR20/M/SP/3K/ALTO	C130/O	MCP39PAR20/U/830/SPPB	M130/O	CMH39UPAR20SP10	C130/M130/O
CDM35/PAR20/M/FL/3K/ALTO	C130/O	MCP39PAR20/U/830/FLPB	M130/O	CMH39UPAR20FL25	C130/M130/O
CDM35/PAR20/M/SP/4K/ALTO	C130/O	MCP39PAR20/U/940/SP	M130/O	CMH39PAR20/NSP4K	C130/M130/O
CDM35/PAR20/M/FL/4K/ALTO	C130/O	MCP39PAR20/U/940/FL	M130/O	CMH39PAR20/FL4K	C130/M130/O
CDM35/PAR30L/M/SP/3K/ALTO	C130/O	MCP39PAR30LN/U/830/SP/ECOPB	M130/O	CMH39/PAR30LSP10	C130/M130/O
CDM35/PAR30L/M/FL/3K/ALTO	C130/O	MCP39PAR30LN/U/830/FL/ECOPB	M130/O	CMH39PAR30L/FL25	C130/M130/O
CDM70/PAR30L/M/SP/3K/ALTO	M143/M98/O	MCP70PAR30LN/U/930/SP/ECOPB	M139/O	CMH70PAR30L830SP	C139/M98/O
CDM70/PAR30L/M/FL/3K/ALTO	M143/M98/O	MCP70PAR30LN/U/930/FL/ECOPB	M139/O	CMH70PAR30L830FL	C139/M98/O
CDM70/PAR30L/M/SP/4K/ALTO	C139/O	MCP70PAR30LN/U/940/SP/ECO	M139/O		
CDM70/PAR30L/M/FL/4K/ALTO	C139/O	MCP70PAR30LN/U/940/FL/ECO	M139/O		
CDM70/PAR38/SP/3K/ALTO	M143/M98/O	MCP70PAR38/U/830/SP/ECOPB	M139/O	CMH70PAR38SP/ECO	C98/M139/M143/O
CDM70/PAR38/FL/3K/ALTO	M143/M98/O	MCP70PAR38/U/830/FL/ECOPB	M139/O	CMH70PAR38FL/ECO	C98/M139/M143/O
CDM70/PAR38/SP/4K/ALTO	M143/M98/O				
CDM70/PAR38/FL/4K/ALTO	M143/M98/O				
CDM100/PAR38/SP/3K/ALTO	M140/M90/O	MCPI00PAR38/U/830/SP/ECOPB	M90/O	CMH100PAR38SPECO	C90/M90/M140/O
CDM100/PAR38/FL/3K/ALTO	M140/M90/O	MCPI00PAR38/U/830/FL/ECOPB	M90/O	CMH100PAR38FLECO	C90/M90/M140/O
CDM100/PAR38/SP/4K/ALTO	M140/M90/O				
CDM100/PAR38/FL/4K/ALTO	M140/M90/O				
MHC50/U/MP/3K ELITE	M148/M110/O	MCP50/U/MED/830PB	C110/O		
MHC50/U/MP/4K/ALTO	M148/M110/O				
MHC70/U/MP/3K ELITE	M143/M98/O	MCP70/U/MED/830PB	C98/O	CMH70U830MED/O	M143/M98/C98/O
MHC70/C/U/MP/3K ELITE	M143/M98/O	MCP70/C/U/MED/830PB	C98/O	CMH70CU830MED/O	M143/M98/C98/O
MHC70/U/MP/4K/ALTO	M143/M98/O	MCP70/U/MED/940PB	C98/O	CMH70U942MED/O	M143/M98/C98/O
MHC70/C/U/MP/4K/ALTO	M143/M98/O	MCP70/C/U/MED/940PB	C98/O	CMH70CU942MED/O	M143/M98/C98/O
MHC100/U/MP/3K ELITE	M140/M90/O	MCPI00/U/MED/830PB	C90/O		
MHC100/C/U/MP/3K ELITE	M140/M90/O	MCPI00/C/U/MED/830PB	C90/O		
MHC100/U/MP/4K/ALTO	M140/M90/O	MCPI00/U/MED/940PB	C90/O		
MHC100/C/U/MP/4K/ALTO	M140/M90/O	MCPI00/C/U/MED/940PB	C90/O		
MHC150/U/MP/3K/ALTO	M142/M102/O	MCPI50/U/MED/830PB	C102/O	CMH150U830MED/O	C102/M142/O
MHC150/C/U/MP/3K/ALTO	M142/M102/O	MCPI50/C/U/MED/830PB	C102/O	CMH150CU830MED/O	C102/M142/O
MHC150/U/MP/4K/ALTO	M142/M102/O			CMH150U942MED/O	C102/M142/O
MHC150/C/U/MP/4K/ALTO	M142/M102/O			CMH150CU942MED/O	C102/M142/O
MHC50/U/M/3K ELITE	C148/C110/E				
MHC50/C/U/M/3K ELITE	C148/C110/E				
MHC50/U/M/4K/ALTO	M148/M110/E				
MHC50/C/U/M/4K/ALTO	M148/M110/E				
MHC70/U/M/3K ELITE	C143/C98/E	MC70/U/MED/830	C98/E	CMH70/U/830/MED	M139/M98/C98/E
MHC70/C/U/M/3K ELITE	C143/C98/E	MC70/C/U/MED/830	C98/E	CMH70/C/U/830MED	M139/M98/C98/E
MHC70/U/M/4K/ALTO	M143/M98/E	MC70/U/MED/940	C98/E		
MHC70/C/U/M/4K/ALTO	M143/M98/E	MC70/C/U/MED/940	C98/E		
MHC100/U/M/3K ELITE	C140/C90/E	MC100/U/MED/830	C90/E	CMH100/U/830/MED	C90/M90/M140/E

High Intensity Discharge Lamps

Cross Reference Guide

Philips		OSI		GE	
Ordering Code	ANSI Code	Order Code	ANSI	Description	
MHC100/C/U/M/3K ELITE	C140/C90/E	MC100/C/U/MED/830	C90/E	CMH100/C/U830MED	C90/M90/M140/E
MHC100/U/M/4K/ALTO	M140/M90/E	MC100/U/MED/940	C90/E		
MHC100/C/U/M/4K/ALTO	M140/M90/E	MC100/C/U/MED/940	C90/E		
MHC100/U/ED28/HR/4K	M140/M90/E				
MHC150/U/M/3K/ALTO	M142/M102/E	MC150/U/MED/830	C102/E		
MHC150/C/U/3K/ALTO	M142/M102/E	MC150/C/U/MED/830	C102/E		
MHC150/U/M/4K/ALTO	M142/M102/E	MC150/U/MED/940	C102/E		
MHC150/C/U/M/4K/ALTO	M142/M102/E	MC150/C/U/MED/940	C102/E		
CDM70/U/PS/4K ALTO	M143/M98/E				
CDM100/U/PS/4K ALTO	M140/M90/E	MC100/U/ET23.5/942	C90/E		
CDM150/U/PS/4K ALTO	M142/M102/E	MC150/U/ET23.5/942	C102/E		
CDM145/U/M/4K/ED17 EA AllStart	C192/E				
CDM145/C/U/M/4K/ED17 EA AllStart	C192/E				
CDM145/U/O/4K/ED28 EA AllStart	C192/O				
CDM145/C/U/O/4K/ED28 EA AllStart	C192/O				
CDM205/U/O/4K EA AllStart	C184/O				
CDM205/C/U/O/4K EA AllStart	C184/O				
CDM260/U/O/4K EA AllStart	C195/O				
CDM260/C/U/O/4K EA AllStart	C195/O				
CDM330/U/O/4K/ED28 EA AllStart	C185/O				
CDM330/U/O/4K EA AllStart	C185/O				
CDM330/C/U/O/4K EA AllStart	C185/O				
CDM860/V/O/4K/EA BT37	C194/O				
CDM860/V/O/4K/EA BT56	C194/O				
CDM330/V/O/4K EA AllStart XL	C185/O				
MP175/BU/PS	M152/M137/O			MPR175/VBU/PA/O	M137/O
MP250/BU/PS	M153/M138/O	MP250/PS/BU-ONLY	M153/O	MPR250/VBU/PA/O	M138/O
MP320/BU/PS	M154/M132/O			MPR320/VBU/XHOPA	M132/M154/O
MP320/C/BU/PS	M154/M132/O			MPR320C/VBUXHOPA	M132/M154/O
MP350/BU/PS	M131/O	MP350/400/PS/BU-ONLY	M131/O	MPR350/VBU/PA	M131/O
MP400/BU/PS	M155/M128/M135/O	MP350/400/PS/BU-ONLY	M155/O	MPR400/VBU/XHOPA	M135/M155/O
MP400/C/BU/PS	M155/M128/M135/O	MP350/400/C/PS/BU-ONLY	M155/O	MPR400C/VBUXHOPA	M135/M155/O
MP750/BU/PS	M149/O				
MH70/U/M/PS	M98/E	M70/U/MED	M98/E	MVR70/U/MED	M98/E
MH100/U/M/PS	M90/E	M100/U/MED	M90/E	MVR100/U/MED	M90/E
MH150/U/M/PS	M102/E	M150/U/MED	M102/E	MVR150/U/MED	M102/E
MS175/M/BU/PS	M152/M137/E	MS175/PS/BU-ONLY/MED	M152/E	MVR175/VBU/MEDPA	M137/M152/E
MS175/BU/PS	M152/M137/E	MS175/PS/BU-ONLY	M152/E	MVR175/VBU/PA	M137/M152/E
MS175/HOR/PS	M152/M137/E				
MS200/BU/PS	M136/E	MS200/PS/BU-ONLY/BT28	M136/E		
MS250/U/PS	M153/M138/E	M250/PS/U	M153/E	MVR250/U/PA	M138/M153/E
MS250/BU/PS	M153/M138/E	MS250/PS/BU-ONLY	M153/E	MVR250/VBU/PA	M138/M153/E
MS320/U/PS	M154/M132/E	MS320/PS/BU-HOR	M154/E	MVR320/VBU/HO/PA	M132/M154/E
MS350/BU/PS	M131/E			MVR350VBUXHOPA/E	M131/E
MS400/BU/ED28/PS	M155/M128/M135/E	MS400/PS/BU-ONLY/BT28	M155/E	MVR400/VBUED28PA	M135/M155/E
MS400/HOR/ED28/PS	M155/M128/M135/E			MVR400/HOR/ED28/PA	M135/M155/E
MS400/U/PS	M155/M135/M128/E			MVR400/HOR/PA	M135/M155/E
MS750/BU/BT37/PS	M149/E	MS750/PS/BU-HOR/BT37	M149/E	MVR750/VBU/PA	M149/E
MS750/HOR/BT37/PS	M149/E	MS750/PS/BU-HOR/BT37	M149/E		
MS1000/BU/BT37/PS	M141/E	M1000/PS/U/BT37	M141/E	MVR1000U/BT37/PA	M141/E

High Intensity Discharge Lamps

Cross Reference Guide












Philips		OSI		GE	
Ordering Code	ANSI Code	Order Code	ANSI	Description	
MP175/BU	M57/O	MP175/BU-ONLY	M57/O	MPR175/VBU/O	M57/O
MP250/BU	M58/O	MP250/BU-ONLY	M58/O	MPR250/VBU/O	M58/O
MP360BU/EW	M165/M59/O	MSP360/SS/BU-ONLY	M59/O	MPR360VBUWM/HO/O	M59/O
MP360/C/BU/EW	M165/M59/O	MSP360/C/SS/BU-ONLY	M59/O	MPR360CVBUWMHO/O	M59/O
MP400/BU	M59/O	MP400/BU-ONLY	M59/O	MPR400/VBU/HO/O	M59/O
MP400/C/BU	M59/O	MP400/C/BU-ONLY	M59/O	MPR400C/VBU/HO/O	M59/O
MP1000/BU	M47/O	MP1000/BU-ONLY	M47/O	MPR1000/VBU/HO/O	M47/O
MH150/U/M	M107/E				
MH150/C/U/M	M107/E				
MH175/U/M	M57/E	M175/U/MED	M57/E	MVR175/U/MED	M57/E
MH175/C/U/M	M57/E	M175/C/U/MED	M57/E	MVR175/C/U/MED	M57/E
MH175/U	M57/E	M175/U	M57/E	MVR175/U	M57/E
MH175/C/U	M57/E	M175/C/U	M57/E	MVR175/C/U	M57/E
MH250/U	M58/E	M250/U	M58/E	MVR250/U	M58/E
MH250/C/U	M58/E	M250/C/U	M58/E	MVR250/C/U	M58/E
MH400/U/ED28	M59/E	M400/U/BT28	M59/E	MVR400/U/ED28	M59/E
MH400/U	M59/E	M400/U	M59/S	MVR400/U	M59/S
MH400/C/U	M59/E	M400/C/U	M59/S	MVR400/C/U	M59/S
MH1000/U/BT37	M47/E	M1000/U/BT37	M47/E	MVR1000/U/BT37	M47/E
MH1000/U	M47/E	M1000/U	M47/S	MVR1000/U	M47/S
MH1000/C/U	M47/E	M1000/C/U	M47/S	MVR1000/C/U	M47/S
MH1500/U	M48/E			MVR1500/U/SPORTS	M48/E
CDM-T FRESH 70W/740	C139/E				
CDM-T Warm 70W/925	C139/E				
SDW-T 100W/LV	S105				
SDW-TG 100W/T6/825	S167				
C35S76/M	S76	LU35/MED	S76	LU35/MED/ECO	S76/O
C50S68/M	S68	LU50/MED	S68	LU50/MED/ECO	S68/O
C50S68/ALTO	S68	LU50/ECO	S68	LU50/H/ECO	S68/O
C70S62/M	S62	LU70/MED	S62	LU70/MED/ECO	S62/O
C70S62/D/M	S62	LU70/D/MED	S62	LU70/D/MED/ECO	S62/O
C70S62/ALTO	S62	LU70/ECO	S62	LU70/H/ECO	S62/O
C100S54/M	S54S	LU100/MED	S54	LU100/MED/ECO	S54/O
C100S54/D/M	S54S	LU100/D/MED	S54	LU100/D/MED/ECO	S54/O
C100S54/ALTO	S54	LU100/ECO	S54	LU100/H/ECO	S54/O
C100S54/D/ALTO	S54	LU100/D	S54	LU100/D/H/ECO	S54/O
C150S55/M	S55	LU150/55/MED	S55	LU150/MED/ECO	S55/O
C150S55/D/M	S55	LU150/55/D/MED	S55	LU150/D/MED/ECO	S55/O
C150S55/ALTO	S55	LU150/55/ECO	S55	LU150/55/H/ECO	S55/O
C150S56/ALTO	S56	LU150/100	S56	LU150/100(ED28)	S56/O
C200S66/ALTO	S66MN-200	LU200/ECO	S66	LU200/H/ECO	S66/O
C250S50/ALTO	S50	LU250/ECO	S50	LU250/H/ECO	S50/O
C400S51/ALTO	S51	LU400/ECO	S51	LU400/H/ECO	S51/O
C600S106	S106	LU600 SUPER	S106	LU600/T	S106/O
C1000S52/ALTO	S52XB-1000	LU1000/ECO	S52	LU1000/ECO	S52/O
C1000S52/ED37	S52				
C70S62/ALTO NC HPS	S62	LU70/PLUS/ECO	S62	LU70/ECO/NC	S62/O
C100S54/ALTO NC HPS	S54	LU100/PLUS/ECO	S54	LU100/ECO/NC	S54/O
C150S55/ALTO NC HPS	S55	LU150/55/PLUS/ECO	S55	LU150/55/ECO/NC	S55/O
C200S66/ALTO NC HPS	S66	LU200/PLUS/ECO	S66	LU200/ECO/NC	S66/O
C250S50/ALTO NC HPS	S50	LU250/PLUS/ECO	S50	LU250/ECO/NC	S50/O
C400S51/ALTO NC HPS	S51	LU400/PLUS/ECO	S51	LU400/ECO/NC	S51/O
C1000S52/ALTO NC HPS	S52	LU1000/PLUS	S52		

High Intensity Discharge Lamps

Cross Reference Guide

Philips		OSI		GE	
Ordering Code	ANSI Code	Order Code	ANSI	Description	
C50S68/2	S68				
C70S62/2	S62	LU70/SBY	S62	LU70/SBY/XL	S62/O
C100S54/2	S54	LU100/SBY	S54	LU100/SBY/XL	S54/O
C150S55/2	S55	LU150/55/SBY	S55	LU150/55/SBY/XL	S55/O
C250S50/2	S50	LU250/SBY	S50	LU250/SBY/XL	S50/O
C400S51/2	S51	LU400/SBY	S51	LU400/SBY/XL	S51/O
C1000S52/2	S52	LU1000/SBY	S52	LU1000/SBY/XL	S52/O
SON AGRO 430W	S145/S51				
SON-T PIA Grn Pw/400W	S51	400W PLANTASTAR	S51	LU400/XOPSL/T/40	
SON-T PIA Grn Pw/600W/230V	S106	600W PLANTASTAR	S106	LU600/XOPSL/T/40	
SON-T PIA Grn Pw/600W/347V	S106				
SON-T PIA Grn Pw/600W/480V	S106				
C1000S52/AGROLITE XT	S52	LU1000/PLANTASTAR	S52		
GreenPower CDM-TP 315/T12/930/U/O	C182/O				
SOX-E18	L69	SOX18	L69		
SOX35	L70	SOX35	L70		
SOX55	L71	SOX55	L71		
SOX90	L72	SOX90	L72		
SOX135	L73	SOX135	L73		
SOX180	L74	SOX180	L74RF		
H38JA-100/DX	H38	H38JA-100/DX	H38	HR100DX38	
H38MP-100/DX	H38				
H39KB-175	H39	H39KB-175	H39	HR175A39	
H39KC-175/DX	H39	H39KC-175/DX	H39	HR175DX39	
H37KC-250/DX	H37	H37KC-250/DX	H37	HR250DX37	
H33GL-400/DX	H33	H33GL-400/DX	H33	HR400DX33	

Contents

	EcoVantage A-Shape Lamps Page 100		EcoVantage Decorative Page 100		Halogen PAR Lamps Page 101
	Halogen Energy Advantage Lamps Page 102		Halogen MR Lamps Page 104		ALR Lamps Page 105
	ALUline Pro III Lamps Page 105		Twistline GU10 Lamps Page 105		Single-Ended Linear Lamps Page 105
	Double- Ended Linear Lamps Page 106		Capsule Lamps Page 106		



Philips Halogen Lamps are designed to provide visual appeal, highlight merchandise and save on energy costs.





Put people and merchandise in the best light

The Philips Halogen lamp family is perfect for retail lighting. Halogen lamps provide bright, white light and help save on energy and maintenance costs.

Halogen Energy Advantage IR Plus Lamps provide the most enhanced features of our halogen lamp line. The double-ended burner with an IR coating optimizes lumen output. Therefore, you can use a lower wattage lamp to achieve energy savings and also get a longer rated average life than standard halogen equivalents.

EcoVantage Lamps are an elegant, energy saving alternative to ordinary household incandescent light. EcoVantage lamps are fully dimmable and meet the requirement of EISA 2007* legislation.

* Complies with the Energy Independence and Security Act of 2007 (Public Law 110-140). Section 321—Efficient Light Bulbs.

Current Product	Philips Upgrade Product	Benefit	Page
 <p>60W PAR38 Halogen</p>	 <p>Energy Advantage Halogen PAR38 IR Plus 39W</p>	<ul style="list-style-type: none"> • High quality light brings out colors and textures • High performance IR coating on a double-ended quartz burner • Increased uniform beam intensity without hot spots 	103
 <p>60W A19 Incandescent</p>	 <p>EcoVantage Natural Light 43W</p>	<ul style="list-style-type: none"> • Provides light similar to natural daylight • Saves 28% in energy costs when replacing a 60W incandescent[◇] • Complies with EISA 2007 (Energy Independence and Security Act of 2007) efficiency standards for 2012–2014 	100

A19 rated at 570 lumens provides 47% energy savings.

◇ 60W - 43W = 17W / 60W = 28%. When compared to a 60-Watt standard incandescent A19 rated at 680 lumens, the 43-Watt EcoVantage

A19 rated at 630 lumens provides 28% energy savings.

Halogen Lamps

EcoVantage Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Ordering Code	Volts	Pkg. Qty.‡	Description	Class Filament	MOL (In.)	Rated Avg. Life (Hrs.)(93)	Approx. MBCP ¹	Lumens	Life Years (446)	Energy Cost (445)	Color Temp. (K)
EcoVantage A-Shape (97, 103)																
29	A19	Med.	40983-9	■	29A19/EV	120	24	White	C, CC-8	4 ¹ / ₁₆	1000	—	380	0.9	\$3.49	2810
			41050-6	■	29A19/EV/CL	120	24	Clear	C, CC-8	4 ¹ / ₁₆	1000	—	380	0.9	\$3.49	2790
			45735-8	† ■	29A19/EV/LL	120	24	White, Twice the Life	C, CC-8	4 ¹ / ₁₆	2000	—	300	1.8	\$3.49	2610
43	A19	Med.	40984-7	■	43A19/EV	120	24	White	C, CC-8	4 ¹ / ₁₆	1000	—	750	0.9	\$5.18	2920
			41049-8	■	43A19/EV/CL	120	24	Clear	C, CC-8	4 ¹ / ₁₆	1000	—	750	0.9	\$5.18	2920
			22695-1	■	43A19/EV/NTL	120	24	Natural Light	C, CC-8	4 ¹ / ₁₆	1100	—	600	1.0	\$5.18	2930
			45734-1	† ■	43A19/EV/LL	120	24	White, Twice the Life	C, CC-8	4 ¹ / ₁₆	2000	—	580	1.8	\$5.18	2720
53	A19	Med.	45523-8	† ■	53A19/EV	120	24	White	C, CC-8	4 ¹ / ₁₆	1000	—	1050	0.9	\$6.38	3010
			45524-6	† ■	53A19/CL	120	24	Clear	C, CC-8	4 ¹ / ₁₆	1000	—	1050	0.9	\$6.38	3010
			22696-9	■	53A19/EV/NTL	120	24	Natural Light	C, CC-8	4 ¹ / ₁₆	1100	—	790	1.0	\$6.38	2960
			45800-0	† ■	53A19/EV/LL	120	24	White, Twice the Life	C, CC-8	4 ¹ / ₁₆	2000	—	790	1.8	\$6.38	2750
72	A19	Med.	40982-1	■	72A19/EV	120	24	White	C, CC-8	4 ¹ / ₁₆	1000	—	1490	0.9	\$8.67	3000
			42924-1	■	72A19/EV/CL	120	24	Clear	C, CC-8	4 ¹ / ₁₆	1000	—	1490	0.9	\$8.67	2990
			22699-3	■	72A19/EV/NTL	120	24	Natural Light	C, CC-8	4 ¹ / ₁₆	1100	—	1170	1.0	\$8.67	3070
			45733-3	† ■	72A19/EV/LL	120	24	White, Twice the Life	C, CC-8	4 ¹ / ₁₆	2000	—	1120	1.8	\$8.67	2780

FTC REQUIREMENTS*

EcoVantage Decorative Blister-Carded

25	B11	Cand.	41919-2	(97)* ■	BC25B11/E12/EV/CL	120	12	Clear, Blister Card	C, CC-8	3 ³ / ₁₆	2500	—	280	2.3	\$3.01	2900
		Med.	42427-5	(97)* ■	BC25B11/E26/EV/CL	120	12	Clear, Blister Card	C, CC-8	3 ³ / ₁₆	2500	—	280	2.3	\$3.01	2900
	BA11	Cand.	41917-6	(97)* ■	BC25BA11/E12/EV/CL	120	12	Clear, Blister Card	C, CC-8	3 ³ / ₁₆	2500	—	280	2.3	\$3.01	2900
		Med.	42425-9	(97)* ■	BC25BA11/E26/EV/CL	120	12	Clear, Blister Card	C, CC-8	3 ³ / ₁₆	2500	—	280	2.3	\$3.01	2900
	G16 ¹ / ₂	Cand.	42086-9	(97)* ■	BC25G16 ¹ / ₂ /EV/CL	120	12	Clear, Blister Card	C, CC-8	2 ³ / ₁₆	2500	—	270	2.3	\$3.01	2700
			42087-7	(97)* ■	BC25G16 ¹ / ₂ /EV/W	120	12	White, Blister Card	C, CC-8	2 ³ / ₁₆	2500	—	245	2.3	\$3.01	2700
40	B11	Cand.	41920-0	(97)* ■	BC40B11/E12/EV/CL	120	12	Clear, Blister Card	C, CC-8	3 ³ / ₁₆	2500	—	540	2.3	\$4.82	2900
		Med.	42428-3	(97)* ■	BC40B11/E26/EV/CL	120	12	Clear, Blister Card	C, CC-8	3 ³ / ₁₆	2500	—	540	2.3	\$4.82	2900
	BA11	Cand.	41918-4	(97)* ■	BC40BA11/E12/EV/CL	120	12	Clear, Blister Card	C, CC-8	3 ³ / ₁₆	2500	—	540	2.3	\$4.82	2900
		Med.	42426-7	(97)* ■	BC40BA11/E26/EV/CL	120	12	Clear, Blister Card	C, CC-8	3 ³ / ₁₆	2500	—	540	2.3	\$4.82	2900
43	F15	Med.	43372-2	■ † (88,103)	BC43F15/EV/CL	120	4	Clear, Blister Card	C, CC-8	4 ¹ / ₁₆	1000	—	750	0.9	\$5.18	2920
72	F15	Med.	42385-5	■ (88,103)	BC72F15/EV/CL	120	4	Clear, Blister Card	C, CC-8	4 ¹ / ₁₆	1000	—	1490	0.9	\$8.67	3000

For the most current product information, go to the e-catalog on www.philips.com
Halogen symbols and footnotes located on page 108



Halogen Lamps

EcoVantage Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Ordering Code	Volts	Pkg. Qty.‡	Description	Class Filament	MOL (In.)	Rated Avg. Life (Hrs.)(93)	Approx. MBCP ¹	Lumens	Life Years (446)	Energy Cost (445)	Color Temp. (K)
-------	------	------	----------------	--------------------	---------------	-------	------------	-------------	----------------	-----------	----------------------------	---------------------------	--------	------------------	-------------------	-----------------

EcoVantage Decorative Boxed (97)

FTC REQUIREMENTS*

40	G25	Med.	42084-4	■	40G25/EV/CL	120	12	Clear	C, CC-8	4 1/8	2500	—	550	2.3	\$4.82	2800
			42085-1	■	40G25/EV/W	120	12	White	C, CC-8	4 1/8	2500	—	500	2.3	\$4.82	2800

EcoVantage Halogen Pro PAR20 Lamps (82, 86)

39	PAR20	Med.	42512-4	■	39PAR20/EVP/SP10	120	15	Spot 10°	C, CC-8	3 3/8	1100	3840	480	1.0	\$4.70	2900
			42520-7	■	39PAR20/EVP/FL25	120	15	Flood 25°	C, CC-8	3 3/8	1100	865	480	1.0	\$4.70	2900

EcoVantage Halogen Pro PAR30S Lamps (82, 86)

39	PAR30S	Med.	42891-2	■	39PAR30S/EVP/SP10	120	15	Spot 10°	C, CC-8	3 3/8	1100	6300	500	1.0	\$4.70	2900
			42896-0	■	39PAR30S/EVP/FL25	120	15	Flood 25°	C, CC-8	3 3/8	1100	1870	500	1.0	\$4.70	2900
53	PAR30S	Med.	42890-4	■Ⓢ(104)	53PAR30S/EVP/FL25	120	15	Flood 25°	C, CC-8	3 3/8	1100	3100	920	1.0	\$6.38	2860
			42898-6	■Ⓢ(104)	53PAR30S/EVP/WFL40	120	15	Wide Flood 40°	C, CC-8	3 3/8	1100	1400	920	1.0	\$6.38	2860

EcoVantage Halogen Pro PAR30L Lamps (82, 86)

39	PAR30L	Med.	42887-0	■Ⓢ(104)	39PAR30L/EVP/FL25	120	15	Flood 25°	C, CC-8	4 1/8	1100	1870	500	1.0	\$4.70	2900
53	PAR30L	Med.	42892-0	■Ⓢ(104)	53PAR30L/EVP/FL25	120	15	Flood 25°	C, CC-8	4 1/8	1100	3100	920	1.0	\$6.38	2860
			42895-2	■Ⓢ(104)	53PAR30L/EVP/WFL40	120	15	Wide Flood 40°	C, CC-8	4 1/8	1100	1400	920	1.0	\$6.38	2860

EcoVantage Halogen Pro PAR38 Lamps (82, 86)

39	PAR38	Med.Skt.	42886-2	■	39PAR38/EVP/SP10	120	12	Spot 10°	C, CC-8	5 3/8	1100	7000	540	1.0	\$4.70	2900
			42884-7	■	39PAR38/EVP/FL25	120	12	Flood 25°	C, CC-8	5 3/8	1100	1900	540	1.0	\$4.70	2900
53	PAR38	Med.Skt.	42885-4	■Ⓢ(104)	53PAR38/EVP/FL25	120	12	Flood 25°	C, CC-8	5 3/8	1100	3250	920	1.0	\$6.38	2860
72	PAR38	Med.Skt.	42894-6	■Ⓢ(104)	72PAR38/EVP/SP10	120	12	Spot 10°	C, CC-8	5 3/8	1100	16,000	1350	1.0	\$8.67	2880
			42893-8	■Ⓢ(104)	72PAR38/EVP/FL25	120	12	Flood 25°	C, CC-8	5 3/8	1100	4500	1350	1.0	\$8.67	2880

For the most current product information, go to the e-catalog on www.philips.com
Halogen symbols and footnotes located on page 108



Halogen Lamps

Halogen Energy Advantage, Halogen PAR and PAR36 Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Ordering Code	Volts	Pkg. Qty.‡	Description	Class Filament	MOL (In.)	Rated Avg. Life (Hrs.)(93)	Approx. MBCP [§]	Lumens	Life Years (446)	Energy Cost (445)	Color Temp. (K)
-------	------	------	----------------	--------------------	---------------	-------	------------	-------------	----------------	-----------	----------------------------	---------------------------	--------	------------------	-------------------	-----------------

Halogen PAR16 Lamps (86)

FTC REQUIREMENTS*

45	PAR16 Med.		26345-9		45PAR16/HAL/FL27	120	15	Flood 27°	C, CC-8	3½	2500	1275	420	2.3	\$5.42	2900
60	PAR16 Med.		33006-8		60PAR16/HAL/FL27	120	15	Flood 27°	C, CC-8	3½	2500	1900	580	2.3	\$7.23	2950

Energy Advantage IR Plus (IRC+) Halogen PAR20 Lamps (86, 104)

20	PAR20 Med.		45377-9	■ †	39PAR20/IRC+/SP10	120	15	Spot 10°	C, C-8	3¾	4400	6600	500	4.0	\$4.70	2600
			45378-7	■ †	39PAR20/IRC+/FL30	120	15	Flood 30°	C, C-8	3¾	4400	1200	500	4.0	\$4.70	2600

Energy Advantage IR Plus (IRC+) Halogen PAR30 Long Neck Lamps (86, 104)

50	PAR30L Med.		23799-0	■ ©	50PAR30L/IRC+/SP10	120	15	Spot 10°	C, CC-8	4¾	4400	12,000	900	4.0	\$6.02	2750
			23429-4	■ ©	50PAR30L/IRC+/FL25	120	15	Flood 25°	C, CC-8	4¾	4400	3500	900	4.0	\$6.02	2750
			23800-6	■ ©	50PAR30L/IRC+/WFL40	120	15	Wide Flood 40°	C, CC-8	4¾	4400	1600	900	4.0	\$6.02	2750

Energy Advantage IR Plus (IRC+) Halogen PAR30 Short Neck Lamps (86)

39	PAR30S Med.		23853-5	■	39PAR30S/IRC+/SP10	120	15	Spot 10°	C, CC-8	3¾	4400	11,000	650	4.0	\$4.70	2800
			23854-3	■	39PAR30S/IRC+/FL25	120	15	Flood 25°	C, CC-8	3¾	4400	2200	650	4.0	\$4.70	2800
50	PAR30S Med.		14499-7	■ ©(104)	50PAR30S/IRC+/SP10	120	15	Spot 10°	C, CC-8	3¾	4400	12,000	950	4.0	\$6.02	2800
			14500-3	■ ©(104)	50PAR30S/IRC+/FL25	120	15	Flood 25°	C, CC-8	3¾	4400	3850	950	4.0	\$6.02	2800
			14501-1	■ ©(104)	50PAR30S/IRC+/WFL40	120	15	Wide Flood 40°	C, CC-8	3¾	4400	1420	950	4.0	\$6.02	2800
55	PAR30S Med.		23855-0	■ ©(104)	55PAR30S/IRC+/SP10	120	15	Spot 10°	C, CC-8	3¾	4400	13,000	1050	4.0	\$6.62	2760
			23856-8	■ ©(104)	55PAR30S/IRC+/FL25	120	15	Flood 25°	C, CC-8	3¾	4400	3300	1050	4.0	\$6.62	2760
			23857-6	■ ©(104)	55PAR30S/IRC+/WFL40	120	15	Wide Flood 40°	C, CC-8	3¾	4400	1500	1050	4.0	\$6.62	2760

Halogen PAR36 Lamps (86)

11	PAR36 MP		15683-6		11PAR36Q/FL30	12	6	PAR, Flood	C, C-6	2¾	2000	—	60	1.8	\$1.32	3000
			41718-8		11PAR36Q/FL30	12	12	PAR, Flood	C, C-6	2¾	2000	—	60	1.8	\$1.32	3000
25	PAR36 MP		42204-8		25PAR36Q/FL30	12	12	PAR, Flood	C, C-6	2¾	2000	—	270	1.8	\$3.01	3000
36	PAR36 MP		41525-7		36PAR36Q/FL30	12	6	PAR, Flood	C, C-6	2¾	4000	—	450	3.7	\$4.34	3000
50	PAR36 MP		22859-3		50PAR36/NSP	12	12	PAR, Narrow Spot	C, C-6	2¾	2000	—	650	1.8	\$6.02	3000
			41524-0		50PAR36Q/FL30	12	6	PAR, Flood	C, C-6	2¾	4000	—	650	3.7	\$6.02	3000
			29603-8		50PAR36/WFL	12	12	PAR, Wide Flood	C, C-6	2¾	2000	—	650	1.8	\$6.02	3000

For the most current product information, go to the e-catalog on www.philips.com
Halogen symbols and footnotes located on page 108



Halogen Lamps

Energy Advantage Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Ordering Code	Volts	Pkg. Qty.‡	Description	Class Filament	MOL (In.)	Rated Avg. Life (Hrs.)(93)	Approx. MBCP ¹	Lumens	Life Years (446)	Energy Cost (445)	Color Temp. (K)
Energy Advantage IR Plus (IRC+) Halogen PAR38 (86)													FTC REQUIREMENTS*			
39	PAR38	Med.Skt.	23845-1	■	39PAR38/IRC+/FL25	120	12	Flood 25°	C, CC-8	5/16	4400	2500	680	4.0	\$4.70	2800
	DiOptic Reflector															
50	PAR38	Med.Skt.	14505-2	■Ⓢ(104)	50PAR38/IRC+/SP10	120	12	Spot 10°	C, CC-8	5/16	4400	15,500	950	4.0	\$6.02	2760
			14506-0	■Ⓢ(104)	50PAR38/IRC+/FL25	120	12	Flood 25°	C, CC-8	5/16	4400	4000	950	4.0	\$6.02	2760
55	PAR38	Med.Skt.	23865-9	■Ⓢ(104)	55PAR38/IRC+/FL25	120	12	Flood 25°	C, CC-8	5/16	4400	4100	1050	4.0	\$6.62	2700
			23849-3	■Ⓢ(104)	55PAR38/IRC+/WFL40	120	12	Wide Flood 40°	C, CC-8	5/16	4400	1800	1050	4.0	\$6.62	2700
70	PAR38	Med.Skt.	13861-0	■Ⓢ(104)	70PAR38/IRC+/SP10	120	12	Spot 10°	C, CC-8	5/16	4400	17,800	1500	4.0	\$8.43	2800
			13862-8	■Ⓢ(104)	70PAR38/IRC+/FL25	120	12	Flood 25°	C, CC-8	5/16	4400	6170	1500	4.0	\$8.43	2800
			13863-6	■Ⓢ(104)	70PAR38/IRC+/WFL40	120	12	Wide Flood 40°	C, CC-8	5/16	4400	2320	1500	4.0	\$8.43	2800
83	PAR38	Med.Skt.	23851-9	■Ⓢ(104)	83PAR38/IRC+/FL25	120	12	Flood 25°	C, CC-8	5/16	4400	7000	1750	4.0	\$10.00	2730
100	PAR38	Med.Skt.	13876-8	■Ⓢ(104)	100PAR38/IRC+/SP10	120	12	Spot 10°	C, CC-8	5/16	4400	26,400	2150	4.0	\$12.05	2830
			13877-6	■Ⓢ(104)	100PAR38/IRC+/FL25	120	12	Flood 25°	C, CC-8	5/16	4400	8500	2150	4.0	\$12.05	2830
			13878-4	■Ⓢ(104)	100PAR38/IRC+/WFL40	120	12	Wide Flood 40°	C, CC-8	5/16	4400	3500	2150	4.0	\$12.05	2830

For the most current product information, go to the e-catalog on www.philips.com
Halogen symbols and footnotes located on page 108



Energy Advantage IR PAR38
Med. Skt.
DiOptic Reflector

Halogen Lamps

Mini Reflector Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Ordering Code	Volts	Pkg. Qty.‡	Description	Class Filament	MOL (In.)	Rated Avg. Life (Hrs.)(93)	Approx. MBCP [§]	Lumens	Life Years (446)	Energy Cost (445)	Color Temp. (K)
-------	------	------	----------------	--------------------	---------------	-------	------------	-------------	----------------	-----------	----------------------------	---------------------------	--------	------------------	-------------------	-----------------

Halogen MRC11 Blister-Carded (92)

FTC REQUIREMENTS*

20	MRC11	GU4	41930-9		BC20MRC11/FL30 FTD	12	12	Blister Card, Flood 30°	C, CC-8	1%	2000	500	215	1.8	\$2.41	2800
----	-------	-----	---------	--	--------------------	----	----	-------------------------	---------	----	------	-----	-----	-----	--------	------

Halogen MRC11 (Formerly BrilliantLine Pro) (92)

20	MRC11	GU4	37822-4		20MRC11/FL30 PRO FTD	12	50	Flood 30°	C, CC-8	1%	4000	690	320	3.7	\$2.41	3100
----	-------	-----	---------	--	----------------------	----	----	-----------	---------	----	------	-----	-----	-----	--------	------

Halogen MRC11 Landscape (92)

10	MRC11	GU4	41722-0		10MRC11/FL30/LAND/TP	12	6	Flood 30°	C, CC-8	1%	2000	230	90	1.8	\$1.20	2750
20	MRC11	GU4	15676-0		20MRC11/FL30/LAND/TP	12	6	Flood 30°	C, CC-8	1%	2000	500	215	1.8	\$2.41	2800

Halogen MRC16 Display Lamps Blister-Carded (Formerly AccentLine) Dichroic Reflector With Lens (92)

20	MRC16	GU5.3	41931-7		BC20MRC16/FL36 BAB	12	12	Blister Card, Flood 36°	C, C-8	1%	3000	500	240	2.7	\$2.41	3000
			41568-7		BC20MRC16/FL36	12	18	Blister Card, Flood 36°	C, C-8	1%	3000	500	240	2.7	\$2.41	3000
35	MRC16	GU5.3	41932-5		BC35MRC16/FL36 FMW	12	12	Blister Card, Flood 36°	C, C-8	1%	3000	1000	540	2.7	\$4.22	3000
50	MRC16	GU5.3	41563-8		BC50MRC16/SPI0 EXT	12	12	Blister Card, Spot 10°	C, C-8	1%	3000	6200	700	2.7	\$6.02	3000
			41580-2		BC50MRC16/SPI0	12	18	Blister Card, Spot 10°	C, C-8	1%	3000	—	600	2.7	\$6.02	2800
			41933-3		BC50MRC16/FL36 EXN	12	12	Blister Card, Flood 36°	C, C-8	1%	3000	1600	850	2.7	\$6.02	3000
			41580-2		BC50MRC16/FL	12	18	Blister Card, Flood 36°	C, C-8	1%	2000	1200	400	1.8	\$6.02	2800

Halogen MRC16 Landscape Lamps Blister-Carded (Formerly AccentLine) Dichroic Reflector With Lens (92)

20	MRC16	GU5.3	15677-8		BC20MRC16/FL36/LAND	12	6	Blister Card, Flood 36°	C, C-8	1%	3000	500	240	2.7	\$2.41	3000
35	MRC16	GU5.3	15678-6		BC35MRC16/FL36/LAND	12	6	Blister Card, Flood 36°	C, C-8	1%	3000	1000	540	2.7	\$4.22	3000
50	MRC16	GU5.3	15679-4		BC50MRC16/FL36/LAND	12	6	Blister Card, Flood 36°	C, C-8	1%	3000	1500	770	2.7	\$6.02	3000

Halogen MR (Formerly AccentLine) (91)

20	MR16	GU5.3	37802-6		20MR16/SPI0 ESX	12	50	Spot 10°	C, C-8	1%	3000	2200	230	2.7	\$2.41	3100
			37803-4		20MR16/FL36 BAB	12	50	Flood 36°	C, C-8	1%	3000	500	240	2.7	\$2.41	3100
35	MR16	GU5.3	14056-6		35MR16/FL36	12	50	Flood 36°	C, C-8	1%	3000	1000	540	2.7	\$4.22	3000
50	MR16	GU5.3	37804-2		50MR16/SPI0 EXT	12	50	Spot 10°	C, C-8	1%	3000	6200	700	2.7	\$6.02	3100
			37807-5		50MR16/NFL24 EXZ	12	50	Narrow Flood 24°	C, C-8	1%	3000	2100	740	2.7	\$6.02	3100
			37805-9		50MR16/FL36 EXN	12	50	Flood 36°	C, C-8	1%	3000	1600	850	2.7	\$6.02	3100

Halogen MR Long Life (Formerly BrilliantLine Pro and Continuum Color)

20	MRC16	GU5.3	37815-8 (92)		20MRC16/FL36 BAB	12	50	Flood 36°	C, C-8	1%	6000	780	320	5.5	\$2.41	3100
35	MRC16	GU5.3	14052-5 (92)		35MRC16/NFL24	12	50	Narrow Flood 24°	C, C-8	1%	6000	3100	690	5.5	\$4.22	3100
			14053-3 (92)		35MRC16/FL36	12	50	Flood 36°	C, C-8	1%	6000	1500	710	5.5	\$4.22	3100
50	MRC16	GU5.3	37817-4 (92)		50MRC16/NFL24 EXZ	12	50	Narrow Flood 24°	C, C-8	1%	6000	4400	960	5.5	\$6.02	3100
			37818-2 (92)		50MRC16/FL36 EXN	12	50	Flood 36°	C, C-8	1%	6000	2200	775	5.5	\$6.02	3100
75	MR16	GU5.3	37808-3 (91)		75MR16/SPI0 EYF	12	50	Spot 10°	C, C-8	1%	6000	14,000	1320	5.5	\$9.03	3100
			37809-1 (91)		75MR16/FL36 EYC	12	50	Flood 36°	C, C-8	1%	6000	2500	1410	5.5	\$9.03	3100

For the most current product information, go to the e-catalog on www.philips.com
Halogen symbols and footnotes located on page 108



Halogen Lamps

Mini Reflector, ALR, ALUline PRO III, Twistline and Linear Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Ordering Code	Volts	Pkg. Qty.‡	Description	Class Filament	MOL (In.)	Rated Avg. Life (Hrs.)(93)	Approx. MBCP ¹	Lumens	Life Years (446)	Energy Cost (445)	Color Temp. (K)	
Halogen MR Energy Advantage IR (Formerly MasterLine ES IRC) (92)													FTC REQUIREMENTS*				
20	MRC16	GU5.3	20259-8	■	20MRC16/IRC/ALU/FL36	12	20	Flood 36°	C, C-8	1½	5000	925	325	4.6	\$2.41	3100	
30	MRC16	GU5.3	20261-4	■	30MRC16/IRC/ALU/NFL24	12	20	Narrow Flood 24°	C, C-8	1½	5000	3000	570	4.6	\$3.61	3100	
			20262-2	■	30MRC16/IRC/ALU/FL36	12	20	Flood 36°	C, C-8	1½	5000	1500	580	4.6	\$3.61	3100	
35	MRC16	GU5.3	20263-0	■	35MRC16/IRC/ALU/SP8	12	20	Spot 8°	C, C-8	1½	5000	12,500	720	4.6	\$4.22	3100	
			20267-1	■	35MRC16/IRC/ALU/NFL24	12	20	Narrow Flood 24°	C, C-8	1½	5000	4000	730	4.6	\$4.22	3100	
			20268-9	■	35MRC16/IRC/ALU/FL36	12	20	Flood 36°	C, C-8	1½	5000	2000	740	4.6	\$4.22	3000	
45	MRC16	GU5.3	20272-1	■	45MRC16/IRC/NFL24	12	20	Narrow Flood 24°	C, C-8	1½	5000	5400	1040	4.6	\$5.42	3100	
			20273-9	■	45MRC16/IRC/FL36	12	20	Flood 36°	C, C-8	1½	5000	2600	1050	4.6	\$5.42	3100	
Closed Aluminum Reflector (ALR) Lamps Aluminum Reflector With Lens (92)																	
20	37mm	BA15d	32840-1		20ALR12/NSP6 GBD Clear	12	50	Clear, Narrow Spot 6°	C, C-8	1½	2000	7000	250	1.8	\$2.41	3000	
			34002-6		20ALR12/SP18 GBE Frost	12	50	Frost, Spot 18°	C, C-8	1½	2000	1500	250	1.8	\$2.41	3000	
			34003-4		20ALR12/FL32 GBF Frost	12	50	Frost, Flood 32°	C, C-8	1½	2000	750	250	1.8	\$2.41	3000	
50	56mm	B15d	34091-9		50ALR18/NFL25 GBK Frost	12	50	Frost, Narrow Flood 25°	C, C-8	2¼	2000	2500	820	1.8	\$6.02	3000	
ALUline PRO III																	
50	ALU	G53	Pro III	13396-6		ALU111MM 50W G53 12V 8D	12	6	Spot 8°	C, C-8	2¾	3000	23,000	950	2.7	\$6.02	3000
				13397-4		ALU111MM 50W G53 12V 24D	12	6	Flood 24°	C, C-8	2¾	3000	4000	950	2.7	\$6.02	3000
Twistline GU10 Blister-Carded (98)																	
25	Twistline	GU10	41693-3		BC25TWISTLINE GU10/FL25	120	6	Blister Card, Flood 25°	C, C-6	2	2000	345	160	1.8	\$3.01	2700	
35	Twistline	GU10	41573-7		BC35TWISTLINE GU10/FL25	120	6	Blister Card, Flood 25°	C, C-6	2	2000	480	265	1.8	\$4.22	2750	
50	Twistline	GU10	41579-4		BC50GU10/HAL/TL	120	6	Blister Card, Flood 25°	C, C-6	2	2000	700	430	1.8	\$6.02	2800	
			41574-5		BC50TWISTLINE GU10/FL25	120	6	Blister Card, Flood 25°	C, C-6	2	2000	700	430	1.8	\$6.02	2800	
Halogen Single-Ended Linear Lamps Blister-Carded (95)																	
50	T4	Mini-Can	41555-4		BC50Q/CL	120	12	Blister Card	C, CC-8	2¾	1000	—	500	0.9	\$6.02	2700	
75	T4	Mini-Can	41556-2		BC75Q/CL	120	12	Blister Card	C, CC-8	3	1000	—	1050	0.9	\$9.03	2700	
100	T4	Mini-Can	41633-9		BC100Q/CL ESN	120	12	Blister Card	C, CC-8	2¾	1000	—	1600	0.9	\$12.05	2700	
150	T4	Mini-Can	41634-7		BC150Q/CL ETG	120	12	Blister Card	C, CC-8	3	1000	—	2800	0.9	\$18.07	2700	

For the most current product information, go to the e-catalog on www.philips.com
Halogen symbols and footnotes located on page 108



Halogen Lamps

Linear and Capsule Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Ordering Code	Volts	Pkg. Qty. ‡	Description	Class Filament	MOL (In.)	Rated Avg. Life (Hrs.) (93)	Approx. MBCP [†]	Lumens	Life Years (446)	Energy Cost (445)	Color Temp. (K)
-------	------	------	----------------	--------------------	---------------	-------	-------------	-------------	----------------	-----------	-----------------------------	---------------------------	--------	------------------	-------------------	-----------------

Halogen Single-Ended Linear Lamps (95)

FTC REQUIREMENTS*

100	T4	D.C. Bay	44278-0		I00Q/CL/DC ESR	120	12	Clear	C, CC-8	2%	1000	—	1600	0.9	\$12.05	2700
150	T4	Mini-Can	20049-3		I50Q/CL	130	12	Clear	C, CC-8	3	1000	—	2800	0.9	\$18.07	2700
250	T4	Mini-Can	14668-8		250Q/CL EHT	120	12	Clear	C, CC-8	3%	1000	—	5000	0.9	\$30.11	2850
			14667-0		250Q/CL	130	12	Clear	C, CC-8	3%	1000	—	5000	0.9	\$30.11	2850

Halogen Double-Ended Linear Lamp Blister-Carded (99)

100	T3	RSC	41560-4		BC100T3Q/CL	120	12	Blister Card	C, C-8	3%	2000	—	1600	1.8	\$12.05	2900
150	T3	RSC	41561-2		BC150T3Q/CL	120	12	Blister Card	C, C-8	3%	2000	—	2400	1.8	\$18.07	2900
			41575-2		BC150T3Q/CL LONG	120	12	Blister Card	C, C-8	4%	1500	—	2400	1.4	\$18.07	2900
300	T3	RSC	20355-4		BC300T3Q/CL	120	12	Blister Card	C, C-8	4%	2000	—	5200	1.8	\$36.14	2900
			41571-1		BC300T3Q/CL/TP	120	12	Blister Card	C, C-8	4%	2000	—	5200	1.8	\$36.14	2900
500	T3	RSC	41572-9		BC500T3Q/CL/TP	120	12	Blister Card	C, C-8	4%	2000	—	9500	1.8	\$60.23	2900

Halogen Double-Ended Linear Lamp (99)

300	T3	RSC	39282-9		300T3Q/CL EHM	120	12	Clear	C, C-8	4%	2000	—	5200	1.8	\$36.14	2900
500	T3	RSC	13223-3		500T3Q/CL	125	12	Clear	C, C-8	4%	2000	—	9200	1.8	\$60.23	2850
						130										
			20010-5		500T3Q/CL FCL	120	12	Clear	C, C-8	4%	2000	—	9500	1.8	\$60.23	2900
1000	T3	RSC	41972-1		I000T3Q/CL	240	12	Clear	C, C-8	7%	2000	—	21,500	1.8	\$120.45	2,950
1500	T3	RSC	41996-9		I500T3Q/CL	277	12	Clear	C, C-8	10	2000	—	33,000	1.8	\$180.68	2,950

Halogen Mains-Voltage Capsule Lamp Blister-Carded (95)

35	T4	GY8.6	41632-1		BC35W/T4/120V/CAPSULE	120	12	Blister Card	C, CC2V	1%	2500	—	400	2.3	\$4.22	3000
50	T4	GY8.6	41631-3		BC50W/T4/120V/CAPSULE	120	12	Blister Card	C, C-8	2%	2500	—	600	2.3	\$6.02	3000
75	T4	GY8.6	41667-7		BC75W/T4/120V/CAPSULE	120	12	Blister Card	C, C-8	2%	2000	—	1200	1.8	\$9.03	3000
100	T4	GY8.6	41668-5		BC100W/T4/120V/CAPSULE	120	12	Blister Card	C, C-8	2%	2500	—	1650	2.3	\$12.05	3000

Halogen Low-Voltage Capsule Lamp Blister-Carded (95)


10	T3	G4	41567-9		BC10W/T3/12V	12	12	Blister Card	C, C-8	1%	2000	—	100	1.8	\$1.20	3000
20	T3	G4	41566-1		BC20W/T3/12V	12	12	Blister Card	C, C-8	1%	2000	—	250	1.8	\$2.41	3000
50	T4	GY6.35	41559-6		BC50W/T4/12V	12	12	Blister Card	C, C-8	1%	2000	—	700	1.8	\$6.02	3000
75	T4	GY6.35	41558-8		BC75W/T4/12V	12	12	Blister Card	C, C-8	1%	2000	—	1100	1.8	\$9.03	2800

Halogen Low-Voltage Capsule Lamp

All Lamps Contain UV Block and are Low Pressure (95)

10	T3	G4	23262-9		I0W/T3/12V	12	100	Capsule Type I3284	C, C-8	1%	2000	—	140	1.8	\$1.20	2850
20	T3	G4	23264-5		I20W/T3/12V	12	100	Capsule Type I3078	C, C-8	1%	2000	—	320	1.8	\$2.41	3000
35	T4	GY6.35	29553-5		I35W/T4/12V	12	100	Capsule Type I3103	C, C-8	1%	2000	—	600	1.8	\$4.22	3000
50	T4	GY6.35	41710-5	†	BC50W/T4/12V	12	48	Blister Card	C, C-8	1%	2000	—	465	1.8	\$6.02	2800

For the most current product information, go to the e-catalog on www.philips.com
Halogen symbols and footnotes located on page 108

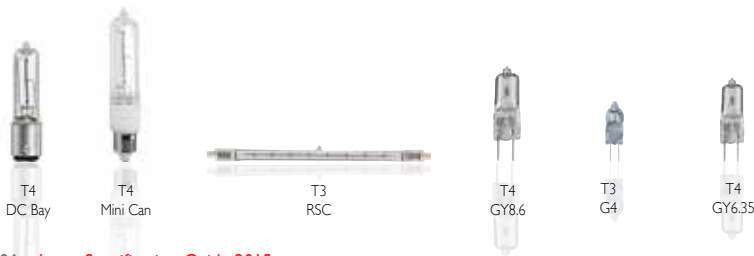


Halogen Lamps


Filament Designations, Base Types and Bulb Shapes

Filament Designations (Not Actual Sizes)

Filament Designations consist of a letter or letters to indicate how the wire is coiled and an arbitrary number sometimes followed by a letter to indicate the arrangement of the filament on the supports. Prefix letters include C (coil) — wire is wound into a helical coil or it may be deeply fluted; CC (coiled coil) — wire is wound into a helical coil and this coiled wire again wound into a helical coil. Some of the more commonly used types of filament arrangements are illustrated.

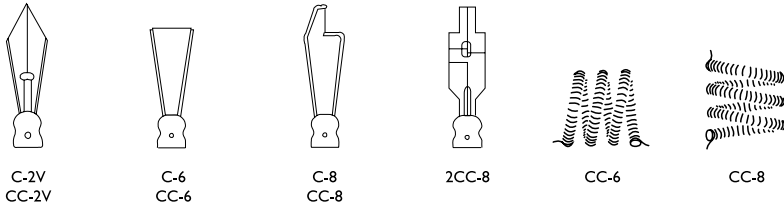


Base Types (Not Actual Sizes)

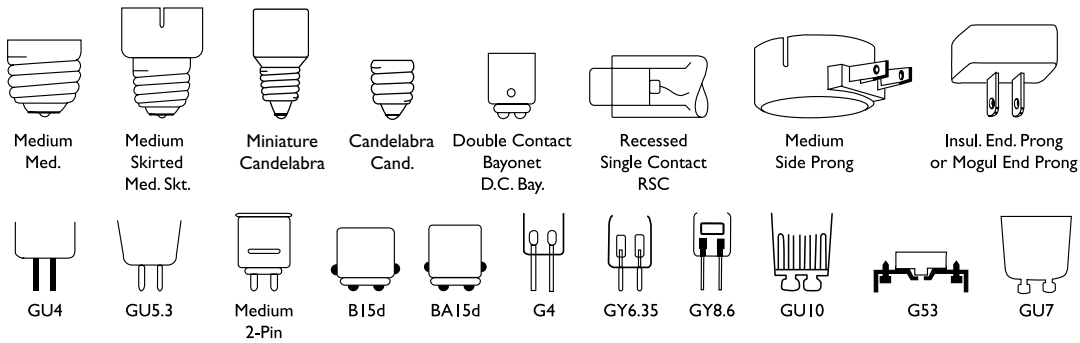

Bulb Shapes (Not Actual Sizes)

The size and shape of a bulb is designated by a letter or letters followed by a number. The letter indicates the shape of the bulb while the number indicates the diameter of the bulb in eighths of an inch. For example, "T10" indicates a tubular shaped bulb having a diameter of $\frac{1}{8}$ or $\frac{1}{4}$ inches. The following illustrations show some of the more popular bulb shapes and sizes.

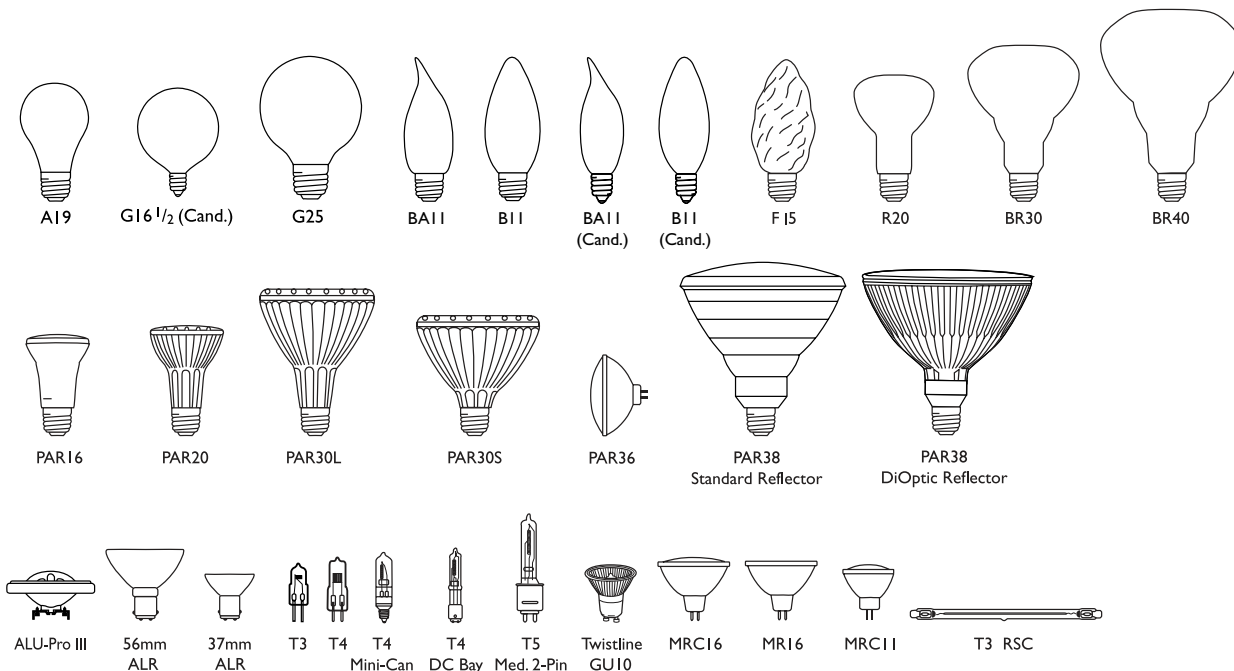

Halogen Lamps

Symbols and Footnotes

For the most current product information, go to the e-catalog on www.philips.com

- Exclusive to Philips Lighting North America Corporation
- ▣ Maximum Beam Candlepower
- © This Bulb Meets US Federal Minimum Efficiency Standards
- † New since last printing
- * Two Lamp Carded Pack
- ‡ Quantity shown is minimum shipping container—refer to Net Price Schedule for number of lamps to qualify as a standard case
- ¥ For more information about FTC requirements please see rule 16 CFR part 305 @ www.ftc.gov/2000/02/16cfr305
- Energy Saving Product

(86) PAR Halogen Caution Notice: Before using bulb, see operating instructions on inside flap. Adherence to the operating instructions will reduce the risk of personal injury or fire. The filament capsule contained inside this glass bulb is pressurized, operates at high temperature and could unexpectedly shatter. Should the outer bulb break, particles of extremely hot glass could be discharged into the fixture and/or the surrounding environment, thereby creating a risk of personal injury or fire. **Operating Instructions:** Before replacing, turn off power and let lamp cool to avoid electrical shock or burn.

- For indoor or outdoor use. A weather-protected fixture is recommended for wet locations.
- Suitable for use in open fixtures.
- Do not exceed the maximum wattage rating of the fixture.
- Do not use if outer glass is scratched or broken since it may break during operation or removal.
- If outer glass breaks the lamp may continue to light, however, immediately discontinue use.
- Due to the heat that radiates from the bulb, do not use in close proximity to combustible materials or objects susceptible to drying or fading.
- Manage in accord with disposal laws.

(88) OPERATING INSTRUCTIONS: Before replacing, turn off power and let lamp cool to avoid electrical shock or burn. Do not allow hot bulb to come in contact with liquid or metal parts of the fixture as glass may shatter. Suitable for use in open indoor fixtures and enclosed outdoor fixtures. Do not exceed the maximum wattage rating of the fixture. Do not use if outer glass is scratched or broken since it may break during operation or removal. If outer glass breaks the lamp may continue to light, however, immediately discontinue use. Due to the heat that radiates from the bulb, do not use in close proximity to combustible materials or objects susceptible to drying or fading. Do not use bulbs in ceiling fans or any application exposed to vibrating conditions. Manage in accord with disposal laws.

CAUTION: Before using bulb, see operating instructions. Adherence to the operating instructions will reduce the risk of personal injury or fire. The filament capsule contained inside this glass bulb is pressurized, operates at high temperature and could unexpectedly shatter. Should the outer bulb break, particles of extremely hot glass could be discharged into the fixture and/or the surrounding environment, thereby creating a risk of personal injury or fire.

(91) CAUTION: Do not touch inner capsule with bare hands. Fingerprints may result in shorter life. Remove fingerprints with alcohol. **THIS LAMP IS PRESSURIZED AND COULD SHATTER** so to avoid injury and to avoid exposure to ultraviolet radiation, use only in fixtures that provide a protective shield of tempered glass. Provide adequate ventilation to ensure that seal temperature does not exceed 350°C and use only in fixtures rated for the wattage stated on this package. To avoid risks of burns or other injury, turn power off and allow lamp to fully cool before attempting to replace. Socket condition may affect lamp life. Inspect and replace socket if deterioration has occurred.

(92) CAUTION: THIS LAMP IS PRESSURIZED AND COULD SHATTER. Should the outer bulb break, particles of extremely hot glass could be discharged into the fixture and/or the surrounding environment, thereby creating a risk of personal injury or fire. Provide adequate ventilation to ensure that seal temperature does not exceed 350°C and use only in fixtures rated for the wattage stated on this package. To avoid risks of burns or other injury, turn power off and allow lamp to fully cool before attempting to replace. Socket condition may affect lamp life. Inspect and replace socket if deterioration has occurred.

(93) Rated average life is the length of operation (in hours) at which point an average of 50% of the lamps will still be operational and 50% will not.

(95) NOTICE: Do not touch bulb with bare hands. Fingerprints may result in shorter life. Remove fingerprints with alcohol.

CAUTION: THIS LAMP IS PRESSURIZED AND COULD SHATTER so to avoid injury and to avoid exposure to ultraviolet radiation, use only in fixtures that provide a protective shield of tempered glass. Provide adequate ventilation to ensure that seal temperature does not exceed 350°C and use only in fixtures rated for the wattage stated on this package. To avoid risks of burns or other injury, turn power off and allow lamp to fully cool before attempting to replace. Socket condition may

affect lamp life. Inspect and replace socket if deterioration has occurred.

(96) Operating Instructions: Do not use lamp in close proximity to combustible materials. If used outdoors, use in an enclosed fixture only. If used indoors, no additional shield is required. Can be operated in all positions.

CAUTION: Read operating instructions before use. If outer glass breaks, turn power off immediately and avoid touching any metal components. To avoid potential burn and electrical shock during lamp replacement, always turn power off and let lamp cool before replacing bulb.

(97) Operating Instructions: Before replacing, turn off power and let lamp cool to avoid electrical shock or burn. For indoor use only. Do not allow hot bulb to come in contact with liquid or metal parts of the fixture as glass may shatter. Suitable for use in open fixtures. Do not exceed the maximum wattage rating of the fixture. Do not use if outer glass is scratched or broken since it may break during operation or removal. If outer glass breaks the lamp may continue to light, however, immediately discontinue use. Due to the heat that radiates from the bulb, do not use in close proximity to combustible materials or objects susceptible to drying or fading. Do not use bulbs in ceiling fans or any application exposed to vibrating conditions. Manage in accord with disposal laws.

CAUTION: Adherence to the operating instructions will reduce the risk of personal injury or fire. The filament capsule contained inside this glass bulb is pressurized, operates at high temperature and could unexpectedly shatter. Should the outer bulb break, particles of extremely hot glass could be discharged into the fixture and/or the surrounding environment, thereby creating a risk of personal injury or fire.

(98) NOTICE: This twistline has a GU10 base and may be used in fixtures that have either GU10 or GZ10 sockets.

Operating Instructions: Do not use in close proximity to combustible materials or objects adversely affected by drying or fading. Can be operated in all positions.

CAUTION: THIS LAMP IS PRESSURIZED AND COULD SHATTER so to avoid injury and to avoid exposure to ultraviolet radiation, this lamp should be used in a fixture that provides a protective shield of tempered glass. If outer glass breaks, immediately discontinue use. Always turn power off and let lamp cool before removal to avoid potential burn or electric shock.

(99) WARNING: BULB OPERATES AT VERY HIGH TEMPERATURES AND MUST BE USED PROPERLY TO AVOID/REDUCE RISK OF FIRE. Do not use bulbs greater than 300 watts in indoor residential fixtures. Use only in fixtures specifying this bulb type and that meet revised UL 153 standard for tungsten-halogen torchiere lamps. Bulb is pressurized and could shatter and should only be used in fixtures that provide a protective shield of tempered glass. To avoid exposure to ultraviolet radiation which could cause skin and eye irritation use only in fixtures that provide a protective shield of tempered glass.

NOTICE: Do not touch bulb with bare hands. Fingerprints may result in reduced performance unless they are removed with alcohol. When operating, bulb is hot. To avoid risks of burns or injury, turn power off and allow bulb to cool before replacing. Socket conditions may affect bulb life. Inspect and replace socket if deterioration has occurred. Provide adequate ventilation to ensure that seal temperature does not exceed 350°C. **TO AVOID/REDUCE RISK OF FIRE, DO NOT USE NEAR COMBUSTIBLE MATERIALS.**

(102) Complies with CEC-140-2008-001, Part 1605.2 State Standards for Federally Regulated Appliances, Table K-3. For more information go to www.energy.ca.gov/siting/title20/.

(103) Complies with the Energy Independence and Security Act of 2007 (Public Law 110-140), Section 321—Efficient Light Bulbs.

(104) Complies with the Energy Independence and Security Act of 2007 (Public Law 110-140), Section 322—Incandescent Reflector Lamp Efficiency Standards.

(445) Estimated energy cost is based on 3 hrs/day, 11¢/kWh. Cost depends on rates and use.

(446) Life in years is based on 3 hrs/day.

Halogen Lamps

General Service Incandescent Lamps affected by EISA Section 321*

Banned by Legislation		Halogen Replacement	
Product Number	Ordering Code	Product Number	Ordering Code
13254-8	100A/W 12/4	40982-1	72A19/EV
13255-5	100A/W/TP 24/4	40982-1	72A19/EV
13423-9	100G25/W/LL 12/1	—	—
13560-8	75A/NTL 12/4	22696-9	53A19/EV/NTL
13561-6	100A/NTL 12/4	22699-3	72A19/EV/NTL
13684-6	100A	40982-1	72A19/EV
13996-3	75A/CL 120/I PRO	42924-1	72A19/EV/CL
13997-1	75A 120/I PRO	40982-1	72A19/EV
13998-9	100A/CL 120/I PRO	42924-1	72A19/EV/CL
13999-7	100A 120/I PRO	40982-1	72A19/EV
14297-5	200/99IF	—	—
14997-0	75A/W 12/4	40982-1	72A19/EV
15000-3	75A-67A/99/EV	40982-1	72A19/EV
15001-1	100A-90A/99EV	40982-1	72A19/EV
15002-9	150A-135A/99/EV	—	—
15008-6	100A/CL/LL 12/2	42924-1	72A19/EV/CL
15009-4	150A/CL/LL 12/I TP	—	—
15129-0	75A/NTL/2X 12/4	22696-9	53A19/EV/NTL
15130-8	100A/NTL/2X 12/4	22699-3	72A19/EV/NTL
16739-5	75A/WL 24/4	40982-1	72A19/EV
16740-3	100A/WL 24/4	40982-1	72A19/EV
16801-3	75A/CL/LL 12/2	42924-1	72A19/EV/CL
16844-3	100F20/POSTLT/CL/LL 6/I	42385-5	BC72F15/EV/CL
16850-0	100G30/W/LL 6/I	—	—
16862-5	100A/WL 12/4	40982-1	72A19/EV
16866-6	150A/WL 12/I	—	—
16879-9	75A/WL 12/4	40982-1	72A19/EV
21386-8	BC70BT15/HAL/W	40982-1	72A19/EV
21443-7	38A/W/TP 12/4	40984-7	43A19/EV
21444-5	38A/CL	41050-6	29A19/EV/CL
21446-0	38A/CL/LL 12-2 WP TP	41050-6	29A19/EV/CL
21447-8	38A/WL/TP 12/4	40983-9	29A19/EV
21452-8	57A/CL/LL/TP 12/2	41049-8	43A19/EV/CL
21453-6	71A/W/TP 24/4	40982-1	72A19/EV
21454-4	71A	40982-1	72A19/EV
21455-1	71A/CL/LL 120V 12/2 WP TP	42924-1	72A19/EV/CL
21459-3	95A	40982-1	72A19/EV
21460-1	95A/W 24/4	40982-1	72A19/EV
21461-9	95A/WL 24/4	40982-1	72A19/EV
21463-5	57A/CL	40984-7	43A19/EV
21466-8	57A	40984-7	43A19/EV
21469-2	71A	40982-1	72A19/EV
21470-0	71A/CL	42924-1	72A19/EV/CL
21473-4	95A/CL	42924-1	72A19/EV/CL
21474-2	95A	40982-1	72A19/EV
21497-3	57A 12/4	40984-7	43A19/EV
21498-1	57A/W/TP 12/4	40984-7	43A19/EV
21499-9	57A/WL 12/4 TP	40984-7	43A19/EV
21501-2	71A/W/TP 12/4	40982-1	72A19/EV

* EISA Section 321 refers to energy efficiency standards for general service incandescent lamps.

Halogen and Incandescent Replacement Guide

General Service Incandescent Lamps affected by EISA Section 321*

Banned by Legislation		Halogen Replacement	
Product Number	Ordering Code	Product Number	Ordering Code
21502-0	71A/WL 24/4	40982-1	72A19/EV
21503-8	71A/WL /TP 12/4	40982-1	72A19/EV
21504-6	95A/W/TP 12/4	40982-1	72A19/EV
21818-0	95A/WL 12/4	40982-1	72A19/EV
22240-6	75A-67A/EW	40982-1	72A19/EV
22241-4	75A-67A/EW	40982-1	72A19/EV
22243-0	100A-90A/EW	40982-1	72A19/EV
22244-8	100A-90A/EW	40982-1	72A19/EV
22430-3	100A23	—	—
22979-9	100A/99	40982-1	72A19/EV
23415-3	75A 120V 24-2LP/SL W/P	40982-1	72A19/EV
24135-6	75A/WL	40982-1	72A19/EV
24927-6	BC75BT15/HAL/W	40982-1	72A19/EV
24931-8	BC100BT15/HAL/W	40982-1	72A19/EV
26836-7	I35A25/35	—	—
27069-4	I50A	—	—
27083-5	75A 12/4	40982-1	72A19/EV
28171-7	I00A21	—	—
28172-5	I50A23	—	—
28173-3	I50	—	—
28174-1	I50PS25/99	—	—
28175-8	I50A-I35A/EW	—	—
31305-6	75A21	—	—
37406-6	75A/99	40982-1	72A19/EV
37411-6	I00A21/35	—	—
37417-3	I50A/99	—	—
37460-3	I00A21/99	—	—
37472-8	75A	40982-1	72A19/EV
37473-6	75A	40982-1	72A19/EV
37474-4	I00A	40982-1	72A19/EV
37476-9	I00A	40982-1	72A19/EV
37485-0	75A/W 12/4	40982-1	72A19/EV
37486-8	75A/W/TP 24/4	40982-1	72A19/EV
37525-3	75A/CL	42924-1	72A19/EV/CL
37527-9	I00A/CL	42924-1	72A19/EV/CL
40948-2	57A/W/TP	40984-7	43A19/EV

* EISA Section 321 refers to energy efficiency standards for general service incandescent lamps.

Halogen and Incandescent Replacement Guide

Incandescent Reflector Lamps Affected by EISA Section 322 & DOE Rulemaking*

Banned by Legislation		Halogen Replacement	
Product #	Ordering Code	Product #	Ordering Code
I3401-5	45PAR38/HAL/FL/LL	23845-1	39PAR38/IRC+/FL25
I3402-3	90PAR38/HAL/FL/LL	13862-8	70PAR38/IRC+/FL25
I3403-1	90PAR38/HAL/FL/LL	13862-8	70PAR38/IRC+/FL25
I3404-9	45PAR38/HAL/SP/LL	23844-4	39PAR38/IRC+/SP10
I3405-6	90PAR38/HAL/SP/LL	13861-0	70PAR38/IRC+/SP10
I3407-2	50PAR30L/HAL/FL/LL	23429-4	50PAR30L/IRC+/FL25
I3408-0	75PAR30L/HAL/FL/LL	23429-4	50PAR30L/IRC+/FL25
I3409-8	75PAR30L/HAL/SP/LL	23799-0	50PAR30L/IRC+/SP10
I3410-6	50PAR20/HAL/FL/LL	45378-7	39PAR20/IRC+/FL30
I3411-4	50PAR20/HAL/SP/LL	45378-7	39PAR20/IRC+/FL30
I3467-6	75PAR30S/HAL/FL25	23856-8	55PAR30S/IRC+/FL25
I3846-1	50PAR20/HAL/SP10	40494-7	20PAR20E/HAL/SP10
I3848-7	75PAR30L/HAL/SP10	23799-0	50PAR30L/IRC+/SP10
I3849-5	75PAR30S/HAL/SP10	23855-0	55PAR30S/IRC+/SP10
I3853-7	50PAR30S/IRC/HAL/SP10	23853-5	39PAR30S/IRC+/SP10
I3854-5	50PAR30S/IRC/HAL/FL25	23854-3	39PAR30S/IRC+/FL25
I3855-2	50PAR30S/IRC/HAL/WFL40	23854-3	39PAR30S/IRC+/FL25
I3856-0	45PAR38/IRC/HAL/FL25	23845-1	39PAR38/IRC+/FL25
I3857-8	45PAR38/IRC/HAL/WFL40	23849-3	55PAR38/IRC+/WFL40
I3858-6	55PAR38/IRC/HAL/SP10	14505-2	50PAR38/IRC+/SP10
I3859-4	55PAR38/IRC/HAL/FL25	14506-0	50PAR38/IRC+/FL25
I3860-2	55PAR38/IRC/HAL/WFL40	14507-8	50PAR38/IRC/WFL40
I3864-4	90PAR38/IRC/HAL/SP10	13861-0	70PAR38/IRC+/SP10
I3865-1	90PAR38/IRC/HAL/FL25	13862-8	70PAR38/IRC+/FL25
I3866-9	90PAR38/IRC/HAL/WFL40	13863-6	70PAR38/IRC+/WFL40
I3873-5	60PAR38/IRC/HAL/SP10	23847-7	55PAR38/IRC+/SP10
I3874-3	60PAR38/IRC/HAL/FL25	23865-9	55PAR38/IRC+/FL25
I3875-0	60PAR38/IRC/HAL/WFL40	23849-3	55PAR38/IRC+/WFL40
I3879-2	60PAR38/IRC/HAL/FL25	23865-9	55PAR38/IRC+/FL25
I3918-8	60PAR38/IRC/HAL/WFL40	23849-3	55PAR38/IRC+/WFL40
I3919-6	45PAR38/IRC/HAL/SP10	14505-2	50PAR38/IRC+/SP10
I3920-4	60PAR38/IRC/HAL/SP10	23845-1	39PAR38/IRC+/FL25
I4022-8	60PAR38/HAL/FL/LL	—	—
I4482-4	60PAR38/HAL/SP10	23845-1	39PAR38/IRC+/FL25
I4483-2	60PAR38/HAL/FL25	—	—
I4484-0	60PAR38/HAL/WFL40	23849-3	55PAR38/IRC+/WFL40
I4485-7	75PAR38/HAL/SP10	14505-2	50PAR38/IRC+/SP10
I4486-5	75PAR38/HAL/FL25	23865-9	55PAR38/IRC+/FL25
I4487-3	90PAR38/HAL/WFL40	13863-6	70PAR38/IRC+/WFL40
I4488-1	60PAR38/HAL/SP10	—	—
I4489-9	60PAR38/HAL/FL25	23845-1	39PAR38/IRC+/FL25
I4490-7	60PAR38/HAL/FL25	23845-1	39PAR38/IRC+/FL25
I4491-5	60PAR38/HAL/WFL40	23849-3	55PAR38/IRC+/WFL40
I4493-1	75PAR38/HAL/SP10	—	—
I4494-9	75PAR38/HAL/FL25	23865-9	55PAR38/IRC+/FL25
I4495-5	90PAR38/HAL/WFL40	13863-6	70PAR38/IRC+/WFL40
I4496-3	40PAR30S/IRC/HAL/SP10	23853-5	39PAR30S/IRC+/SP10
I4497-1	40PAR30S/IRC/HAL/FL25	23854-3	39PAR30S/IRC+/FL25
I4498-9	40PAR30S/IRC/HAL/WFL40	23854-3	39PAR30S/IRC+/FL25
I4499-7	50PAR30S/IRC+/SP10	23853-5	39PAR30S/IRC+/SP10
I4500-3	50PAR30S/IRC+/FL25	23854-3	39PAR30S/IRC+/FL25
I4501-1	50PAR30S/IRC+/WFL40	23854-3	39PAR30S/IRC+/FL25
I4502-9	40PAR38/IRC/HAL/SP10	—	—
I4503-7	40PAR38/IRC/HAL/FL25	23845-1	39PAR38/IRC+/FL25
I4504-5	40PAR38/IRC/HAL/WFL40	23845-1	39PAR38/IRC+/FL25
I4507-8	50PAR38/IRC/HAL/WFL40	23849-3	55PAR38/IRC+/WFL40
I4720-7	75PAR38/NLP/FL	23865-9	55PAR38/IRC+/FL25
I4989-8	60PAR30S/IRC/HAL/WFL40	23857-6	55PAR30S/IRC+/WFL40
I5004-5	60PAR30S/IRC/HAL/SP10	23855-0	55PAR30S/IRC+/SP10

* EISA Section 322 & DOE Rulemaking refers to energy efficiency standards for incandescent reflector lamps.

Halogen and Incandescent Replacement Guide

Incandescent Reflector Lamps Affected by EISA Section 322 & DOE Rulemaking*

Banned by Legislation		Halogen Replacement	
Product #	Ordering Code	Product #	Ordering Code
15007-8	60PAR30S/IRC/HAL/FL25	23856-8	55PAR30S/IRC+/FL25
15879-0	60BR30/HAL/FL	—	—
20231-7	45PAR38/HAL/FL25	23845-1	39PAR38/IRC+/FL25
20234-1	90PAR38/HAL/FL25	13862-8	70PAR38/IRC+/FL25
20257-2	60BR30/HAL/NLP/FL	—	—
20573-2	60BR40/HAL/NLP/FL	—	—
20579-9	60BR30/HAL/FL/LL	—	—
20580-7	60BR40/HAL/FL/LL	—	—
22486-5	60K19/DL	—	—
22906-2	50PAR20/HAL/SP10	45377-9	39PAR20/IRC+/SP10
22911-2	50PAR20/HAL/FL25	45378-7	39PAR20/IRC+/FL30
22921-1	50PAR20/HAL/FL25	45378-7	39PAR20/IRC+/FL30
22922-9	50PAR30L/HAL/SP10	23799-0	50PAR30L/IRC+/SP10
22923-7	50PAR30L/HAL/WSP16	23799-0	50PAR30L/IRC+/SP10
22925-2	50PAR30L/HAL/FL25	23429-4	50PAR30L/IRC+/FL25
22926-0	50PAR30L/HAL/FL25	23429-4	50PAR30L/IRC+/FL25
22927-8	50PAR30L/HAL/WFL40	23800-6	50PAR30L/IRC+/WFL40
22928-6	50PAR30L/HAL/WFL40	23800-6	50PAR30L/IRC+/WFL40
22930-2	75PAR30L/HAL/SP10	23799-0	50PAR30L/IRC+/SP10
22934-4	75PAR30L/HAL/WSP16	23799-0	50PAR30L/IRC+/SP10
22941-9	75PAR30L/HAL/FL25	23429-4	50PAR30L/IRC+/FL25
22943-5	75PAR30L/HAL/FL25	23429-4	50PAR30L/IRC+/FL25
22944-3	75PAR30L/HAL/WFL40	23800-6	50PAR30L/IRC+/WFL40
22945-0	75PAR30L/HAL/WFL40	23800-6	50PAR30L/IRC+/WFL40
22946-8	45PAR38/HAL/SP10	—	—
22947-6	45PAR38/HAL/SP10	—	—
22949-2	45PAR38/HAL/FL25	23845-1	39PAR38/IRC+/FL25
23069-8	90PAR38/HAL/SP10	13861-0	70PAR38/IRC+/SP10
23650-5	90PAR38/HAL/SP10	13861-0	70PAR38/IRC+/SP10
23651-3	90PAR38/HAL/FL25	13862-8	70PAR38/IRC+/FL25
26349-1	50PAR30S/HAL/SP10	23853-5	39PAR30S/IRC+/SP10
26357-4	50PAR30S/HAL/SP10	23853-5	39PAR30S/IRC+/SP10
26358-2	50PAR30S/HAL/FL25	23854-3	39PAR30S/IRC+/FL25
26362-4	50PAR30S/HAL/FL25	23854-3	39PAR30S/IRC+/FL25
26364-0	50PAR30S/HAL/WFL40	23854-3	39PAR30S/IRC+/FL25
26384-8	50PAR30S/HAL/WFL40	23854-3	39PAR30S/IRC+/FL25
26877-1	90PAR38/HAL/FL	13862-8	70PAR38/IRC+/FL25
26883-9	45PAR38/HAL/FL	23845-1	39PAR38/IRC+/FL25
27429-0	90PAR38/HAL/FL	13862-8	70PAR38/IRC+/FL25
28479-4	75PAR30S/HAL/SP10	23855-0	55PAR30S/IRC+/SP10
28488-5	75PAR30S/HAL/FL25	23856-8	55PAR30S/IRC+/FL25
28491-9	75PAR30S/HAL/WFL40	23857-6	55PAR30S/IRC+/WFL40
28492-7	75PAR30S/HAL/WFL40	23857-6	55PAR30S/IRC+/WFL40
30728-0	40K19/DL	—	—
35751-7	60PAR30S/HAL/SP10	23855-0	55PAR30S/IRC+/SP10
35752-5	60PAR30S/HAL/SP10	23855-0	55PAR30S/IRC+/SP10
35753-3	60PAR30S/HAL/FL25	23856-8	55PAR30S/IRC+/FL25
35758-2	60PAR30S/HAL/WFL40	23857-6	55PAR30S/IRC+/WFL40
35762-4	60PAR30S/HAL/WFL40	23857-6	55PAR30S/IRC+/WFL40
35788-9	60PAR30S/HAL/FL25	23856-8	55PAR30S/IRC+/FL25
38849-6	60BR30/HAL/FL	—	—
38875-1	60BR30/HAL/SP	—	—
38884-3	60PAR38/HAL/2FL	—	—
38886-8	90PAR38/HAL/2FL	—	—
38887-6	60PAR38/HAL/3FL	—	—
38925-4	90PAR38/HAL/FL	13862-8	70PAR38/IRC+/FL25
39174-8	60BR40/HAL/FL	22238-0	40BR40/HEA/FL

* EISA Section 322 & DOE Rulemaking refers to energy efficiency standards for incandescent reflector lamps.

Contents

	DuraMax Lamps Page 116		Natural Light Lamps Page 118		Incandescent Lamps by Wattage Page 119
	Decorative Lamps Blister- Carded Page 124		Decorative Lamps Boxed Page 125		All Other Decorative Lamps Page 126
	TuffGuard Coated Lamps Page 126				



Create a brighter standard

Dramatically changing the look of a room can be as easy as changing a light bulb.

Natural Light Lamps help you see things the way they should be. Natural Light's distinctive blue coating reduces dull light effects to provide light that is more vibrant and natural.

DuraMax Long Life Lamps reduce the hassle of replacing light bulbs every few months, since all DuraMax products last longer than standard incandescent light bulbs.

Philips family of Specialty Incandescents provide the perfect light for accent and display lighting as well as general lighting in a variety of applications. From tubular shapes and appliance bulbs, to colored lamps for special effects, this family of lamps is ideal for professional and consumer applications.

Incandescent Lamps

DuraMax Long Life

Watts	Bulb Base	Product Number	Symbols Footnotes	Ordering Code	Pkg. Volts	Qty. Description	Class Filament	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.)(93)	Approx. MBCP ¹	Lumens	Life Years (446)	Energy Cost (445)	Color Temp. (K)
DuraMax Long Life Soft White															
15	A15 Med.	16860-9	▲	15A/WL 12/2	120	24	Soft White Long Life	B, C-9	3½	3000		115	2.7	\$1.81	2700
25	A19 Med.	16868-2	▲	25A/WL 12/2	120	24	Soft White Long Life	C, CC-6	4%	3000		235	2.7	\$3.01	2700
30	A21 3 Ct. Med.	16947-4	(8)▲	30/100A/WL 12/1	120	12	Soft White Long Life 3-Way	C, 2CC-8	5%	1750		270	1.6	\$3.61	2600
70												840		\$8.43	2710
100												1110		\$12.05	2680
50	A21 3 Ct. Med.	16948-2	(8)▲	50/150A/WL 12/1	120	12	Soft White Long Life 3-Way	C, 2CC-8	5%	1750		465	1.6	\$6.02	2720
100												1165		\$12.05	2810
150												1665		\$18.07	2780
50	A21 3 Ct. Med.	16949-0	(8)▲	50/250A/WL 12/1	120	12	Soft White Long Life	C, 2CC-8	5%	1750		465	1.6	\$6.02	2770
200												2235		\$24.09	2860
250												2715		\$30.11	2820
200	A21 Med.	16867-4	▲	200A/WL 6/1	120	6	Soft White Long Life	C, CC-8	5%	1500		3100	1.4	\$24.09	2700

FTC REQUIREMENTS*

DuraMax Long Life Globes

25	G25 Med.	16748-6	▲	25G25/W/LL 12/1	120	12	White Long Life Globe	C, CC-6	4%	2000		210	1.8	\$3.01	2600
		16887-2	▲	25G25/CL/LL 12/1	120	12	Clear Long Life Globe	C, CC-6	4%	2000		235	1.8	\$3.01	2500
		16902-9	▲	25G25/W/LL 4/3	120	12	White Long Life Globe	C, CC-6	4%	2000		210	1.8	\$3.01	2600
40	G25 Med.	16903-7	▲	40G25/CL/LL 4/3	120	12	Clear Long Life Globe	C, CC-6	4%	2000		460	1.8	\$4.82	2620
		16904-5	▲	40G25/W/LL 4/3	120	12	White Long Life Globe	C, CC-6	4%	2000		415	1.8	\$4.82	2600
		16746-0	▲	40G25/W/LL 12/1	120	12	White Long Life Globe	C, CC-6	4%	2000		415	1.8	\$4.82	2600
		16747-8	▲	40G25/CL/LL 12/1	120	12	Clear Long Life Globe	C, CC-6	4%	2000		460	1.8	\$4.82	2620
60	G40 Med.	16851-8	▲	60G40/W/LL 6/1	120	6	White Long Life Globe	C, C-9	6%	3000		595	2.7	\$7.23	2550
		16852-6	▲	60G40/CL/LL 6/1	120	6	Clear Long Life Globe	C, C-9	6%	3000		665	2.7	\$7.23	2550
100	G40 Med.	16853-4	▲	100G40/W/LL 6/1	120	6	White Long Life Globe	C, C-9	6%	3000		985	2.7	\$12.05	2700

DuraMax Long Life Reflectors (87)

30	R20 Med.	16753-6	▲	30R20/LL 12/1	120	12	Frost Long Life Reflector	C, CC-6	3%	2500	350	205	2.3	\$3.61	2550
45	R20 Med.	20323-2	▲	45R20/LL 12/1	120	12	Long Life Reflector Flood	C, CC-6	3%	2500		385	2.3	\$5.42	2700
	BR30 Med.	16751-0	▲	45BR30/FL55/LL 12/1	120	12	Long Life Reflector Flood	C, CC-6	5%	2500		330	2.3	\$5.42	2600
65	BR30 Med.	16768-4	▲	65BR30/FL55/LL 12/1	120	12	Long Life Reflector Flood	C, CC-6	5%	2500	510	610	2.3	\$7.83	2690
		16769-2	▲	65BR30/SP20/LL 12/1	120	12	Long Life Reflector Spot	C, CC-6	5%	2500	530	620	2.3	\$7.83	2710
	BR40 Med.	16741-1	▲	65BR/FL60/LL 8/1	120	8	Long Life Reflector Flood	C, CC-6	6½	2500	500	625	2.3	\$7.83	2740

DuraMax Long Life Sparkling Clear

200	A23 Med.	16798-0	▲	200A/CL/LL 6/1	120	6	Clear Long Life	C, CC-8	6%	1500		3400	1.4	\$24.09	2700
-----	----------	---------	---	----------------	-----	---	-----------------	---------	----	------	--	------	-----	---------	------

For the most current product information, go to the e-catalog on www.philips.com
Incandescent symbols and footnotes located on page 128



Incandescent Lamps

DuraMax Long Life

Watts	Bulb Base	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.‡	Description	Class Filament	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.)(93)	Approx. MBCP ¹	Lumens	Life Years (446)	Energy Cost (445)	Color Temp. (K)
DuraMax Long Life Fan Lights															
FTC REQUIREMENTS*															
40	A15 Med.	16934-2	▲ *	BC40A15/FAN/CL/LL 6/2	120 12	Clear Long Life Fan	C, C-9	3½	2000			395	1.8	\$4.82	2700
		16935-9	▲ *	BC40A15/FAN/W/LL 6/2	120 12	White Long Life Fan	C, C-9	3½	2000			365	1.8	\$4.82	2700
60	A15 Med.	16945-8	▲ *	BC60A15/FAN/W/LL 6/2	120 12	White Long Life Fan	C, C-9	3½	2000			570	1.8	\$7.23	2500
		16946-6	▲ *	BC60A15/FAN/CL/LL 6/2	120 12	Clear Long Life Fan	C, C-9	3½	2000			630	1.8	\$7.23	2700

DuraMax Long Life Decoratives (12)

15	BA9 Cand.	16811-2	▲ *	BC15BA9C/CL/LL 6/2	120 12	Clear Long Life Bent Tip	B, C-7A	4¾	2200			110	2.0	\$1.81	2700
25	BA9 Cand.	16719-7	▲	BC25BA9C/CL/LL 6/4	120 24	Clear Long Life Bent Tip	C, CC-2V, C-7A	4¾	2200			150	2.0	\$3.01	2700
		16806-2	▲ *	BC25BA9C/CL/LL 6/2	120 12	Clear Long Life Bent Tip	C, CC-2V, C-7A	4¾	2200			150	2.0	\$3.01	2700
		16810-4	▲ *	BC25BA9C/F/LL 6/2	120 12	Frost Long Life Bent Tip	C, CC-2V, C-7A	4¾	2200			145	2.0	\$3.01	2700
	BA9½ Med.	16819-5	▲ *	BC25BA9½/CL/LL 6/2	120 12	Clear Long Life Bent Tip	C, CC-2V, C-7A	4¾	2200			150	2.0	\$3.01	2700
	B10½ Cand.	16824-5	▲ *	BC25B10½C/CL/LL 6/2	120 12	Clear Long Life Blunt Tip	C, C-7A	4¾	2200			150	2.0	\$3.01	2700
	CA8 Cand.	13568-1	▲ *	BC25CA8C/CL/LL 6/2	120 12	Clear Petite Long Life Bent Tip	C, CC-2V	3½	2000			220	1.8	\$3.01	2550
	F10 Cand.	16832-8	▲ *	BC25F10C/CL/LL 6/2	120 12	Clear Long Life Flame	B, C-7A	3½	2000			105	1.8	\$3.01	2500
	F15 Med.	16833-6	▲ *	BC25F15/CL/LL 6/2	120 12	Clear Long Life Flame	B, C-9	4½	2200			150	2.0	\$3.01	2500
	G16½ Cand.	16845-0	▲ *	BC25G16½C/CL/LL 6/2	120 12	Clear Long Life Globe	B, C-7A	3	2000			200	1.8	\$3.01	2500
		16847-6	▲ *	BC25G16½CW/LL 6/2	120 12	White Long Life Globe	B, C-7A	3	2000			165	1.8	\$3.01	2400
40	BA9 Cand.	16720-5	▲	BC40BA9C/CL/LL 6/4	120 24	Clear Long Life Bent Tip	C, CC-2V, C-7A	4¾	2200			300	2.0	\$4.82	2700
		16807-0	▲ *	BC40BA9C/CL/LL 6/2	120 12	Clear Long Life Bent Tip	C, CC-2V, C-7A	4¾	2200			300	2.0	\$4.82	2700
		16809-6	▲ *	BC40BA9C/F/LL 6/2	120 12	Frost Long Life Bent Tip	C, CC-2V, C-7A	4¾	2200			295	2.0	\$4.82	2700
	BA9½ Med.	16760-1	▲	BC40BA9½/CL/LL 6/4	120 24	Clear Long Life Bent Tip	C, CC-2V, C-7A	4¾	2200			300	2.0	\$4.82	2700
		16820-3	▲ *	BC40BA9½/CL/LL 6/2	120 12	Clear Long Life Bent Tip	C, CC-2V, C-7A	4¾	2200			300	2.0	\$4.82	2700
	B10½ Cand.	16825-2	▲ *	BC40B10½C/CL/LL 6/2	120 12	Clear Long Life Blunt Tip	C, CC-2V	4¾	2200			300	2.0	\$4.82	2700
	B13 Med.	16828-6	▲ *	BC40B13/CL/LL 6/2	120 12	Clear Long Life Blunt Tip	C, C-7A	4¾	2200			300	2.0	\$4.82	2700
	F15 Med.	16835-1	▲ *	BC40F15/CL/LL 6/2	120 12	Clear Long Life Flame	C, C-9	4½	2200			385	2.0	\$4.82	2700
		16837-7	▲ *	BC40F15/IR/LL 6/2	120 12	Iridescent Long Life Flame	C, C-9	4½	2200			370	2.0	\$4.82	2700
		16838-5	▲ *	BC40F15/W/LL 6/2	120 12	White Long Life Flame	C, C-9	4½	2200			300	2.0	\$4.82	2700
	G16½ Cand.	16846-8	▲ *	BC40G16½C/CL/LL 6/2	120 12	Clear Long Life Globe	C, CC-2V, C-7A	2¾	2000			300	1.8	\$4.82	2550
		16848-4	▲ *	BC40G16½CW/LL 6/2	120 12	White Long Life Globe	C, CC-2V, C-7A	2¾	2000			245	1.8	\$4.82	2550
	Med.	13537-6	▲ *	BC40G16½/CL/LL 6/2	120 12	Clear Long Life Globe	C, CC-2V	2¾	2200			300	2.0	\$4.82	2550

For the most current product information, go to the e-catalog on www.philips.com
Incandescent symbols and footnotes located on page 128



Incandescent Lamps

DuraMax Long Life

Watts	Bulb Base	Product Number	Symbols Footnotes	Ordering Code	Pkg. Volts	Qty. ‡	Description	Class Filament	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.) ⁽⁹³⁾	Approx. MBCP [†]	Lumens	Life Years ⁽⁴⁴⁶⁾	Energy Cost ⁽⁴⁴⁵⁾	Color Temp. (K)
DuraMax Long Life Decoratives Continued (12)																
60	BA9 Cand.	16808-8	▲ *	BC60BA9C/CL/LL 6/2	120	12	Clear Long Life Bent Tip	C, CC-2V, C-7A	4 1/16	2200			550	2.0	\$7.23	2700
		16721-3	▲	BC60BA9C/CL/LL 6/4	120	24	Clear Long Life Bent Tip	C, CC-2V, C-7A	4 1/16	2200			550	2.0	\$7.23	2700
		16805-4	▲ *	BC60BA9C/FL/LL 6/2	120	12	Frost Long Life Bent Tip	C, CC-2V, C-7A	4 1/16	2200			545	2.0	\$7.23	2700
	B10 1/2 Cand.	16826-0	▲ *	BC60B10 1/2 C/CL/LL 6/2	120	12	Clear Long Life Blunt Tip	C, CC-2V	4 1/16	2200			550	2.0	\$7.23	2700
	G16 1/2 Cand.	16699-0	▲ *	BC60G16 1/2 C/CL/LL 6/2	120	12	Clear Long Life Globe	C, CC-2V	2 3/4	2000			540	1.8	\$7.23	2700
Natural Light 3-Way																
50 100 150	A21 3 Ct. Med.	13564-0	(8)▲	50/150A/NTL 12/1	120	12	Natural Light 3-Way	C, 2CC-6	5 3/16	1200			395 1250 1740	1.1	\$6.02 \$12.05 \$18.07	2590 3100 3050
Natural Light Fan																
40	A15 Med.	13565-7	▲ *	BC40A15/FAN/NTL 6/2	120	12	Natural Light Fan	C, C-9	3 1/2	1500			340	1.4	\$4.82	3200
Natural Light Reflector																
65	BR30 Med.	13785-1	(87)▲	65BR30/FL/NTL 12/1	120	12	Natural Light Reflector	C, CC-6	5 3/8	2000			535	1.8	\$7.83	2730

For the most current product information, go to the e-catalog on www.philips.com
Incandescent symbols and footnotes located on page 128



Incandescent Lamps

Natural Light

Watts	Bulb Base	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.‡	Volts	Description	Class Filament	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.)(93)	Approx. MBCP ¹	Lumens	Life Years (446)	Energy Cost (445)	Color Temp. (K)
Incandescent Lamps by Wattage																
FTC REQUIREMENTS*																
1.5	T3	Cand.	41666-9 ▲*	BC1.5T3	4.5	24	Clear Flashlight	B, C-6	2	30			17	0.0	\$0.18	2700
4	C7	Cand.	25706-3 ▲*	BC4C7 12/2	120	24	Clear Night Light	B, C-7A	2½	3000			16	2.7	\$0.48	2700
			24741-1 ▲	BC4C7/4 12/4	120	48	Clear Night Light	B, C-7A	2½	3000			16	2.7	\$0.48	2700
			25708-9 ▲*	BC4C7/W 12/2	120	24	White Night Light	B, C-7A	2½	3000			14	2.7	\$0.48	2700
			41542-2 ▲	BC4C7/4	120	48	Clear Night Light	B, C-7A	2½	3000			16	2.7	\$0.48	2700
			T5	Wedge	41604-0	BC4T5/R/TP	12	24	Transparent Red Landscape	B, C-2R	1½	300			0.3	0.3
41606-5	BC4T5/B/TP	12			24	Transparent Blue Landscape	B, C-2R	1½	300			0.3	0.3	\$0.48	2700	
6	S6	Cand.	24835-1	6S6	120-130	48	Clear Indicator	B, C-7A	1½	1500			39	1.4	\$0.72	2700
			41609-9 ▲	BC6S6	12	24	Clear Indicator Light	B, C-2V	2	1500			50	1.4	\$0.72	2700
			41669-3 ▲	BC6S6	120	24	Clear Indicator Light	B, C-7A	2	1500			40	1.4	\$0.72	2700
7	C7	Cand.	37378-7 ▲	7C7	120-130	24	Clear Indicator	B, C-7A	2½	3000			45	2.7	\$0.84	2700
			25714-7 ▲*	BC7C7/W 12/2	120	24	White Night Light	B, C-7A	2½	3000			35	2.7	\$0.84	2700
			41546-3 ▲	BC7C7/4	120	96	Clear Night Light	B, C-7A	2½	3000			45	2.7	\$0.84	2700
			41547-1 ▲	BC7C7/W	120	48	White Night Light	B, C-7A	2½	3000			35	2.7	\$0.84	2700
7.5	S11	Med.	41544-8 ▲	BC7-1/2S11	120-130	12	Clear Night Light	B, C-7A	2¼	1400			45	1.3	\$0.90	2700
			41545-5 ▲	BC7-1/2S11	120	6	White Night Light	B, C-7A	2¼	1400			35	1.3	\$0.90	2700
10	S11	Inter.	41529-9 ▲	BC10S11N	120	12	Clear Appliance	B, C-7A/CC-2V	3	1500			1.4	\$1.20	2700	
11	S8	S.C. Bay	41665-1	BC118/SC/TP	12	24	Clear Landscape	B, C-2R	2	700			180	0.6	\$1.32	2700
			41672-7	BC11S14F 130V 6/1PK	130	6		B, C-9	3½	3000			70	2.7	\$1.32	2700
	S14	Med.	41664-4	BC11S14/CL 130V 6/1PK	130	6	Clear Sign	B, C-9	3½	3000			75	2.7	\$1.32	2700
			13830-5	11S14 120/130V 24/1	120-130	24		B, C-9	3½	3000			75	2.7	\$1.32	2700
13	S8	S.C. Bay	41671-9 *	BC93 12V 12/2	12	24	Clear Miniature	B, C-6	2	700			0.6	\$1.57	2700	
15	A15	Med.	14587-0 ▲	15A15/CL	120-130	60	Clear	B, C-9	2½	3½	2500		110	2.3	\$1.81	2700
			16860-9 ▲	15A/WL 12/2	120	24	Soft White Long Life	B, C-9	3½	3000			115	2.7	\$1.81	2700
	T6	Cand.	23582-0 ▲	15T6	120	24	Clear Switchboard	B, C-7A	3½	2000			110	1.8	\$1.81	2700
			24815-3 (63)▲	15T6	140-150	24	Clear Switchboard	B, C-7A	3½	2000			100	1.8	\$1.81	2700
			41610-7 (63)▲	BC15T6	140-150	24	Exit Sign	B, C-7A	3½	2000			100	1.8	\$1.81	2700
	T7	Cand.	41611-5 ▲	BC15T6C/TP	120	12	Clear Showcase	B, C-7A	3	1500			110	1.4	\$1.81	2700
			41612-3 (4)	BC15T7C	120	6	Clear Showcase	B, C-7A	2¼	1000			110	0.9	\$1.81	2700
T10	Med.	41613-1 (4)▲	BC15T7N 120V	120	6	Clear Appliance	B, C-7A	2¼	1000			100	0.9	\$1.81	2700	
		41584-4 ▲	BC15T10 6/1	120	6	Clear Showcase	B, C-9	5½	2500			120			2700	
20	T6½	Inter.	24853-4	20T6½F	120	24	Frost Exit Sign	B, C-8	5½	3000			150	4.6	\$2.41	2700
			41626-3	BC20T6½N/CL	120	6	Clear Exist Sign	B, C-8	5½	3000			160	2.7	\$2.41	2700

For the most current product information, go to the e-catalog on www.philips.com
Incandescent symbols and footnotes located on page 128



Incandescent Lamps

Watts	Bulb Base	Product Number	Symbols Footnotes	Ordering Code	Pkg. Volts	Qty. Description	Class Filament	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.)(93)	Approx. MBCP ¹	Lumens	Life Years (446)	Energy Cost (445)	Color Temp. (K)
Incandescent Lamps by Wattage (Continued)															
FTC REQUIREMENTS*															
25	A15 Med.	41533-1	▲	BC25A15/IF 12/1	120	12	Frost Appliance	B, C-9	3½	1000		210	0.9	\$3.01	2700
	R14 Inter.	41537-2	■	BC25R14N	120	6	Mini Refl. Lt. Fr.	C, CC-2V	3½	1500		150	1.4	\$3.01	2800
	S11 Inter.	41670-1		BC25S11N	120	12	Clear Appliance	B, C-7A	2	500		220	0.5	\$3.01	2700
	T6½ Inter.	41628-9		BC25T6½	120-130	6	Clear Appliance	B, C-8	6	1000		220	0.9	\$3.01	2700
	T7 Inter.	41627-1		BC25T7N	120	6	Clear Appliance	B, C-7A	2¼	1000		200	0.9	\$3.01	2700
	T10 Med.	13812-3	▲	25T10/IF 24/1	120-130	24	Frost Showcase	B, C-8	5%	1000		200	0.9	\$3.01	2700
		41585-1	▲	BC25T10/TP 6/1	120	6	Clear Showcase	B, C-8	5%	1000		250	0.9	\$3.01	2700
13813-1		▲	25T10 24/1	120-130	24	Clear Showcase	B, C-8	5%	1000		200	0.9	\$3.01	2700	
30	R20 Med.	16753-6	(87)▲	30R20/LL 12/1	120	12	Frost Long Life Reflector	C, CC-6	3¾	2500	335	205	2.3	\$3.61	2700
30 70 100	A21 3 Ct. Med.	36662-5	(8)▲	30/100A/W 12/1	120	12	Soft White 3-Way	C, 2CC-8	5%	1200		265	1.1	\$8.43	2570
												820		\$12.05	2680
												1090		\$4.10	2650
40	A15 Med.	29999-0	▲	BC40A15/CL/LL	120	12	Clear Long Life Appliance	C, C-9	3½	1750		400	1.6	\$4.82	2700
		41676-8	▲	BC40A15/LL	120	60	Clear Long Life Appliance	C, C-9	3½	1750		400	1.6	\$4.82	2700
		16934-2	▲	BC40A15/FAN/CL/LL 6/2	120	12	Clear Long Life Fan	C, C-9	3½	2000		395	1.8	\$4.82	2700
		16935-9	▲	BC40A15/FAN/W/LL 6/2	120	12	White Long Life Fan	C, C-9	3½	2000		365	1.8	\$4.82	2700
		13565-7	▲	BC40A15/FAN/N/LL 6/2	120	12	Natural Light Fan	C, C-9	3½	1500		340	1.4	\$4.82	2700
	R14 Inter. Med.	41539-8		BC40R14N 6/1	120	6	Light Fr. Mini. Refl.	C, CC-2V	2¾	1500		250	1.4	\$4.82	2700
		41538-0		BC-40R14/SP	120	6	Surge Proof Light Mini. Refl.	C, CC-2V	2¾	1500		250	1.4	\$4.82	2700
	R16 Med.	41540-6		BC40R16/SP 6/1	120	6	Surge Proof Light Mini. Refl.	C, CC-2V	3%	1500		250	1.4	\$4.82	2700
	S11 Inter.	41541-4	▲	BC40S11/N TP 16/1	120	16	Clear High Intensity	C, CC-2V	2¼	500		440	0.5	\$4.82	2700
	T6½ Inter.	41629-7		BC40T6-1/2	120	6	Clear Appliance	B, C-8	5½	1000		350	0.9	\$4.82	2700
	T8 Inter.	41625-5		BC40T8N	130	6	Clear Appliance	C, C-7A	2¼	1000		400	0.9	\$4.82	2700
	T10 Med.	41673-5	▲	BC40T10/IF/TP 6/1	120	6	Frost Showcase	B, C-8	5%	1000		250	0.9	\$4.82	2700
		41586-9	▲	BC40T10/TP 6/1	120	6	Clear Showcase	B, C-8	5%	1000		435	0.9	\$4.82	2700
		13815-6	▲	40T10 24/1	120-130	24	Clear Showcase	B, C-8	5%	1000		440	0.9	\$4.82	2700
	BR30 Med.	16751-0	(87)▲	45BR30/FL55/LL 12/1	120	12	Long Life Reflector Flood	C, CC-6	5%	2500		330	2.3	\$5.42	2600
	R20 Med.	20323-2	(87)▲	45R20/LL 12/1	120	12	Long Life Reflector Flood	C, CC-6	3¾	2500		385	2.3	\$5.42	2700
		20322-4	(87)▲	45R20 12/1	130	12	Reflector Flood	C, CC-6	3¾	2000		380	1.8	\$5.42	2700
22314-9		(87)▲	45R20/LL 120V 4/3 TP	120	4	Long Life Reflector Flood	C, CC-6	3¾	2000		385	2.3	\$5.42	2700	
22311-5		(87)▲	45R20 120V 12/1	120	12	Reflector Flood	C, CC-6	3¾	2000		380	1.8	\$5.42	2700	
50		A19 Med.	43256-1		50A 24V	24	6	Marine	C, C-6	4¼	1000		825	0.9	\$6.02
41526-5			50A/RV	12	6	Marine	C, C-6	4¼	1000		875	0.9	\$6.02	2700	
14977-3	(66)▲		50A/RS/TF	120-130	120	Frost Rough Service Silicone Coated	B, C-17A	3¾	1000			0.9	\$6.02	2700	
ER30 Med.	14355-2	(87)▲	50ER30	120-130	24	Elliptical Reflector	C, CC-6	6%	2000		430	1.8	\$6.02	2710	

For the most current product information, go to the e-catalog on www.philips.com
Incandescent symbols and footnotes located on page 128



Incandescent Lamps

Watts	Bulb Base	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty. ‡	Description	Class Filament	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.) ⁽⁹³⁾	Approx. MBCP [†]	Lumens	Life Years (446)	Energy Cost (445)	Color Temp. (K)
Incandescent Lamps by Wattage (Continued)															
FTC REQUIREMENTS*															
50	R20 Med.	41531-5	(19,87)▲†	50R20/Agro 12/1	120 12	Agro-Lite Plant Light	C, CC-6	3 5/16		2000			1.8	\$6.02	
50	A21 3 Ct. Med.	13564-0	(8)▲	50/150A/NTL 12/1	120 12	Natural Light Reflector	C,2CC-6	5 5/16		1200		395	1.1	\$6.02	2590
100												1115		\$12.05	3100
150												1510		\$18.07	3050
		16948-2	(8)▲	50/150A/WL 12/1	120 12	Soft White Long Life 3-Way	C, 2CC-8	5 5/16		1750		465	1.6	\$6.02	2720
												1165		\$12.05	2810
												1660		\$18.07	2780
60	A15 Med.	16945-8	▲	BC60A15/FANW/LL 6/2	120 12	White Long Life Fan	C, C-9	3 1/2		2000		570	1.8	\$7.23	2700
		16946-6	▲	BC60A15/FANCL/LL 6/2	120 12	Clear Long Life Fan	C, C-9	3 1/2		2000		630	1.8	\$7.23	2700
	A19 Med.	14979-9	(66)▲	60A/TF	120 120	Frost Silicone Coated	C, CC-6	4 3/8		1000			0.9	\$7.23	
	Med. ++	41543-0	▲†	BC60A/CL/GDO 6/2	120 6	Garage Door Opener	C,C-9	4 3/8		3500		630	3.2	\$7.23	2700
	Med.	41581-0	□▲†✓	60A/YL 12/2	120 24	Bug-A-Way Yellow Longer Life	C, CC-6	4 3/8		1350			1.2	\$7.23	
65	BR30 Med.	24876-5	(87)▲✓	65BR30/FL55 12/1	120 12	Reflector Flood	C, CC-6	5 1/2		2000		620	1.8	\$7.83	2710
		24884-9	(87)▲✓	65BR30/FL55	130 12	Reflector Flood	C, CC-6	5 1/2		2000		450	1.8	\$7.83	2660
		40886-4	†	65BR30 4 Pk 120V 36/4	120 36	Reflector Flood	C, CC-6	5 1/2		2000		605	1.8	\$7.83	2660
		20190-5	(87)▲	65BR30/FL55/TG 12/1	120 12	TuffGuard Coated Reflector Fl.	C, CC-6	5 1/2		2000		635	1.8	\$7.83	2710
		13785-1	(87)▲	65BR30/FL/NTL 12/1	120 12	Natural Light Reflector	C, CC-6	5 1/2		2000		535	1.8	\$7.83	2730
		14007-9	(87)	65BR30/FL 12/1 PRO	130 12	ProPack Reflector	C, CC-6	5 1/2		2000		605	1.8	\$7.83	2640
		29380-3		65BR30/FL55 SP 12/1	120 12	Surge Proof Reflector	C, CC-6	5 1/2		3000		585	2.7	\$7.83	2660
	BR40 Med.	22537-5	(87)▲	65BR/FL60	130 24	Reflector Flood	C, CC-6	6 1/2		2000		565	1.8	\$7.83	2710
		14008-7	(87)	65BR40/FL 12/1 PRO	130 12	ProPack Reflector	C, CC-6	6 1/2		2000		565	1.8	\$7.83	2710
		16741-1	(87)▲	65BR/FL60/LL 8/1	120 8	Long Life Reflector Flood	C, CC-6	6 1/2		2500	500	625	2.3	\$7.83	2740
		38913-0	(87)▲	65BR/FL60 24/1	120 24	Long Life Reflector Flood	C, CC-6	6 1/2		2000	500	620	1.8	\$7.83	2710
75	A19 Med.	41532-3	▲†	75A/BLB	120 6	Black Light	C-9	4 3/8		1000			0.9	\$9.03	
		29360-5	▲	75A/RS/VS	120-130	Frost Rough & Vib. Svc. Ratings @ 120V =70W	R, C-9	2 1/2 3 3/8		1000 1700		712 660	0.9 1.6	\$9.03 \$8.43	2800
	A21 Med.	41527-3	(66)▲†	75A/RH/TF 12/1	120-130	Frost Silicone Coated Tough Bulb	C, RC-9	5 1/8		1000		750	0.9	\$9.03	2800
		20470-1	▲	75A/RH 12/1	120-130	Frost Rough House Ratings @ 120V =70W	C, RC-9	5 1/8		1000 1700		750 730	0.9 1.6	\$9.03 \$8.43	2800
	BR30 Med.	24903-7	(66,87)▲	75BR30/FL/TF	120 12	Frost Silicone Coated Reflector	C, CC-6	5 1/2		2000			1.8	\$9.03	
		41528-1	(87)▲†	75BR30/AGRO 6/1	120 6	Agro-Lite Plant Light	C, CC-6	5 1/2		2000		700	1.8	\$9.03	
		24902-9	(87)▲	75BR30/PK 8/1	120 8	Pink	C, CC-6	5 1/2		2000		555	1.8	\$9.03	2120

For the most current product information, go to the e-catalog on www.philips.com
Incandescent symbols and footnotes located on page 128



Incandescent Lamps

Watts	Bulb Base	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Volts	Qty. Description	Class Filament	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.)(93)	Approx. MBCP ¹	Life Years (446)	Energy Cost (445)	Color Temp. (K)
Incandescent Lamps by Wattage (Continued)														
FTC REQUIREMENTS*														
100	A21 Med.	14971-6	(66)▲	100A/RS/TF	120-130	60 Frost Silicone Coated Rough Service	C, RC-9		5%	1000		1347	0.9	\$12.05 2740
		27550-3	▲	100A/RS	250	60 Frost Rough Service	C, RC-9		5%	1000		1030	0.9	\$12.05 2740
		15927-7		100A/RS/V5/BR/TG	120-130	60 TuffGuard Frost Rough & Vibration Svc. Ratings @ 120V =94W	C, RC-9		5%	1000	1700	945	1.6	\$11.32
BR38 Med.		38532-8	(29, 82)	100PAR/1/B 6/1	120	6 Blue BR38	C, CC-6		5%	2000		1.8	\$12.05	
		38530-2	(29, 82)	100PAR/1/G 6/1	120	6 Green BR38	C, CC-6		5%	2000		1.8	\$12.05	
		38529-4	(29, 82)	100PAR/1/R 6/1	120	6 Red BR38	C, CC-6		5%	2000		1.8	\$12.05	
		38766-2	(29, 82)	100PAR/1/Y 6/1	120	6 Yellow BR38	C, CC-6		5%	2000		1.8	\$12.05	
PAR38 Med. Skt.		14550-8	(29, 82)	100PAR38/HEAT/CL	120	12 Clear PAR Infrared	C, C-9		5%	5000		4.6	\$12.05	
100 200 300	PS25 3 Ct. Mog.	36734-2	(8)▲	100/300W 12/1	120	12 Soft White 3-Way	C, 2CC-6		6%	1200		1320	1.1	\$12.05 2700
											3300		\$24.09 2700	
											4620		\$36.14 2700	
116	A21 Med.+	22483-2	(12)	116A21/TS	120	120 Traffic Signal Clear	C, C-9	2%	4%	8000		1180	7.3	\$13.97
		22485-7	(12)	116A21/TS	130	120 Traffic Signal Clear	C, C-9	2%	4%	8000		1180	7.3	\$13.97
120	BR40 Med.	41530-7	(87)▲†	120BR/Agro 6/1	120	6 Agro-Lite Plant Light	C, CC-6		6%	2000		1.8	\$14.45	
125	BR40 Med.	15930-1	(27,87,89)▲	125BR40/1/TG 4/1	120	4 TuffGuard Coated Clear Reflector Infrared	C, C-9		6%	5000		4.6	\$15.06	
		41675-0	(27,87,89)▲†	125BR40/1	120	4 Clear Infrared	C, C-9		6%	5000		4.6	\$15.06	
150	A21 Med.	27003-3	▲✓	150A	120	48 Frost	C, C-9		5%	750		2620	0.7	\$18.07 2840
		37418-1	(82)▲	150A/CL	120-130	60 Clear; Ratings @ 130V = 158W Ratings @ 120V = 139W	C, CC-8	3%	5%	750		2770	0.7	\$18.07 2870
												2120	1.2	\$16.74 2780
		14969-0	(66)▲	150A21/RS/TF	120-130	60 High-Temp. Coating	C, RC-9		5%	1000		0.9	\$18.07	
		27578-4	▲	150A21/RS/BR	120-130	60 Frost Rough & Vibration Service Ratings @ 120V = 141W	C, RC-9		5%	1000	1700	2205	0.9	\$18.07 2700
												1915	1.6	\$16.98 2700
		43163-5	†	150/RS/TF 120-130V 8/1 PK	120-130	8 Frost Silicone Coated Tough Bulb	C, RC-9		5%	1000		2205	0.9	\$18.07
27588-3	▲	150A/35/RS/BR	120-130	60 Frost Industrial Rough Service Ratings @ 120V = 141W	C, RC-9	3%	5%	3500	5900	1640	3.2	\$18.07		
										1425	5.4	\$16.98		
BR38 Med.		38568-2		150BR38/5FL	130	12 Flood Anti-Vibration	C, C-11V		5%	5000		965	4.6	\$18.07 2550
175	PAR38 Med. Skt.	14551-6	(27,89)	175PAR38/HEAT/CL	120	12 Clear Infrared	C, C-9		5%	5000		4.6	\$21.08 2550	
200	A21 Med.	16867-4	▲	200A/WL 6/1	120	6 Soft White Long Life	C, CC-2V		5%	1500		3100	1.4	\$24.09 2700
		A23 Med.	16798-0	▲	200A/CL/LL 6/1	120	6 Clear Long Life	C, CC-8		6%	1500		3400	1.4
		36291-3	▲	200A	130	60 Frost Ratings @ 120V = 176W	C, CC-2V		6%	750	2120	3600	0.7	\$24.09 2700
											2700	1.9	\$21.20 2700	
		37427-2	▲	200A/CL	120-130	60 Clear	C, CC-2V	4%	6%	750		3600	0.7	\$24.09 2700
		28176-6	▲	200A/99	120-130	60 Frost Extended Service Ratings @ 120V = 187W	C, CC-2V		6%	2500	4250	3250	2.3	\$24.09 2700
										2830	3.9	\$22.52 2700		
PS30 Med.		14304-0	▲	200PS30/23	120-130	60 Frost Ratings @ 120V = 177W	C, C-9		8%	1000		2800	0.9	\$24.09 2700
											2130	2.6	\$21.32 2700	
		14305-7	(66)▲	200PS30/RS/TF	120-130	60 Frost Rough Service Silicone Coated	C, C-9		8%	1000		2200	0.9	\$24.09

For the most current product information, go to the e-catalog on www.philips.com
Incandescent symbols and footnotes located on page 128



Incandescent Lamps

Watts	Bulb Base	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Qty.‡	Volts	Description	Class Filament	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.)(93)	Approx. MBCP [†]	Life Years (446)	Energy Cost (445)	Color Temp. (K)
Incandescent Lamps by Wattage (Continued)															
FTC REQUIREMENTS*															
250	BR40 Med.	41674-3	(27,87)▲†	250BR40/I 4/I	120	4	Clear Reflector Infrared	C, C-9	6½	5000			4.6	\$30.11	
		20205-1	(27,87)▲	250BR40/I/TG 4/I	120	4	TuffGuard Coated Clr. Ref. Infrared	C, C-9	6½	5000			4.6	\$30.11	
	PAR38 Med. Skt.	37432-2	(53,82)□	K250PAR38/FL	120-130	12	PAR Floodlight (Krypton)	C, CC-6	5½	4000	5000	3100	3.7	\$30.11	
	R40 Med.	41583-6	(27,87,89)▲†	250R40/HR 4/I	120	4	Red Bowl Heat Ray	C, C-9	6½	5000			4.6	\$30.11	
		15932-7	(27,87,89)▲	250R40/HR/TG 4/I	120	4	TuffGuard Ctd. Red Bowl Heat Ray	C, C-9	6½	5000			4.6	\$30.11	
300	BR40 Med.	14343-8	(87)▲	300BR/FL 130	120-130	24	Reflector Flood	C, CC-11	6½	2000		3182	1.8	\$36.14	2700
	PS25 Med.	28177-4	▲	300M/IF	120-130	60	Frost Ratings @120V=282W	C, CC-8	6½	750		6230	0.7	\$36.14	2700
		38941-1	▲	300M/IF	120	6	Frost	C, CC-8	6½	750		5471	1.2	\$33.97	2700
		13391-8	▲	300M	120-130	12	Clear Ratings @120V=265W	C, CC-8	5¼	6½	750	6300	0.7	\$36.14	2700
	PS30 Med.	14307-3	▲	300M/PS30IF	120-130	60	Frost Ratings @120V=265W	C, C-9	8½	750		5000	0.7	\$36.14	2700
					130	24	Clear Ratings @120V=265W	C, C-9	7	9½	1000	4600	0.9	\$36.14	2700
	PS35 Mog.	14316-4	▲	300/IF	120-130	12	Frost Ratings @120V=265W	C, C-9	9½	1000		4600	0.9	\$36.14	2700
					130	24	Clear Ratings @120V=265W	C, C-9	7	9½	1000	3495	2.6	\$31.92	2700
	R40 Med.	14432-9	■	300R/FL/I	120-130	24	Reflector Flood Frost	C, C-2V	6½	2000		2960	1.8	\$36.14	
					130	24	Clear Ratings @120V=442W	C, C-9	7	9½	1000	8900	0.9	\$60.23	2700
500	PS35 Mog.	14407-1		500	120-130	24	Clear Ratings @120V=442W	C, C-9	7	9½	1000	8700	0.9	\$60.23	2700
					130	24	Frost Ratings @120V=442W	C, C-9	9½	1000	8700	0.9	\$60.23	2700	
					130	24	Clear Ratings @120V=442W	C, C-9	9½	1000	8700	0.9	\$60.23	2700	
	R40 Med.	14430-3	(31,37,51,53)■	500R/3FL/2S	120-130	24	Swimming Pool Ratings @120V=442W	C, C-7A	6½	2000		6120	1.8	\$60.23	
					130	24	Frost Reflector Flood	CC-11	7¼	2000	5000	1.8	\$60.23	2700	
	Mog.	14435-2	(51,53)	500R/3FL	120-130	24	Frost Reflector Flood	CC-11	7¼	2000		4700	1.8	\$60.23	2700
		14435-2	(51,53)	500R/3FL	250	24	Frost Reflector Fl. Special Svc.	C, C-7A	7¼	2000		4700	1.8	\$60.23	2700

For the most current product information, go to the e-catalog on www.philips.com
Incandescent symbols and footnotes located on page 128



Incandescent Lamps

Watts	Bulb Base	Product Number	Symbols Footnotes	Ordering Code	Pkg. Volts	Qty. Description	Class Filament	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.)(93)	Approx. MBCP ¹	Lumens	Life Years (446)	Energy Cost (445)	Color Temp. (K)	
Decoratives, Blister-Carded (12)													FTC REQUIREMENTS*			
15	BA9 Cand.	16811-2	▲	BC15BA9C/CL/LL 6/2	120	12 Clear Long Life Bent Tip	B, CC-2V, C-7A	4 ³ / ₁₆		2200		110	2.0	\$1.81	2700	
25	BA9 Cand.	16719-7	▲	BC25BA9C/CL/LL 6/4	120	24 Clear Long Life Bent Tip	C, CC-2V, C-7A	4 ³ / ₁₆		2200		150	2.0	\$3.01	2700	
		16806-2	▲	BC25BA9C/CL/LL 6/2	120	12 Clear Long Life Bent Tip	C, CC-2V, C-7A	4 ³ / ₁₆		2200		150	2.0	\$3.01	2700	
		16810-4	▲	BC25BA9C/F/LL 6/2	120	12 Frost Long Life Bent Tip	C, CC-2V, C-7A	4 ³ / ₁₆		2200		145	2.0	\$3.01	2700	
		13823-0	▲	BC25BA9C/CL 6/1 TP	12	6 Clear Bent Tip	C, CC-2V, C-7A	4 ³ / ₁₆		2200			2.0	\$3.01	2700	
	BA9 ¹ / ₂ Med.	16819-5	▲	BC25BA9 ¹ / ₂ /CL/LL 6/2	120	12 Clear Long Life Bent Tip	C, CC-2V, C-7A	4 ³ / ₁₆		2200		150	2.0	\$3.01	2700	
	B10 ¹ / ₂ Cand.	16824-5	▲	BC25B10 ¹ / ₂ /C/CL/LL 6/2	120	12 Clear Long Life Blunt Tip	C, CC-2V, C-7A	4 ³ / ₁₆		2200		150	2.0	\$3.01	2700	
	CA8 Cand.	13568-1	▲	BC25CA8C/CL/LL 6/2	120	12 Clear Petite Long Life Bent Tip	C, CC-2V	3 ¹ / ₁₆		2000		220	1.8	\$3.01	2550	
	F10 Cand.	16832-8	▲	BC25F10C/CL/LL 6/2	120	12 Clear Long Life Flame	B, C-7A	3 ¹ / ₁₆		2000		105	1.8	\$3.01	2500	
	F15 Med.	16833-6	▲	BC25F15/CL/LL 6/2	120	12 Clear Long Life Flame	B, C-9	4 ¹ / ₁₆		2200		150	2.0	\$3.01	2700	
	G16 ¹ / ₂ Cand.	16845-0	▲	BC25G16 ¹ / ₂ /C/CL/LL 6/2	120	12 Clear Long Life Globe	B, C-7A	3		2000		200	1.8	\$3.01	2500	
		16847-6	▲	BC25G16 ¹ / ₂ /C/W/LL 6/2	120	12 White Long Life Globe	B, C-7A	3		2000		165	1.8	\$3.01	2500	
40	BA9 Cand.	16720-5	▲	BC40BA9C/CL/LL 6/4	120	24 Clear Long Life Bent Tip	C, CC-2V, C-7A	4 ³ / ₁₆		2200		300	2.0	\$4.82	2700	
		16807-0	▲	BC40BA9C/CL/LL 6/2	120	12 Clear Long Life Bent Tip	C, CC-2V, C-7A	4 ³ / ₁₆		2200		300	2.0	\$4.82	2700	
		16809-6	▲	BC40BA9C/F/LL 6/2	120	12 Frost Long Life Bent Tip	C, CC-2V, C-7A	4 ³ / ₁₆		2200		295	2.0	\$4.82	2700	
	BA9 ¹ / ₂ Med.	16760-1	▲	BC40BA9 ¹ / ₂ /CL/LL 6/4	120	24 Clear Long Life Bent Tip	C, CC-2V, C-7A	4 ³ / ₁₆		2200		300	2.0	\$4.82	2700	
		16820-3	▲	BC40BA9 ¹ / ₂ /CL/LL	120	12 Clear Long Life Bent Tip	C, CC-2V, C-7A	4 ³ / ₁₆		2200		300	2.0	\$4.82	2700	
	B10 ¹ / ₂ Cand.	16825-2	▲	BC40B10 ¹ / ₂ /C/CL/LL 6/2	120	12 Clear Long Life Blunt Tip	C, CC-2V	4 ³ / ₁₆		2200		300	2.0	\$4.82	2700	

For the most current product information, go to the e-catalog on www.philips.com
Incandescent symbols and footnotes located on page 128



Incandescent Lamps

Watts	Bulb Base	Product Number	Symbols, Footnotes	Ordering Code	Pkg. Volts	Qty.‡	Description	Class Filament	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.)(93)	Approx. MBCP ¹	Lumens	Life Years (446)	Energy Cost (445)	Color Temp. (K)	
Decoratives, Blister-Carded (Continued) (12)														FTC REQUIREMENTS*			
40	B13 Med.	16828-6	▲	BC40B13/CL/LL 6/2	120	12	Clear Long Life Blunt Tip	C, C-7A	4/16		2200		300	2.0	\$4.82	2700	
	F15 Med.	16835-1	▲	BC40F15/CL/LL 6/2	120	12	Clear Long Life Flame	C, C-9	4/16		2200		385	2.0	\$4.82	2700	
		16837-7	▲	BC40F15/IR/LL 6/2	120	12	Iridescent Long Life Flame	C, C-9	4/16		2200		370	2.0	\$4.82	2700	
		16838-5	▲	BC40F15/W/LL 6/2	120	12	White Long Life Flame	C, C-9	4/16		2200		300	2.0	\$4.82	2700	
	G16 1/2 Cand.	16846-8	▲	BC40G16 1/2/CL/LL 6/2	120	12	Clear Long Life Globe	C, CC-2V, C-7A	3		2000		300	1.8	\$4.82	2550	
		16848-4	▲	BC40G16 1/2/CW/LL 6/2	120	12	White Long Life Globe	C, CC-2V, C-7A	3		2000		245	1.8	\$4.82	2550	
	Med.	13537-6	▲	BC40G16 1/2/CL/LL 6/2	120	12	Clear Long Life Globe	C, CC-2V, C-7A	2 3/4		2000		300	1.8	\$4.82	2550	
60	BA9 Cand.	16808-8	▲	BC60BA9C/CL/ 6/2	120	12	Clear Long Life Bent Tip	C, CC-2V, C-7A	4/16		2200		550	2.0	\$7.23	2700	
		16721-3	▲	BC60BA9C/CL/LL 6/4	120	24	Clear Long Life Bent Tip	C, CC-2V, C-7A	4/16		2200		550	2.0	\$7.23	2700	
		16805-4	▲	BC60BA9C/F/LL 6/2	120	12	Frost Long Life Bent Tip	C, CC-2V, C-7A	4/16		2200		545	2.0	\$7.23	2700	
	B10 1/2 Cand.	16826-0	▲	BC60B10 1/2/CL/LL 6/2	120	12	Clear Long Life Blunt Tip	C, CC-2V	4/16		2200		550	2.0	\$7.23	2700	
	G16 1/2 Cand.	16699-0	▲	BC60G16 1/2/CL/LL 6/2	120	12	Clear Long Life Globe	C, CC-2V	3		2000		540	1.8	\$7.23	2700	
Decoratives, Boxed (12)																	
40	BA9 Cand.	31093-8	▲	40BA9C/4M	120	25	Clear Bent Tip	C, C-7A, CC-2V	4/16		4000		270	3.7	\$4.82	2700	

For the most current product information, go to the e-catalog on www.philips.com
Incandescent symbols and footnotes located on page 128



Incandescent Lamps

Watts	Bulb Base	Product Number	Symbols Footnotes	Ordering Code	Pkg. Qty.‡	Description	Class Filament	LCL (In.)	MOL (In.)	Rated Avg. Life (Hrs.)(93)	Approx. MBCP [†]	Lumens	Life Years (446)	Energy Cost (445)	Color Temp. (K)	
Decoratives, All Others													FTC REQUIREMENTS*			
25	G25 Med.	16887-2	▲	25G25/CL/LL 12/1	120	12	Clear Long Life Globe	C, CC-6	4 ⁷ / ₁₆	2000		235	1.8	\$3.01	2500	
		16748-6	▲	25G25/W/LL 12/1	120	12	White Long Life Globe	C, CC-6	4 ⁷ / ₁₆	2000		210	1.8	\$3.01	2600	
		16902-9	▲	25G25/W/LL 4/3	120	12	White Long Life Globe	C, CC-6	4 ⁷ / ₁₆	2000		210	1.8	\$3.01	2600	
40	G25 Med.	16747-8	▲	40G25/CL/LL 12/1	120	12	Clear Long Life Globe	C, CC-6	4 ⁷ / ₁₆	2000		460	1.8	\$4.82	2550	
		16746-0	▲	40G25/W/LL 12/1	120	12	White Long Life Globe	C, CC-6	4 ⁷ / ₁₆	2000		415	1.8	\$4.82	2600	
		16903-7	▲	40G25/CL/LL 4/3	120	12	Clear Long Life Globe	C, CC-6	4 ⁷ / ₁₆	2000		460	1.8	\$4.82	2550	
	G40 Med.	16904-5	▲	40G25/W/LL 4/3	120	12	White Long Life Globe	C, CC-6	4 ⁷ / ₁₆	2000		415	1.8	\$4.82	2600	
		16857-5	▲	40G40/CL/LL 6/1	120	6	Clear Long Life Globe	C, C-9	6 ³ / ₁₆	3000		372	2.7	\$4.82	2550	
60	G40 Med.	16858-3	▲	40G40/W/LL 6/1	120	6	White Long Life Globe	C, C-9	6 ³ / ₁₆	3000		335	2.7	\$4.82	2550	
		16851-8	▲	60G40/W/LL 6/1	120	6	White Long Life Globe	C, C-9	6 ³ / ₁₆	3000		595	2.7	\$7.23	2550	
100	G40 Med.	16852-6	▲	60G40/CL/LL 6/1	120	6	Clear Long Life Globe	C, C-9	6 ³ / ₁₆	3000		665	2.7	\$7.23	2550	
		16853-4	▲	100G40/W/LL 6/1	120	6	White Long Life Globe	C, C-9	6 ³ / ₁₆	3000		985	2.7	\$12.05	2550	

TuffGuard Incandescent Coated Lamps

65	BR30 Med.	20190-5 (87) ▲ ✓	65BR30/FL55/TG 120V 12/1		120	12		2000	Made to Order				1.8	\$7.83	
75	A19 Med.	15933-5	▲	75A/TG 130V 48/1		120	48	750	Stocked				0.7	\$9.03	
		20192-1	▲	75A/RS/V/TG		120-130	12	1000	Stocked				0.9	\$9.03	
	A21 Med.	15927-7		100A/RS/VS/BR/TG 120/130V 60/1	120	60	1000	Stocked				0.9	\$12.05		
125	BR40 Med.	15930-1 (27,87,89)	125BR40/1/TG 120V 4/1		120	4	5000	Stocked				4.6	\$15.06		
250	R40 Med.	15932-7 (27,87,89)	250R40/HR/TG 120V 4/1		120	4	5000	Stocked				4.6	\$30.11		
	BR40 Med.	20205-1 (27,87)	250BR40/1/TG 120V 4/1		120	4	5000	Stocked				4.6	\$30.11		

For the most current product information, go to the e-catalog on www.philips.com
Incandescent symbols and footnotes located on page 128




Incandescent Lamps


Filament Designations, Base Types and Bulb Shapes

Filament Designations (Not Actual Sizes)

Filament designations consist of a letter or letters to indicate how the wire is coiled and an arbitrary number sometimes followed by a letter to indicate the arrangement of the filament on the supports. Prefix letters include C (coil)—wire is wound into a helical coil or it may be deeply fluted; CC (coiled coil)—wire is wound into a helical coil and this coiled wire again wound into a helical coil. Some of the more commonly used types of filament arrangements are illustrated.

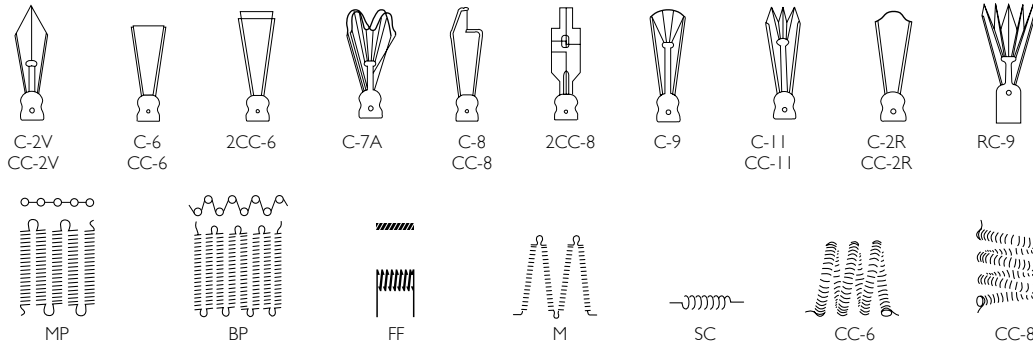


Base Types (Not Actual Sizes)

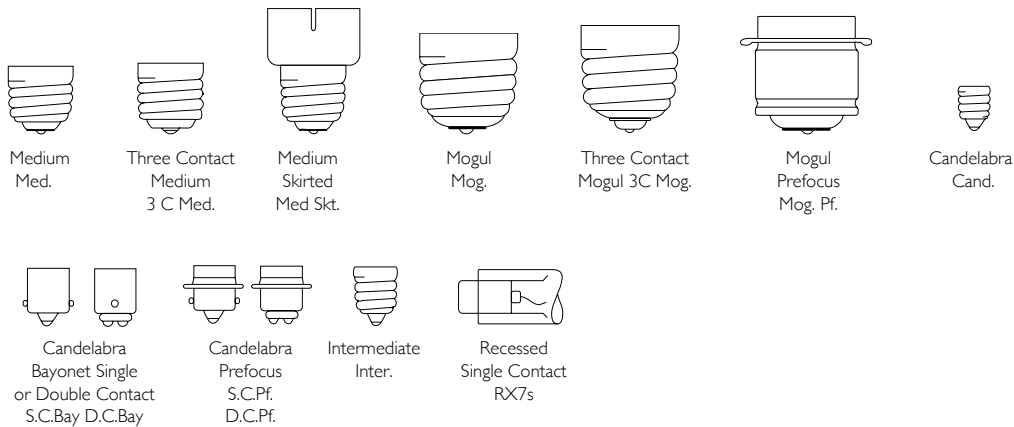

Bulb Shapes (Not Actual Sizes)

The size and shape of a bulb is designated by a letter or letters followed by a number. The letter indicates the shape of the bulb while the number indicates the diameter of the bulb in eighths of an inch. For example, "T10" indicates a tubular shaped bulb having a diameter of $\frac{10}{8}$ or $1\frac{1}{4}$ inches. The following illustrations show some of the more popular bulb shapes and sizes.

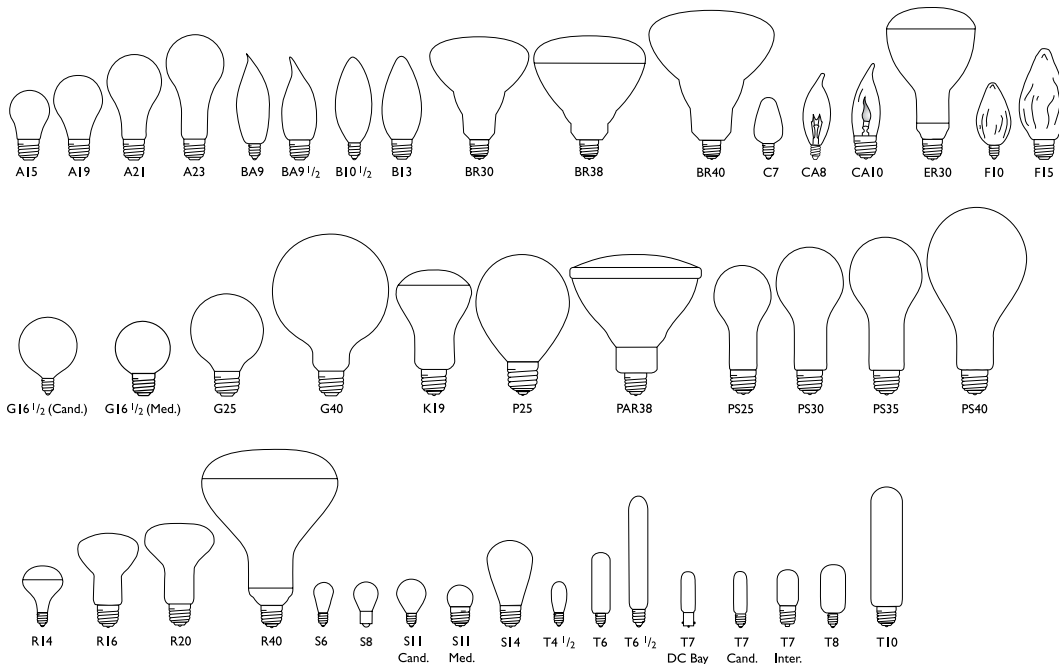

Incandescent Lamps

Symbols and Footnotes

For the most current product information, go to the e-catalog on www.philips.com

- Exclusive to Philips Lighting North America Corporation
- Nickel plated brass base
- ▲ Aluminum base
- ★ Heat resisting glass bulb
- Maximum Beam Candlepower
- © This Bulb Meets US Federal Minimum Efficiency Standard
- † New since last printing
- * Two Lamp Carded Pack
- ‡ Quantity shown is minimum shipping container—refer to Net Price Schedule for number of lamps to qualify as a standard case.
- ✓ Consider the compact fluorescent lamps listed on pages 52–69 or the energy saving halogen listed on pages 102–105 for energy savings
- G = General Lighting
- S = Street Lighting
- ▼ PAR38 (one piece)
- ¥ For more information about FTC requirements please see rule 16 CFR part 305 @ www.ftc/os/2000/02/16cfr305.
- + Pursuant to California law, these incandescent lamps cannot be used or offered for sale for use in traffic signals in the State of California.
- ++ Pursuant to California law, these incandescent lamps cannot be used or offered for sale in the State of California.

- (4) Average laboratory life is 200 hours for vacuum cleaner and 600 hours for sewing machine service. Design life 1000 hours.
- (8) Operate base down.
- (12) Operate base down to horizontal.
- (14) Operate base up.
- (18) Base is medium left hand thread.
- (19) May not give satisfactory performance if any accessory equipment is attached to or touches the glass bulb.
- (27) Average laboratory life in excess of 5000 hours. In-service life depends upon service conditions.
- (29) Suitable for indoor and outdoor service.
- (31) Operate only in porcelain sockets.
- (37) Should not be used in equipment where the base temperature will exceed 500°F.
- (43) Unless otherwise noted, may be operated in any position, but lumen maintenance is best when operated vertically base up.
- (46) Stippled, rounded cover.
- (51) Light output is maintained best when operated within 45° of vertically base up.
- (53) The bulb, though made of heat-resistant glass, may break if moisture falls on it. Not recommended for use in enclosed, close-fitting housings.
- (63) Design volts 145.
- (64) For use only in equipment specially designed to maintain bulb and base temperature within safe limits.
- (66) Silicone Coating reduces lumen output from Standard Values less than 3%.
- (82) **CAUTION:** To avoid deterioration of lampholder by heat, use only heat resistant lampholders or fixtures listed by a nationally recognized electrical testing organization for use with reflector or PAR lamps.
- (87) Do not allow hot bulb to come in contact with liquid or metal parts of the fixture, as glass may shatter. Do not use outdoors. Do not operate in close proximity to flammable materials or those adversely affected by heat or drying. Operate only in heat resistant sockets.
- (89) **CAUTION:** Do not operate in close proximity to flammable materials or those adversely affected by heat or drying. Operate only in heat resistant sockets.
- WARNING:** Use carefully. May cause serious burns. Do not use over insensitive skin areas or in the presence of poor circulation. The unattended use of infrared heat by children or incapacitated persons may be dangerous.
- Lamp should not be placed closer than 18" to the surface being irradiated.
- Do not use for therapeutic or topical applications unless recommended by a physician.
- For food warming, use only lamps with heat resisting glass.
- (93) Rated average life is the length of operation (in hours) at which point an average of 50% of the lamps will still be operational and 50% will not.
- WARNING:** For indoor use only.
- (445) Estimated energy cost is based on 3 hrs/day, 11¢/kWh. Cost depends on rates and use.
- (446) Life in years is based on 3 hrs/day.

Halogen and Incandescent Replacement Guide

General Service Incandescent Lamps Affected by EISA Section 321*

Banned by Legislation		Professional and Consumer Replacement	
Product Number	Ordering Code	Product Number	Ordering Code
13254-8	100A/W 12/4	40982-1	72A19/EV
13255-5	100A/W/TP 24/4	40982-1	72A19/EV
13423-9	100G25/W/LL 12/1	—	—
13560-8	75A/NTL 12/4	22696-9	53A19/EV/NTL
13561-6	100A/NTL 12/4	22699-3	72A19/EV/NTL
13684-6	100A	40982-1	72A19/EV
13996-3	75A/CL 120/1 PRO	41048-0	72A19/EV/CL
13997-1	75A 120/1 PRO	40982-1	72A19/EV
13998-9	100A/CL 120/1 PRO	41048-0	72A19/EV/CL
13999-7	100A 120/1 PRO	40982-1	72A19/EV
14297-5	200/99IF	—	—
14997-0	75A/W 12/4	40982-1	72A19/EV
15000-3	75A-67A/99/EV	40982-1	72A19/EV
15001-1	100A-90A/99EV	40982-1	72A19/EV
15002-9	150A-135A/99/EV	—	—
15008-6	100A/CL/LL 12/2	41048-0	72A19/EV/CL
15009-4	150A/CL/LL 12/1 TP	—	—
15129-0	75A/NTL/2X 12/4	22696-9	53A19/EV/NTL
15130-8	100A/NTL/2X 12/4	22699-3	72A19/EV/NTL
16739-5	75A/WL 24/4	40982-1	72A19/EV
16740-3	100A/WL 24/4	40982-1	72A19/EV
16801-3	75A/CL/LL 12/2	41048-0	72A19/EV/CL
16844-3	100F20/POSTLT/CL/LL 6/1	42385-5	BC72F15/EV/CL
16850-0	100G30/W/LL 6/1	—	—
16862-5	100A/WL 12/4	40982-1	72A19/EV
16866-6	150A/WL 12/1	—	—
16879-9	75A/WL 12/4	40982-1	72A19/EV
21386-8	BC70BT15/HAL/W	40982-1	72A19/EV
21443-7	38A/W/TP 12/4	40984-7	43A19/EV
21444-5	38A/CL	41050-6	29A19/EV/CL
21446-0	38A/CL/LL 12-2 WP TP	41050-6	29A19/EV/CL
21447-8	38A/WL/TP 12/4	40983-9	29A19/EV
21452-8	57A/CL/LL/TP 12/2	41049-8	43A19/EV/CL
21453-6	71A/W/TP 24/4	40982-1	72A19/EV
21454-4	71A	40982-1	72A19/EV
21455-1	71A/CL/LL 120V 12/2 WP TP	41048-0	72A19/EV/CL
21459-3	95A	40982-1	72A19/EV
21460-1	95A/W 24/4	40982-1	72A19/EV
21461-9	95A/WL 24/4	40982-1	72A19/EV
21463-5	57A/CL	40984-7	43A19/EV
21466-8	57A	40984-7	43A19/EV
21469-2	71A	40982-1	72A19/EV
21470-0	71A/CL	41048-0	72A19/EV/CL
21473-4	95A/CL	41048-0	72A19/EV/CL
21474-2	95A	40982-1	72A19/EV
21497-3	57A 12/4	40984-7	43A19/EV
21498-1	57A/W/TP 12/4	40984-7	43A19/EV
21499-9	57A/WL 12/4 TP	40984-7	43A19/EV
21501-2	71A/W/TP 12/4	40982-1	72A19/EV

* EISA Section 321 refers to energy efficiency standards for general service incandescent lamps.

Halogen and Incandescent Replacement Guide

General Service Incandescent Lamps Affected by EISA Section 321*

Banned by Legislation		Professional and Consumer Replacement	
Product Number	Ordering Code	Product Number	Ordering Code
21502-0	71A/WL 24/4	40982-1	72A19/EV
21503-8	71A/WL /TP 12/4	40982-1	72A19/EV
21504-6	95A/W/TP 12/4	40982-1	72A19/EV
21818-0	95A/WL 12/4	40982-1	72A19/EV
22240-6	75A-67A/EW	40982-1	72A19/EV
22241-4	75A-67A/EW	40982-1	72A19/EV
22243-0	100A-90A/EW	40982-1	72A19/EV
22244-8	100A-90A/EW	40982-1	72A19/EV
22430-3	100A23	—	—
22979-9	100A/99	40982-1	72A19/EV
23415-3	75A 120V 24-2LP/SL W/P	40982-1	72A19/EV
24135-6	75A/WL	40982-1	72A19/EV
24927-6	BC75BT15/HAL/W	40982-1	72A19/EV
24931-8	BC100BT15/HAL/W	40982-1	72A19/EV
26836-7	135A25/35	—	—
27069-4	150A	—	—
27083-5	75A 12/4	40982-1	72A19/EV
28171-7	100A21	—	—
28172-5	150A23	—	—
28173-3	150	—	—
28174-1	150PS25/99	—	—
28175-8	150A-135A/EW	—	—
31305-6	75A21	—	—
37406-6	75A/99	40982-1	72A19/EV
37411-6	100A21/35	—	—
37417-3	150A/99	—	—
37460-3	100A21/99	—	—
37472-8	75A	40982-1	72A19/EV
37473-6	75A	40982-1	72A19/EV
37474-4	100A	40982-1	72A19/EV
37476-9	100A	40982-1	72A19/EV
37485-0	75A/W 12/4	40982-1	72A19/EV
37486-8	75A/W/TP 24/4	40982-1	72A19/EV
37525-3	75A/CL	41048-0	72A19/EV/CL
37527-9	100A/CL	41048-0	72A19/EV/CL
40948-2	57A/W/TP	40984-7	43A19/EV

* EISA Section 321 refers to energy efficiency standards for general service incandescent lamps.

Halogen and Incandescent Replacement Guide

Incandescent Reflector Lamps Affected by EISA Section 322 & DOE Rulemaking*

Banned by Legislation		Professional Replacement		Consumer Replacement	
Product #	Ordering Code	Product #	Ordering Code	Product #	Ordering Code
13401-5	45PAR38/HAL/FL/LL	23845-1	39PAR38/IRC+/FL25	41942-4	39PAR38/EV/FL25
13402-3	90PAR38/HAL/FL/LL	13862-8	70PAR38/IRC+/FL25	41940-8	72PAR38/EV/FL25
13403-1	90PAR38/HAL/FL/LL	13862-8	70PAR38/IRC+/FL25	41940-8	72PAR38/EV/FL25
13404-9	45PAR38/HAL/SP/LL	23844-4	39PAR38/IRC+/SP10	41943-2	39PAR38/EV/SP10
13405-6	90PAR38/HAL/SP/LL	13861-0	70PAR38/IRC+/SP10	41938-2	72PAR38/EV/SP10
13407-2	50PAR30L/HAL/FL/LL	23429-4	50PAR30L/IRC+/FL25	41974-7	39PAR30L/EV/FL25
13408-0	75PAR30L/HAL/FL/LL	23429-4	50PAR30L/IRC+/FL25	41954-9	53PAR30L/EV/FL25
13409-8	75PAR30L/HAL/SP/LL	23799-0	50PAR30L/IRC+/SP10	41956-4	53PAR30L/EV/SP10
13410-6	50PAR20/HAL/FL/LL	15216-5	20PAR20E/HAL/FL25	41986-1	39PAR20/EV/FL25
13411-4	50PAR20/HAL/SP/LL	15216-5	20PAR20E/HAL/FL25	41973-9	39PAR20/EV/SP10
13467-6	75PAR30S/HAL/FL25	23856-8	55PAR30S/IRC+/FL25	42143-8	53PAR30S/EV/FL25
13846-1	50PAR20/HAL/SP10	40494-7	20PAR20E/HAL/SP10	41973-9	39PAR20/EV/SP10
13848-7	75PAR30L/HAL/SP10	23799-0	50PAR30L/IRC+/SP10	41956-4	53PAR30L/EV/SP10
13849-5	75PAR30S/HAL/SP10	23855-0	55PAR30S/IRC+/SP10	42112-3	53PAR30S/EV/SP10
13853-7	50PAR30S/IRC/HAL/SP10	23853-5	39PAR30S/IRC+/SP10	42112-3	53PAR30S/EV/SP10
13854-5	50PAR30S/IRC/HAL/FL25	23854-3	39PAR30S/IRC+/FL25	42143-8	53PAR30S/EV/FL25
13855-2	50PAR30S/IRC/HAL/WFL40	23854-3	39PAR30S/IRC+/FL25	—	—
13856-0	45PAR38/IRC/HAL/FL25	23845-1	39PAR38/IRC+/FL25	41942-4	39PAR38/EV/FL25
13857-8	45PAR38/IRC/HAL/WFL40	23849-3	55PAR38/IRC+/WFL40	—	—
13858-6	55PAR38/IRC/HAL/SP10	14505-2	50PAR38/IRC+/SP10	41945-7	53PAR38/EV/SP10
13859-4	55PAR38/IRC/HAL/FL25	14506-0	50PAR38/IRC+/FL25	41944-0	53PAR38/EV/FL25
13860-2	55PAR38/IRC/HAL/WFL40	14507-8	50PAR38/IRC/WFL40	—	—
13864-4	90PAR38/IRC/HAL/SP10	13861-0	70PAR38/IRC+/SP10	—	—
13865-1	90PAR38/IRC/HAL/FL25	13862-8	70PAR38/IRC+/FL25	42498-5	83PAR38/EV/FL25/LL
13866-9	90PAR38/IRC/HAL/WFL40	13863-6	70PAR38/IRC+/WFL40	—	—
13873-5	60PAR38/IRC/HAL/SP10	23847-7	55PAR38/IRC+/SP10	41938-2	72PAR38/EV/SP10
13874-3	60PAR38/IRC/HAL/FL25	23865-9	55PAR38/IRC+/FL25	41940-8	72PAR38/EV/FL25
13875-0	60PAR38/IRC/HAL/WFL40	23849-3	55PAR38/IRC+/WFL40	—	—
13879-2	60PAR38/IRC/HAL/FL25	23865-9	55PAR38/IRC+/FL25	41940-8	72PAR38/EV/FL25
13918-8	60PAR38/IRC/HAL/WFL40	23849-3	55PAR38/IRC+/WFL40	—	—
13919-6	45PAR38/IRC/HAL/SP10	23844-4	39PAR38/IRC+/SP10	41943-2	39PAR38/EV/SP10
13920-4	60PAR38/IRC/HAL/SP10	23847-7	55PAR38/IRC+/SP10	41938-2	72PAR38/EV/SP10
14022-8	60PAR38/HAL/FL/LL	23845-1	39PAR38/IRC+/FL25	42128-9	39PAR38/EV/FL25/LL
14482-4	60PAR38/HAL/SP10	23844-4	39PAR38/IRC+/SP10	41944-0	53PAR38/EV/FL25
14483-2	60PAR38/HAL/FL25	23845-1	39PAR38/IRC+/FL25	41945-7	53PAR38/EV/SP10
14484-0	60PAR38/HAL/WFL40	23849-3	55PAR38/IRC+/WFL40	—	—
14485-7	75PAR38/HAL/SP10	23847-7	55PAR38/IRC+/SP10	41945-7	53PAR38/EV/SP10
14486-5	75PAR38/HAL/FL25	23865-9	55PAR38/IRC+/FL25	41944-0	53PAR38/EV/FL25
14487-3	90PAR38/HAL/WFL40	13863-6	70PAR38/IRC+/WFL40	—	—
14488-1	60PAR38/HAL/SP10	23844-4	39PAR38/IRC+/SP10	41944-0	53PAR38/EV/FL25
14489-9	60PAR38/HAL/FL25	23845-1	39PAR38/IRC+/FL25	41945-7	53PAR38/EV/SP10
14490-7	60PAR38/HAL/FL25	23845-1	39PAR38/IRC+/FL25	41945-7	53PAR38/EV/SP10
14491-5	60PAR38/HAL/WFL40	23849-3	55PAR38/IRC+/WFL40	—	—
14493-1	75PAR38/HAL/SP10	23847-7	55PAR38/IRC+/SP10	41945-7	53PAR38/EV/SP10
14494-9	75PAR38/HAL/FL25	23865-9	55PAR38/IRC+/FL25	41944-0	53PAR38/EV/FL25
14495-5	90PAR38/HAL/WFL40	13863-6	70PAR38/IRC+/WFL40	—	—
14496-3	40PAR30S/IRC/HAL/SP10	23853-5	39PAR30S/IRC+/SP10	42111-5	39PAR30S/EV/SP10
14497-1	40PAR30S/IRC/HAL/FL25	23854-3	39PAR30S/IRC+/FL25	42110-7	39PAR30S/EV/FL25
14498-9	40PAR30S/IRC/HAL/WFL40	23854-3	39PAR30S/IRC+/FL25	42110-7	39PAR30S/EV/FL25
14499-7	50PAR30S/IRC+/SP10	23853-5	39PAR30S/IRC+/SP10	42112-3	53PAR30S/EV/SP10
14500-3	50PAR30S/IRC+/FL25	23854-3	39PAR30S/IRC+/FL25	42143-8	53PAR30S/EV/FL25
14501-1	50PAR30S/IRC+/WFL40	23854-3	39PAR30S/IRC+/FL25	—	—
14502-9	40PAR38/IRC/HAL/SP10	23844-4	39PAR38/IRC+/SP10	41943-2	39PAR38/EV/SP10
14503-7	40PAR38/IRC/HAL/FL25	23845-1	39PAR38/IRC+/FL25	41942-4	39PAR38/EV/FL25
14504-5	40PAR38/IRC/HAL/WFL40	23845-1	39PAR38/IRC+/FL25	41942-4	39PAR38/EV/FL25
14507-8	50PAR38/IRC/HAL/WFL40	23849-3	55PAR38/IRC+/WFL40	—	—
14720-7	75PAR38/NLP/FL	23865-9	55PAR38/IRC+/FL25	41944-0	53PAR38/EV/FL25
14989-8	60PAR30S/IRC/HAL/WFL40	23857-6	55PAR30S/IRC+/WFL40	—	—
15004-5	60PAR30S/IRC/HAL/SP10	23855-0	55PAR30S/IRC+/SP10	42112-3	53PAR30S/EV/SP10

* EISA Section 322 & DOE Rulemaking refers to energy efficiency standards for incandescent reflector lamps.















Halogen and Incandescent Replacement Guide

Incandescent Reflector Lamps Affected by EISA Section 322 & DOE Rulemaking*

Banned by Legislation		Professional Replacement		Consumer Replacement	
Product #	Ordering Code	Product #	Ordering Code	Product #	Ordering Code
15007-8	60PAR30S/IRC/HAL/FL25	23856-8	55PAR30S/IRC+/FL25	42143-8	53PAR30S/EV/FL25
15879-0	60BR30/HAL/FL	21359-5	40BR30/HEA/FL	42118-0	50BR30/EV/FL
20231-7	45PAR38/HAL/FL25	23845-1	39PAR38/IRC+/FL25	41942-4	39PAR38/EV/FL25
20234-1	90PAR38/HAL/FL25	13862-8	70PAR38/IRC+/FL25	41940-8	72PAR38/EV/FL25
20257-2	60BR30/HAL/NLP/FL	—	—	—	—
20573-2	60BR40/HAL/NLP/FL	—	—	—	—
20579-9	60BR30/HAL/FL/LL	21359-5	40BR30/HEA/FL	42118-0	50BR30/EV/FL
20580-7	60BR40/HAL/FL/LL	22238-0	40BR40/HEA/FL	42116-4	40BR40/EV/FL
22486-5	60KI9/DL	—	—	—	—
22906-2	50PAR20/HAL/SP10	40494-7	20PAR20E/HAL/SP10	41973-9	39PAR20/EV/SP10
22911-2	50PAR20/HAL/FL25	15216-5	20PAR20E/HAL/FL25	41986-1	39PAR20/EV/FL25
22921-1	50PAR20/HAL/FL25	15216-5	20PAR20E/HAL/FL25	41986-1	39PAR20/EV/FL25
22922-9	50PAR30L/HAL/SP10	23799-0	50PAR30L/IRC+/SP10	42303-8	39PAR30L/EV/SP10
22923-7	50PAR30L/HAL/WSP16	23799-0	50PAR30L/IRC+/SP10	42303-8	39PAR30L/EV/SP10
22925-2	50PAR30L/HAL/FL25	23429-4	50PAR30L/IRC+/FL25	41942-4	39PAR38/EV/FL25
22926-0	50PAR30L/HAL/FL25	23429-4	50PAR30L/IRC+/FL25	41942-4	39PAR38/EV/FL25
22927-8	50PAR30L/HAL/WVFL40	23800-6	50PAR30L/IRC+/WVFL40	—	—
22928-6	50PAR30L/HAL/WVFL40	23800-6	50PAR30L/IRC+/WVFL40	—	—
22930-2	75PAR30L/HAL/SP10	23799-0	50PAR30L/IRC+/SP10	41956-4	53PAR30L/EV/SP10
22934-4	75PAR30L/HAL/WSP16	23799-0	50PAR30L/IRC+/SP10	41956-4	53PAR30L/EV/SP10
22941-9	75PAR30L/HAL/FL25	23429-4	50PAR30L/IRC+/FL25	41954-9	53PAR30L/EV/FL25
22943-5	75PAR30L/HAL/FL25	23429-4	50PAR30L/IRC+/FL25	41954-9	53PAR30L/EV/FL25
22944-3	75PAR30L/HAL/WVFL40	23800-6	50PAR30L/IRC+/WVFL40	—	—
22945-0	75PAR30L/HAL/WVFL40	23800-6	50PAR30L/IRC+/WVFL40	—	—
22946-8	45PAR38/HAL/SP10	23844-4	39PAR38/IRC+/SP10	41943-2	39PAR38/EV/SP10
22947-6	45PAR38/HAL/SP10	23844-4	39PAR38/IRC+/SP10	41943-2	39PAR38/EV/SP10
22949-2	45PAR38/HAL/FL25	23845-1	39PAR38/IRC+/FL25	41942-4	39PAR38/EV/FL25
23069-8	90PAR38/HAL/SP10	13861-0	70PAR38/IRC+/SP10	41938-2	72PAR38/EV/SP10
23650-5	90PAR38/HAL/SP10	13861-0	70PAR38/IRC+/SP10	41938-2	72PAR38/EV/SP10
23651-3	90PAR38/HAL/FL25	13862-8	70PAR38/IRC+/FL25	41940-8	72PAR38/EV/FL25
26349-1	50PAR30S/HAL/SP10	23853-5	39PAR30S/IRC+/SP10	—	—
26357-4	50PAR30S/HAL/SP10	23853-5	39PAR30S/IRC+/SP10	—	—
26358-2	50PAR30S/HAL/FL25	23854-3	39PAR30S/IRC+/FL25	—	—
26362-4	50PAR30S/HAL/FL25	23854-3	39PAR30S/IRC+/FL25	—	—
26364-0	50PAR30S/HAL/WVFL40	23854-3	39PAR30S/IRC+/FL25	—	—
26384-8	50PAR30S/HAL/WVFL40	23854-3	39PAR30S/IRC+/FL25	—	—
26877-1	90PAR38/HAL/FL	13862-8	70PAR38/IRC+/FL25	41940-8	72PAR38/EV/FL25
26883-9	45PAR38/HAL/FL	23845-1	39PAR38/IRC+/FL25	41942-4	39PAR38/EV/FL25
27429-0	90PAR38/HAL/FL	13862-8	70PAR38/IRC+/FL25	41946-5	72PAR38/EV/FL25
28479-4	75PAR30S/HAL/SP10	23855-0	55PAR30S/IRC+/SP10	42112-3	53PAR30S/EV/SP10
28488-5	75PAR30S/HAL/FL25	23856-8	55PAR30S/IRC+/FL25	42143-8	53PAR30S/EV/FL25
28491-9	75PAR30S/HAL/WVFL40	23857-6	55PAR30S/IRC+/WVFL40	—	—
28492-7	75PAR30S/HAL/WVFL40	23857-6	55PAR30S/IRC+/WVFL40	—	—
30728-0	40KI9/DL	—	—	—	—
35751-7	60PAR30S/HAL/SP10	23855-0	55PAR30S/IRC+/SP10	42112-3	53PAR30S/EV/SP10
35752-5	60PAR30S/HAL/SP10	23855-0	55PAR30S/IRC+/SP10	42112-3	53PAR30S/EV/SP10
35753-3	60PAR30S/HAL/FL25	23856-8	55PAR30S/IRC+/FL25	42143-8	53PAR30S/EV/FL25
35758-2	60PAR30S/HAL/WVFL40	23857-6	55PAR30S/IRC+/WVFL40	—	—
35762-4	60PAR30S/HAL/WVFL40	23857-6	55PAR30S/IRC+/WVFL40	—	—
35788-9	60PAR30S/HAL/FL25	23856-8	55PAR30S/IRC+/FL25	42143-8	53PAR30S/EV/FL25
38849-6	60BR30/HAL/FL	21359-5	40BR30/HEA/FL	42118-0	50BR30/EV/FL
38875-1	60BR30/HAL/SP	—	—	—	—
38884-3	60PAR38/HAL/2FL	—	—	—	—
38886-8	90PAR38/HAL/2FL	—	—	—	—
38887-6	60PAR38/HAL/3FL	38890-0	90PAR38/HAL/3FL	—	—
38925-4	90PAR38/HAL/FL	13862-8	70PAR38/IRC+/FL25	41941-6	72PAR38/EV/FL25
39174-8	60BR40/HAL/FL	22238-0	40BR40/HEA/FL	42116-4	40BR40/EV/FL

* EISA Section 322 & DOE Rulemaking refers to energy efficiency standards for incandescent reflector lamps.

Contents

	Photo Projection Lamps Page 136		Stage/ Studio/TV Lamps Page 137		High Volt SSTV Halogen Lamps Page 138
	MSR Lamps Page 140		MSD Lamps Page 141		MSI Lamps Page 141
	Fast Fit Lamps Page 142		Platinum Lamps Page 142		Ceramic ST Lamps Page 143
	Short Arc Lamps Page 143		Fluorescent Lamps with Super Actinic Radiation Page 143		UVA 365nm Peak Lamps Page 144
	Germicidal Sterilamp 254nm Lamps Page 145		TUV T5 Page 147		



Philips FastFit Lamps feature a rear loading base system which enables easy lamp replacement.

Reliable, high quality lamps provide ultimate performance

Philips HPL+ Lamps with P3 technology enable flexible burning positions to ensure accurate aiming and supply of light wherever it is needed. HPL+ lamps are now designed to last longer, making them ideal for theater, studio and event lighting.

Philips FastFit is a new lamp concept for Single Ended MSR Gold and Halogen Hi-Brite lamp types. The rear load base system enables easy lamp replacement and adjustments in seconds in difficult stage conditions. The overall lamp length is reduced making more compact and lighter fixture designs possible.

Philips Germicidal T5 Sterilamp featuring ALTO Lamp Technology uses UV technology, which allows for the emission of UVC energy to disinfect water, therefore the Philips Germicidal T5 Sterilamp is a cost effective and environmentally responsible disinfection alternative to chemical treatment of waste water.

† UVC is a band of ultraviolet radiation with wavelengths shorter than 280 nanometers.



HPL+ Lamps



MSR Hot Restrike Lamps



FastFit Lamps



TUV Amalgam XPT System



Germicidal T5 Sterilamp

Page	139	140	142	145	147
------	-----	-----	-----	-----	-----

Specialty Lamps

Photo Projection Lamps

ANSI Code	Product Number	Pkg. Qty.	Volts	Avg. Watts (Amps)	Bulb	Base	Rated Avg. Life (Hrs.)*	Coil Type	LCL (In.)	LCL (mm.)	MOL (In.)	MOL (mm.)	Rated Approx. Lumens	Color Temp (K)	Operating Position
BRL	31627-3	24	12	50	T3.5	G6.35	50	C-6	1 $\frac{3}{8}$	30	1 $\frac{3}{4}$	44.0	1500	3400	BDTH
DDL	31509-3	24	20	150	MR16	GX5.3	500	CC-6	—	—	1 $\frac{3}{4}$	45.0	—	3150	BDTH
DZA	28117-0	100	10.8	30	T5	G5.3	1000	—	—	—	1 $\frac{3}{4}$	47.0	570	3100	BDTH
EFN	31502-8	50	12	75	MR16	GZ6.35	50	C-6	—	—	1 $\frac{3}{4}$	42.0	—	3350	BDTH
EFP	31488-0	50	12	100	MR16	GZ6.35	50	C-6	—	—	1 $\frac{3}{4}$	42.0	—	3350	BDTH
EFR	31490-6	50	15	150	MR16	GZ6.35	50	C-6	—	—	1 $\frac{3}{4}$	42.0	—	3350	BDTH
EFP/SH	13163-1	50	12	100	MR16	GZ6.35	500	—	—	—	1 $\frac{3}{4}$	42.0	580	3400	ANY
EFR/SH	13656-4	50	15	150	MR16	GZ6.35	500	—	—	—	1 $\frac{3}{4}$	42.0	720	3400	ANY
EHJ	31758-6	100	24	250	T4	G6.35	50	C-6F	1 $\frac{3}{8}$	33	2 $\frac{1}{2}$	55.0	9400	3400	BD
EHJ-X	23175-3	200	24	250	T4	G6.35	50	C-6F	1 $\frac{3}{8}$	33	2 $\frac{1}{2}$	55.0	10,000	3400	BD
EJA	44142-8	24	21	150	MR16	GX5.3	40	CC-6	—	—	1 $\frac{3}{4}$	45.0	—	3350	BDTH
EJL	31508-5	24	24	200	MR16	GX5.3	50	CC-6	—	—	1 $\frac{3}{4}$	45.0	—	3400	BDTH
EJM	23942-6	24	21	150	MR16	GX5.3	40	CC-6	—	—	1 $\frac{3}{4}$	45.0	—	3400	BDTH
EKE	31592-9	24	21	150	MR16	GX5.3	200	CC-6	—	—	1 $\frac{3}{4}$	45.0	—	3400	BDTH
ELC	50709-5	50	24	250	R50	GX5.3	35	—	—	—	1 $\frac{3}{4}$	45.0	—	3400	BDTH
ELC/FA	23103-5	24	24	250	MR16	GX5.3	50	CC-6	—	—	1 $\frac{3}{4}$	45.0	—	3400	BDTH
ELC/5H	38166-5	24	24	250	MR16	GX5.3	500	CC-6	—	—	1 $\frac{3}{4}$	45.0	—	3400	BDTH
ELC/10H	13658-0	24	24	250	MR16	GX5.3	1000	CC-6	—	—	1 $\frac{3}{4}$	45.0	—	3400	BDTH
ELD	31618-2	24	21	150	MR16	GX5.3	40	CC-6	—	—	1 $\frac{3}{4}$	45.0	—	3350	BDTH
ELH	31619-0	24	120	300	MR16	GY5.3	35	CC-8	—	—	1 $\frac{3}{4}$	45.0	—	3350	BDTH
ENH	31621-6	24	120	250	MR16	GV5.3	175	CC-8	—	—	1 $\frac{3}{4}$	45.0	—	3250	BDTH
EPZ/DJT	31496-3	50	13.8	50	MR16	GX5.3	1000	—	—	—	1 $\frac{3}{4}$	45.0	—	3150	BDTH
ESA/FHD	26126-3	100	6	10	T2.5	G4	100	C-6	$\frac{7}{8}$	19.6	1 $\frac{1}{2}$	30.0	200	3200	ANY
ESB	25678-4	100	6	20	T3	G4	100	C-6	$\frac{7}{8}$	19.5	1 $\frac{1}{2}$	31.0	420	3200	ANY
EVA	25676-8	100	12	100	T3.5	GY6.35	1000	C-6F	1 $\frac{3}{8}$	30	1 $\frac{3}{4}$	44.0	2500	3200	ANY
EVC	31884-0	24	24	250	T5	G6.35	300	C-6F	1 $\frac{3}{8}$	33	2 $\frac{1}{4}$	57.0	8400	3200	ANY
EVD-X	23177-9	24	36	400	T6	G6.35	50	C-6F	1 $\frac{3}{8}$	36.1	2 $\frac{3}{4}$	60.0	16,625	3400	BDTH
EYB	23257-9	24	82	360	T5	G5.3	75	CC-8	1 $\frac{1}{4}$	31	2 $\frac{1}{4}$	57.0	10,000	3250	BDTH
FCR	26101-6	100	12	100	T3.5	GY6.35	50	C-6F	1 $\frac{3}{8}$	30	1 $\frac{3}{4}$	44.0	3400	3400	BDTH
FCS	20607-8	200	24	150	T4	G6.35	50	C-6F	1 $\frac{3}{8}$	30	2	51.0	5200	3400	BDTH
FCS-X	23174-6	100	24	150	T4	G6.35	50	C-6F	1 $\frac{3}{8}$	30	2	51.0	6000	3400	BDTH
FLW	20492-5	24	24	300	T6	GY6.35	50	C-6F	1 $\frac{3}{8}$	33	2 $\frac{1}{2}$	55.0	10,450	3400	BD±15°
JCR	24923-5	24	15	150	MR16	GZ6.35	500	C-8	—	—	1 $\frac{3}{4}$	42.0	—	—	BDTH
5761	25713-9	100	6	30	T3.5	G4	100	C-6F	$\frac{7}{8}$	19.6	1 $\frac{1}{2}$	31.0	765	3200	ANY
6605	25684-2	100	6	10	T3	G4	2000	C-6	$\frac{7}{8}$	19.5	1 $\frac{1}{2}$	30.0	150	2700	ANY
13117	37614-5	50	17	150	MR16	GX5.3	1000	CC-6	—	—	1 $\frac{3}{4}$	47.0	—	3200	ANY
13165	44295-4	50	14	35	MR11	GZ4	50	—	—	—	1 $\frac{1}{2}$	38.0	—	3400	BD±130°
13298	16094-5	50	10	52	MR11	GZ4	20	CC-8	—	—	1 $\frac{3}{4}$	45.0	—	3400	HORIZ.±40°
13528	31504-4	360	6	15	MR11	GZ4	500	C-6	—	—	1 $\frac{1}{2}$	38.0	—	2900	BD±105°
13865	26423-4	50	12	75	MR11	G5.3	50	—	—	—	1 $\frac{3}{4}$	40.0	—	3400	BD±105°
14552	16110-9	50	12	75	MR11	GZ4	50	—	—	—	1 $\frac{3}{4}$	41.0	—	—	BD±105°
14623	15881-6	100	17	95	T4	GY6.35	2000	C-8	—	—	2	50.0	2150	3000	ANY
6834/25H FO	30079-8	50	12	100	R50	GZ6.35	2,500	—	—	—	1 $\frac{3}{4}$	42	—	3400	ANY

* Rated Average Life is the length of operation (in hours) at which point 50% of a large sample of lamps will still be operational and 50% will not.

For the most current product information, go to the e-catalog on www.philips.com




Specialty Lamps

Stage/Studio/TV Lamps

ANSI Code	Product Number	Watts	Description	Volts	Base	MOL (In.)	LCL (In.)	Mean Lumens	Rated Avg. Life (Hrs.)*	Filament	Color Temp (K)	Envelope Finish
BTL	31891-5	500	6800C	120	P28s	4½	2¾	11,000	500	C-13D	3050	Clear
BTN	20481-8	750	7001C	120	P28s	4½	2¾	17,600	500	C-13D	3050	Clear
CYV	31892-3	1000	6995Y	120	G38	7¾	5	28,500	200	C-13D	3200	Clear
CYX	31893-1	2000	6994Z	120	G38	8½	5	59,000	300	C-13D	3200	Clear
EGT	31896-4	1000	6995Z	120	G22	5½	2½	28,500	250	C-13D	3200	Clear
FEL	26979-5	1000	6983P	120	G9.5	4	2¾	27,500	300	CC-8	3200	Clear
FRK	14952-6	650	6638P	120	GY9.5	1¾		17,500	200	C-13D	3200	Clear
GKV	36372-1	600	6986P	230	G9.5	4½	2¾	15,000	400	C-13D	3200	Clear
GKV	27287-2	600	6986P	240	G9.5	3¾	2¾	15,000	300	Bi-Plane	3200	Clear
GLA	29432-2	575	6992P	115	G9.5	4	2¾	13,000	1500	C-13D	3100	Clear
GLB	36373-9	575	6991P	230	G9.5	4	2¾	13,000	1500	C-13D	3100	Clear
GLB	27289-8	600	6991P	240	G9.5	4	2¾	13,000	1500	Bi-Plane	3100	Clear
GLC	28739-1	575	6989P	115	G9.5	4	2¾	15,500	400	C-13D	3200	Clear
GLD	13420-5	750	6981P	115	G9.5	4	2¾	20,500	300	C-13D	3200	Clear
6980Z	38296-0	1200	6980Z	80	G22	5½	2½	37,500	200	C-13D	3250	Clear
7002Y	38297-8	1000	7002Y 115V	115	G22	6	2½	29,000	250	Bi-Plane	3200	Clear
7015 TXO	15179-5	750	7015 TXO	100	GX9.5	3¾	1¾	18,600	300	C-13	3200	Clear

* Rated Average Life is the length of operation (in hours) at which point 50% of a large sample of lamps will still be operational and 50% will not

For the most current product information, go to the e-catalog on www.philips.com

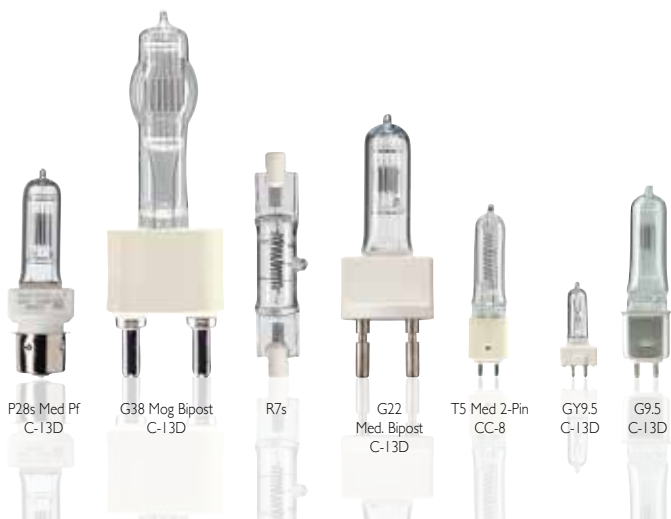

Specialty Lamps

High Volt SSTV Halogen Lamps


ANSI Code	Product Number	Watts	Description	Volts	Base	MOL (In.)	LCL (In.)	Mean Lumens	Rated Avg. Life (Hrs.)*	Filament	Color Temp (K)	Burning Position	Pkg. Qty.	Monoplane Equiv. LIF	LIF
-----------	----------------	-------	-------------	-------	------	-----------	-----------	-------------	-------------------------	----------	----------------	------------------	-----------	----------------------	-----

High Volt SSTV Halogen Lamps Single-Ended

FSL	25813-7	300	6872P	230	GY9.5	3 1/2	1 1/2	7800	180	M	3200	ANY	10	CP/81	
GCV/GVH	25796-4	500	6820P	230	GY9.5	3 1/2	1 1/2	11,000	360	Bi-Plane	3000	BDTH	10	T/25	T/18
FRH	25806-1	500	6873P	230	GY9.5	3 1/2	1 1/2	13,500	180	M	3200	ANY	10	CP/82	
7389	14104-4	500	7389	230	GY9.5	3	1 1/2	14,000	75	Bi-Plane	3200	BDTH	10	A1/224	
GKV	36372-1	600	6986P	230	G9.5	4	2 1/2	15,000	300	Bi-Plane	3200	ANY	10		
6998P	14103-6	650	6998P	230	GX9.5	4 1/2	2 1/2	13,000	750	Bi-Plane	3000	ANY	10	T 21	
GCK/GCT	25794-9	650	6823P	230	GY9.5	3 1/2	1 1/2	14,500	600	Bi-Plane	3050	BDTH	10	T/27	T/26
FKH	25820-2	650	6993Z	230	G22	5 1/2	2 1/2	16,500	120	Bi-Plane	3200	BDTH	10	CP/68	CP/39
6982P	13421-3	800	6982P	230	G9.5	4 1/2	2 1/2	20,000	200	Bi-Plane	3200	ANY	10		
6982P	27284-9	800	6982P	240	G9.5	4	2 1/2	20,000	200	Bi-Plane	3200	ANY	10		
FEP	14107-7	1000	6983P	230	G9.5	4	2 1/2	26,000	250	Bi-Plane	3200	ANY	10	CP/77	
FVA	14108-5	1000	6995P	230	GX9.5	4 1/2	2 1/2	25,000	240	Bi-Plane	3200	BDTH	10	CP/70	CP/24
FKD	25803-8	1000	6996C	230	P28s	5	2 1/2	21,000	900	Bi-Plane	3050	BDTH	10	T/20	T/14
7002Y	13041-9	1000	7002Y	230	G22	5 1/2	2 1/2	29,000	250	Bi-Plane	3200	ANY	10		
FKJ	14247-1	1000	6995Z	230	G22	5 1/2	2 1/2	25,000	240	Bi-Plane	3200	ANY	10	T/20	
FWP	25804-6	1000	6996P	230	GX9.5	4	2 1/2	21,000	900	Bi-Plane	3050	ANY	10	T/19	
FWR	27336-7	1000	6996P	240	GX9.5	4	2 1/2	21,000	900	Bi-Plane	3050	ANY	10	T/19	
FWS	14105-1	1200	6897P	230	GX9.5	4 1/2	2 1/2	27,600	400	Bi-Plane	3000	ANY	10	T/29	
FWT	27275-7	1,200	6897P	240	GX9.5	4 3/4	2 5/8	27,600	480	Bi-Plane	3000	ANY	10		T/29
6800C	27250-0	500	6800C	240	P28s	5 1/2	2 1/2	9500	900	Bi-Plane	2950	ANY	10	T/24	T/17
6963Z	29093-2	5000	6963Z	230	G38	11	6 1/2	132,500	400	Bi-Plane	3200	ANY	1	CP/85	CP/29
6963Z	27280-7	5,000	6963Z	240	G38	11	6 1/2	132,500	420	Bi-Plane	3200	ANY	1	CP/85	CP/29
7009Z	22399-0	1200	7009Z	80	G22	6	7 1/2	36,000	200	Bi-Plane	3250	BDTH	10	—	—
6984P	27286-4	1000	6984P	230	GX9.5	4 1/2	2 1/2	22,500	180	Bi-Plane	3200		10	CP/63	
6895P	27223-7	1200	6895P	230	GX9.5	4 1/2	2 1/2	30,000	240	Bi-Plane	3200		10	CP/90	
FVC	27290-6	650	6993P	230	GX9.5	4 1/2	2 1/2	16,500	120	Bi-Plane	3200		10	CP/67	CP/23
FTM	27293-0	2000	6994P	230	GY16	5 1/2	2 1/2	50,000	450	Bi-Plane	3200		10	CP/72	CP/43
FKK/FKP	27301-1	2000	6994Z	230	G38	8 1/2	5	50,000	480	Bi-Plane	3200		10	CP/73	CP/41
6994Y	27297-1	2000	6994Y	230	G22	6 1/2	3	50,000	480	Bi-Plane	3200		10	CP/75	CP/55
FRL	27245-0	650	6638P	230	GY9.5	3 1/2	1 1/2	16,500	180	Bi-Plane	3200	ANY	10	CP/89	
FRM	27246-8	650	6638P	240	GY9.5	3 1/2	1 1/2	16,500	180	Bi-Plane	3200	ANY	10	CP/89	
FEP	27285-6	1000	6983P	240	G9.5	4 1/2	2 1/2	26,000	180		3200	ANY	10	CP/77	
FVB	27307-8	1000	6995P	240	GX9.5	4 1/2	2 1/2	25,000	240	Bi-Plane	3200	ANY	10	CP/70	CP/24
FKJ	27333-4	1000	6995Z	240	G22	5 1/2	2 1/2	25,000	240	Bi-Plane	3200	ANY	10	CP/71	CP/40
FTL	27294-8	2000	6994P	240	GY16	5 1/2	2 1/2	50,000	450	Bi-Plane	3200		10	CP/72	CP/43
GAB	27303-7	1000	6995I/BP	230	GY9.5	3 1/2	1 1/2	25,000	250	Bi-Plane	3200		10		
GCV/GCJ	27254-2	500	3820P	240	GY9.5	3 1/2	1 1/2	11,000	360	Bi-Plane	3000	ANY	10	T/25	T/18
FSK	16668-6	300	6872P	240	GY9.5	3 1/2	1 1/2	7050	150		3200	ANY	10	CP/81	
FRJ	27261-7	500	6873P	240	GY9.5	3 1/2	1 1/2	13,500	150		3200	ANY	10	CP/82	
6874P	27263-3	300	6874P	240	GY9.5	3 1/2	1 1/2	5100	2000		2950	ANY	10	M/38	
6877P	27266-6	500	6877P	240	GY9.5	3 1/2	1 1/2	10,000	2000		2950	ANY	10	M/40	

* Rated Average Life is the length of operation (in hours) at which point 50% of a large sample of lamps will still be operational and 50% will not

For the most current product information, go to the e-catalog on www.philips.com

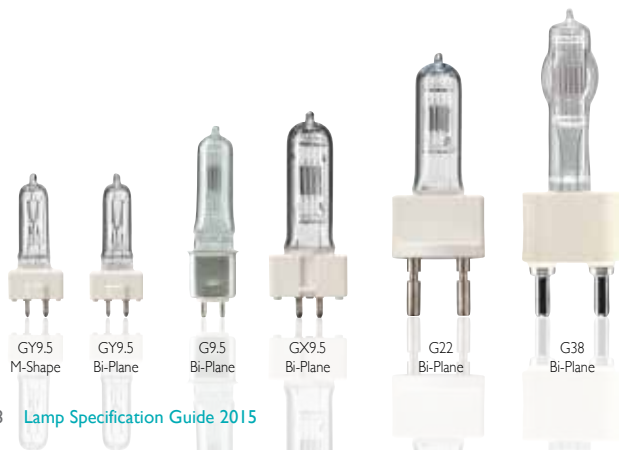

Specialty Lamps

High Volt SSTV Halogen and HPL SSTV Lamps

ANSI Code	Product Number	Watts	Description	Volts	Base	MOL (In.)	LCL (In.)	Mean Lumens	Rated Avg. Life (Hrs.)*	Filament	Color Temp (K)	Burning Position	Pkg. Qty.	Monoplane Equiv. LIF	LIF
-----------	----------------	-------	-------------	-------	------	-----------	-----------	-------------	-------------------------	----------	----------------	------------------	-----------	----------------------	-----

High Volt SSTV Halogen Lamps Continued

Single-Ended

6975Z	27281-5	2000	6975Z	240	G22	6%	3½	50,000	400	Bi-Plane	3200		10	CP/92	
GAD	27304-5	1000	6995I/BP	240	GY9.5	3%	1%	25,000	250	Bi-Plane	3200		10		
7002Y	15620-8	1000	7002Y	240	G22	5½	2½	29,000	250	Bi-Plane	3200	ANY	10	TI9	
FKK/FKP	27302-9	2000	6994Z	240	G38	8%	5	50,000	480	Bi-Plane	3200		10	CP/73	CP/41
VL300	29180-7	300	VL300	230	GX6.35	2 1/4	1 1/4	8,550	20	M	3200	ANY	20		

ANSI Code	Product Number	Watts	Description	Volts	Base	MOL (In.)	LCL (In.)	Mean Lumens	Rated Avg. Life (Hrs.)*	Filament	Color Temp (K)	Envelope Finish
-----------	----------------	-------	-------------	-------	------	-----------	-----------	-------------	-------------------------	----------	----------------	-----------------

HPL SSTV Lamps

HPL

HPL 575 115V	39170-6	575	7007	115	Heat Sink	4	2½	16,520	300	Bi-Plane	3250	Clear
HPL 575 230V	14564-9	575	7007	230	Heat Sink	4	2½	14,900	400	Bi-Plane	3200	Clear
HPL 575 240V	27343-3	575	7007	240	Heat Sink	4	2½	14,900	400	Bi-Plane	3200	Clear
HPL 575LL 115V	39167-2	575	7007 LL	115	Heat Sink	4	2½	12,360	2000	Bi-Plane	3050	Clear
HPL 575LL 230V	14565-6	575	7007 LL	230	Heat Sink	4	2½	11,760	1500	Bi-Plane	3050	Clear
HPL 575LL 240V	27345-8	575	7007 LL	240	Heat Sink	4	2½	11,760	1500	Bi-Plane	3050	Clear
HPL 750 115V	39171-4	750	7008	115	Heat Sink	4	2½	21,900	300	Bi-Plane	3250	Clear
HPL 750 230V	14566-4	750	7008	230	Heat Sink	4	2½	19,750	300	Bi-Plane	3200	Clear
HPL 750 240V	27346-6	750	7008	240	Heat Sink	4	2½	19,750	300	Bi-Plane	3200	Clear

ANSI Code	Product Number	Watts	Description	Volts	Base	MOL (In.)	LL (In.)	LCL (In.)	Mean Lumens	Rated Avg. Life (Hrs.)*	Filament (2)	Color Temp (K)	Burning Position	Pkg. Qty.	Monoplane Equiv. LIF	LIF
-----------	----------------	-------	-------------	-------	------	-----------	----------	-----------	-------------	-------------------------	--------------	----------------	------------------	-----------	----------------------	-----

Double-Ended

EME ⁽¹⁾⁽²⁾	31349-4	800	13477 R	230	R7s	4%	2½	—	23,600	150	C-8	3200	HORIZ. ±15°	10	P2/11	
EME ⁽¹⁾⁽²⁾	27231-0	800	13477R	240	R7s	4%	2½	—	24,400	150	Single Coil	3200	p15	10	P 2/11	
7786R	27072-8	1000	7786R	230	R7s	4%	2½	—	30,000	300	C-8	3200	HORIZ. ±15°			
7786R	27355-7	1000	7786R	240	R7s	4%	2½	—	30,000	300	Single Coil	3200	p15	10	P 2/20	
EKM ⁽¹⁾⁽²⁾	29089-0	1000	13989R	230	R7s	7%	—	—	26,000	200	Single Coil	3200	ANY	10	P 2/7	
EKM ⁽¹⁾⁽²⁾	27237-7	1000	13989R	240	R7s	7%	—	—	26,000	200	Single Coil	3200	ANY	10	P 2/7	
6358R	27493-6	1250	6358R	230	R7s				33,750	200	Single Coil	3200	p15	10	P 2/12	
6358R	27243-5	1250	6358R	240	R7s				33,750	200	Single Coil	3200	p15	10	P 2/12	
FDG	27363-1	1000	PF801 R	230	R7s				34,000	15		3400	ANY	10	P 1/12	

1) These lamp types must be operated with a separate rapid acting High Breaking-Capacity fuse, either 415V AC or 500V DC working in accordance with the supply in use as per end of table.

2) C.C.=coiled coil, S.C.=single coil

* Rated Average Life is the length of operation (in hours) at which point 50% of a large sample of lamps will still be operational and 50% will not

For the most current product information, go to the e-catalog on www.philips.com



Specialty Lamps

MSR Lamps

Description	Product Number	Watts	Volts	Lamp Current (Amps)	Initial Lumens	Rated Avg. Life (Hrs.)*	Arc Length (mm)	CRI	Color Temp (K)	Base
-------------	----------------	-------	-------	---------------------	----------------	-------------------------	-----------------	-----	----------------	------

MSR Lamps Single-Ended Gas Discharge

Hot Restrike^(1,2)

MSR 125 HR	26135-4	125	80	1.90	9400	200	4	92	6000	GZX9.5
MSR 200 HR	26136-2	200	70	3.30	15,000	200	5	92	6000	GZY9.5
MSR 250 HR	26137-0	250	96	2.60	20,000	750	5	90	6000	GZY9.5
MSR 400 HR	28726-8	400	70	6.90	32,000	1000	6	92	6000	GZZ9.5
MSR 575 HR	28727-6	575	95	6.95	49,000	1000	7	90	6000	G22
MSR 1200 HR	24582-9	1200	100	13.80	110,000	1000	10	95	6000	G38
MSR 2500 HR	24581-1	2500	115	25.60	240,000	500	14	95	6000	G38
MSR 4000 HR	24589-4	4000	200	27.50	380,000	500	20	91	6000	G38
MSR 6000 HR	36042-0	6000	125	55.00	570,000	300	24	95	6000	GY38
MSR 12,000 HR	39071-6	12,000	160	84.00	1,200,000	300	30	95	6000	GY38
MSR 18,000 HR	21823-0	18,000	225	77.60	1,650,000	300	35	90	6000	GX51

Standard⁽¹⁾

MSR 400	26138-8	400	70	6.90	32,000	1000	6	95	5900	GX9.5
MSR 575/2 10H	28707-8	575	95	6.95	49,000	1000	7	70	7200	GX9.5
MSR 700	24542-3	700	72	12.00	55,000	1000	7	75	5900	G22
MSR 700/2	24543-1	700	72	11.00	55,000	1000	8	80	7200	G22
MSR 1200	24551-4	1200	100	13.80	110,000	800	10	80	5900	G22
MSR 1200/2	24556-3	1200	90	13.80	110,000	800	10	85	7200	G22

Short Arc⁽¹⁾

MSR 400 SA	24500-1	400	54	8.40	30,000	750	3	75	5600	GY9.5
MSR 700 SA	28712-8	700	72	11.00	55,000	750	4	80	5600	GY9.5
MSR 1200 SA	28687-2	1200	100	13.80	96,000	750	7	80	6000	GY22
MSR 1200 SA/SE Gold	24576-1	1200	93	15.00	93,000	750	7	80	6000	PGJ41
MSR 2000 SA	24541-5	1800	110	21.50	174,000	750	7	89	6000	GY22

MSR Lamps Double-Ended Gas Discharge ⁽¹⁾

MSR 1800 DE	22058-2	1800		20.00	145,000	750	10	85	6000	SFC 1.5-6
-------------	---------	------	--	-------	---------	-----	----	----	------	-----------

1) Based on cycle 3.5 hours on/0.5 hour off, nominal wattage. Shorter life at short cycle operation.

2) Lamps must be used in fixtures designed for hot restrike.

* Rated Average Life is the length of operation (in hours) at which point 50% of a large sample of lamps will still be operational and 50% will not

For the most current product information, go to the e-catalog on www.philips.com



Description	Product Number	Watts	Volts	Lamp Current (Amps)	Initial Lumens	Rated Avg. Life (Hrs.)*	Arc Length (mm.)	CRI	Color Temp (K)	Base	MOL (mm)
-------------	----------------	-------	-------	---------------------	----------------	-------------------------	------------------	-----	----------------	------	----------

MSR SA/DE Gold (Double-Ended) Lamps

MSR Gold 575 SA/2 DE	24501-9	575	94	7.1	42,000	750	5	75	7500	SFC 11	92
MSR Gold 700 SA/2 DE	28713-6	700	70	11.5	56,000	750	4	75	7500	SFC 10-4	136
MSR Gold 1200 SA/DE	28714-4	1200	100	13.6	110,000	750	7	85	6000	SFC 10-4	136
MSR Gold 1200 SA/2 DE	28725-0	1200	207	13.6	103,000	750	7	85	7500	SFC 10-4	136
MSR Gold 1510 SA/DE	28716-9	1500	207	13.5	140,000	750	7	88	6000	SFC 10-4	136

MSD Lamps ⁽¹⁾

MSD 150/2	26139-6	150	96	1.85	10,500	3000	5	62	8500	G12	—
MSD 200	24511-8	200	70	3.40	13,500	2000	5	80	6000	GY9.5	—
MSD 250	26142-0	250	90	3.00	18,000	3000	5	75	6700	GY9.5	—
MSD 250/2 30H	28703-7	250	90	3.00	18,000	3000	5	70	8500	GY9.5	—
MSD 575	24519-1	575	95	6.95	43,000	3000	8	75	6000	GX9.5	—
MSD 575 HR ⁽²⁾	24547-2	575	95	6.95	46,000	2000	8	75	6000	G22	—
MSD 700	24553-0	700	72	11.00	50,500	3000	10	75	6000	G22	—
MSD 1200	24558-9	1200	115	13.80	92,000	3000	14	80	6000	G22	—

MSI Lamps

MSI 575 HR/2	21824-8	575	—	7.00	47,000	750	7	80	7800	SFC10-4	138
MSI 575 HR	39072-4	575	—	7.00	49,000	750	7	80	6000	SFC10-4	138

1) These lamp types must be operated with a separate rapid acting High Breaking-Capacity fuse, either 415V AC or 500V DC working in accordance with the supply in use as per end of table.

2) C.C.=coiled coil, S.C.=single

* Rated Average Life is the length of operation (in hours) at which point 50% of a large sample of lamps will still be operational and 50% will not

For the most current product information, go to the e-catalog on www.philips.com



Specialty Lamps

FastFit and Platinum Lamps

Description	Product Number	Watts	Volts	Lamp Current (Amps)	Initial Lumens	Rated Avg. Life (Hrs.)*	Arc Length (mm.)	CRI	Color Temp (K)	Base	MOL (mm)
FastFit Lamps											
Gas Discharge											
MSR Gold 300/2 Mini FastFit	28717-7	300	96	3.80	23,000	750	5.0	80	8300	PGJX28	126.0
MSD Gold 300/2 MiniFastFit	24538-1	300	96	3.80	21,000	2000	5.0	70	8600	PGJX28	126.0
MSR Gold 400 MiniFastFit	24896-3	400	55	7.20	26,000	750	3.0	60	6700	PGJX28	111.0
MSR Gold 575/2 Mini FastFit	28720-1	575	57	10.20	38,600	750	3.5	70	7500	PGJX28	112.0
MSR Gold 700/2 Mini FastFit	28692-2	700	69	10.20	47,000	750	5.0	75	7200	PGJX28	112.0
MSR Gold 700/1 MiniFastFit	29256-5	700	69	10.20	54,000	750	4	75	5600	PGJX28	112
MSR Gold 700 Mini FastFit	27709-5	700	69	10.80	50,000	750	4.0	73	6000	PGJX28	116.0
MSR Gold 1000 Mini FastFit	26047-1	1,000	88	11.1	83,000	750	5.5	81	6000	PGJX36	112.0
MSR Gold 700/2 FastFit	24562-1	700	72	10.20	50,000	750	4.0	75	7500	PGJX50	111.0
MSR Gold 1200 FastFit	28688-0	1200	207	15.00	95,000	750	5.0	80	6000	PGJX50	128.0
MSR Gold 1500 FastFit	28697-1	1500	198	15.30	120,000	750	6.0	80	6000	PGJX50	128.0
MSR Gold 1500/1 FastFit	26049-7	1,500	198	15.3	127,500	750	6	85	5700	PGJX50	128
MSR Gold 2000/2 FastFit	24560-5	2000	110	19.00	160,000	750	8.0	88	7500	PGJX50	134.0
MSR Gold 2000 SA FastFit	24573-8	2000	110	19.00	165,000	750	8.0	80	6000	PGJX50	134.0
MSR Gold 2500/2 FastFit	28701-1	2500	135	19.53	193,000	750	9.5	85	7200	PGJX50	153.0

Fast Fit Hi-Brite Halogen

Hi-Brite 750 FastFit	20161-6	750	80	9.50	22,500	300		100	3250	PGJX50	125.0
Hi-Brite 1200 FastFit	20162-4	1200	80	15.00	36,000	200		100	3250	PGJX50	140.0
7019G 750W PGJ X50	22907-0	750	115	6.52	20,500	300	9.5 x 9.0	100	3200	PGJX50	140.0
7018G 800W PGJ X50	22909-6	800	230	3.48	20,000	200	9.0 x 12.5	100	3200	PGJX50	140.0
7021G/LL 575W/115	27166-8	575	115	5.11	12,400	1500	9.0 x 9.5	100	3000	PGJX50	140.0

Platinum Lamps

MSD Platinum 2R	25652-9	132			5150	6000	1.2	75	8000		57.1
MSD Platinum 5R	24988-8	189			7950	3000	1.0	75	8000		57.1
MSD Platinum 14R	26150-3	280			12,000	2000	0.8	80	7800		57.1
MSD Platinum 15R	27608-9	300			13,500	2000	1.3	75	8000		66.4
MSD Platinum 16R	29305-0	330			16,000	1500	1.3	75	8000		66.4
MSD Platinum 17RA	25917-6	350			>20,000	1500	1	85	7000		63.0
MSD Platinum 20R	25918-4	470			>23,000	1500	1.2	80	8000		72.0
MSR Platinum 35	24597-7	800	67		57,800	1000	3.0	73	7750	PGJX36	116.0
MSR Platinum 35 ST	29315-9	800	74		57,800	750	3.0	80	6000	PGJX36	116.0

* Rated Average Life is the length of operation (in hours) at which point 50% of a large sample of lamps will still be operational and 50% will not

For the most current product information, go to the e-catalog on www.philips.com



Product Number	Watts	Description	Volts	Base	Diam. (In.)	Diam. (mm)	MOL (In.)	MOL (mm)	Lumens	Rated Avg. Life (Hrs.)*	Color Temp. (K)	Burning Position	Beam Shape
----------------	-------	-------------	-------	------	-------------	------------	-----------	----------	--------	-------------------------	-----------------	------------------	------------

Sealed Beam

27356-5	300	300PAR56/MFL	240	Mog. End	7	178	5	127		2000	3000	Universal	Med. Flood
27358-1	300	300PAR56/WFL	240	Mog. End	7	178	5	127		2000	3000	Universal	Wide Flood
27360-7	1000	1000PAR64/VNSP	240	Mog. End	8	204	6	150		300	3200	Universal	Very Narrow Spot
27361-5	1000	1000PAR64/NSP	240	Mog. End	8	204	6	150		300	3200	Universal	Narrow Spot
27362-3	1000	1000PAR64/MFL	240	Mog. End	8	204	6	150		300	3200	Universal	Med. Flood

Description	Product Number	Watts	Volts	Lamp Current (Amps)	Initial Lumens	Rated Avg. Life (Hrs.)*	Arc Length (mm)	CRI	Color Temp (K)	Base
-------------	----------------	-------	-------	---------------------	----------------	-------------------------	-----------------	-----	----------------	------

Ceramic ST Lamps

Ceramic ST 250HR	24517-5	250	100	2.6	23,000	4000	8	90	3200	GZY9.5
------------------	---------	-----	-----	-----	--------	------	---	----	------	--------

Product Number	Description	Technical Lamp Watts	Volts	Lumens	Base	LCL (In.)	MOL (In.)
----------------	-------------	----------------------	-------	--------	------	-----------	-----------

Short Arc Lamps

38278-8	CDM-SA/R 150W/942	152	96	2750	G12	2.2	4
36039-6	CDM-SA/T 150W/942	153	96	14,000	G12	2.2	4

Product Number	Description	Technical Lamp Watts	Current Amps	Bulb	Nom. Length (mm)	(In.)
----------------	-------------	----------------------	--------------	------	------------------	-------

Fluorescent Lamps with Super Actinic Radiation—Medium BiPin Base

30808-0	TL140W/03	142	1.46	T12	1514	60
---------	-----------	-----	------	-----	------	----

* Rated Average Life is the length of operation (in hours) at which point 50% of a large sample of lamps will still be operational and 50% will not.

For the most current product information, go to the e-catalog on www.philips.com



Specialty Lamps

UVA 365nm Peak Lamps

Product Number	Ordering Code	Technical Lamp Watts	Description	Nom. Length (In.)	Bulb	Base	Rated Avg. Life (Hrs.)*	UVA Watts
15765-1	PL-S 9W/10/2P (Lead Free)	8.6	UVA Lamp	6½	PL-S	G23	2000	
13034-4	PL-L 18W/10	18	UVA Lamp	9	PL-L	2G11	5000	3.5
23293-4	PL-L 36W/10/4P	36	UVA Lamp	16½	PL-L	2G11	2000	
28504-9	PL-L 36W/10/4P SECURA	36	UVA Lamp		PL-L		2000	
24675-1	TLK 40W/10R	40.5	UVA Reflector Lamp	24	T12	Med. Bipin	2000	
26169-3	TL 60W/10R	62	UVA Reflector Lamp	48	T12	Med. Bipin	1000	15.8
26885-4	TL 80W/10R	80	UVA Reflector Lamp	60	T12	Med. Bipin	1000	20.5
24694-2	TL 100W/10R	100	UVA Reflector Lamp	70	T12	Med. Bipin	1000	26.0
25895-4	Actinic BL 6W/10	6	UVA Lamp	9	T5	Min. Bipin	10,000	1.4
21513-7	Actinic BL 8W/10	7.1	UVA Lamp	12	T5	Min. Bipin	5000	
21517-8	Actinic BL 30W/10	30	UVA Lamp	18	T8	Med. Bipin	2000	6.6
39153-2	Actinic BL 40W/10	39	UVA Lamp	48	T12	Med. Bipin	9000	10.0
21518-6	Actinic BL 15W/10 SECURA	15	UVA Lamp	18	T8	G13	8000	3.2
13036-9	Actinic BL TL-D 15W/10	15	UVA Lamp	18	T8	Med. Bipin	8000	3.5
28670-8	Actinic BL TL-D 18W/10	18	UVA Lamp	24	T8	G13	13,000	5.0
25896-2	Actinic BL TL-D 30W/10	30	UVA Lamp	36	T8	G13	13,000	9.4
28671-6	MASTER Actinic BL TL-D 18W/10	18	UVA Lamp	24	T8	G13	13,000	5.1
28386-1	MASTER Actinic BL TL-D 15W/10	15.9	UVA Lamp	18	T8	G13	15,000	4.0
28578-3	MASTER Actinic BL TL-D 15W/10 Secura	15.5	UVA Lamp	18	T8	G13	15,000	3.15
28672-4	Actinic BL TL-DK 36W/10	36	UVA Lamp	24	T8	G13	9000	8.8

* Rated Average Life is the length of operation (in hours) at which point 50% of a large sample of lamps will still be operational and 50% will not

1) For graphic arts, lacquer curing and insect trap applications

For the most current product information, go to the e-catalog on www.philips.com



Product Number	Description	Technical Lamp Watts (1)	UV-C Watts (2),(4)	Bulb	Base	Rated Avg. Life (Hrs.)*	Nom. Length (In.)	Volts
----------------	-------------	--------------------------	--------------------	------	------	-------------------------	-------------------	-------

Germicidal Sterilamp 254nm Lamps

Hot Cathode

36371-3	TUV 4T5	4.0	0.9	T5 ⁽³⁾	Min. Bipin	6000	6	
24485-5	TUV 6T5	6.0	1.7	T5 ⁽³⁾	Min. Bipin	9000	9	
29930-5	TUV 8T5	8.0	2.4	T5 ⁽³⁾	Min. Bipin	11,000	12 ⁽³⁾	
30864-3	TUV 15T8	15.9	4.9	T8	Med. Bipin	9000	18 ⁽³⁾	
11250-8	TUV 16T5	15.0	4.0	T5 ⁽³⁾	Med. Bipin	11,000	12	
13340-5	TUV 17T8	16.7	4.5	T8	Med. Bipin	9000	24 ⁽³⁾	
29268-0	TUV 25T8	25.5	7.0	T8	Med. Bipin	9000	18 ⁽³⁾	
36016-4	TUV 30T8	30.0	12.0	T8	Med. Bipin	9000	36 ⁽³⁾	
26269-1	TUV 36W	36.0	15.0	T8	Med. Bipin	9000	48 ⁽³⁾	
37634-3	TUV 55W HO	54.0	17.5	T8	Med. Bipin	9000	36 ⁽³⁾	
29090-8	TUV 75W HO	75.0	25.5	T8	Med. Bipin	9000	48 ⁽³⁾	

Amalgam XPT Lamps

24262-8	TUV 130W XPT	140	46.0 ⁽⁵⁾	T6	4PSE	12,000	33.15	67
24261-0	TUV 180W XPT	180	61.0 ⁽⁵⁾	T6	4PSE	12,000	40.63	90
24260-2	TUV 200W XPT	200	66.0 ⁽⁵⁾	T6	4PSE	12,000	45.16	94
24258-6	TUV 325W XPT HO	305	115.0 ⁽⁵⁾	T6	4PSE	12,000	62.28	160

Amalgam XPT Lamp Driver

24266-9	TUV 130W XPT driver							
24264-4	TUV 200W XPT driver							
24263-6	TUV 325W XPT HO driver							

Amalgam Dynapower Lamps

21256-3	TUV 230W XPT	240	78.0	T8	4-Pin	16,000		
15792-5	TUV 260W XPT DIM	220	93.0	T10	4-Pin	16,000		
30066-5	TUV 260W XPT DIM HO	240		T10	4-Pin	16,000		
21258-9	TUV 335W XPT	230	80.0	T10	4-Pin	16,000		
30064-0	TUV 335W XPT SE HO	315		T10	4-Pin	16,000		
30062-4	TUV 335W WP XPT SE HO	315		T10	4-Pin	16,000		

Dynapower Driver

27885-3	Philips Dynapower							
---------	-------------------	--	--	--	--	--	--	--

* Rated Average Life is the length of operation (in hours) at which point 50% of a large sample of lamps will still be operational and 50% will not

1) Wattages shown are for operation from a transformer or ballast, currently standard, under specified test conditions

2) 100 Hour

3) Approximate overall length including two standard lamp holders.

4) UVC 100 Hour on HF gear

For the most current product information, go to the e-catalog on www.philips.com



T5 Hot Cathode Lamp
Min. Bipin

T8 Hot Cathode Lamp
Med. Bipin

T10 4-Pin Amalgam Lamp

TUV Amalgam XPT System

Specialty Lamps

Germicidal Sterilamp 254nm Lamps

Product Number	Description	Technical Lamp Watts (1)	UV-C Watts (2)(3)	Bulb	Base	Rated Avg. Life (Hrs.)*	Nom. Length (In.)	Volts
----------------	-------------	--------------------------	-------------------	------	------	-------------------------	-------------------	-------

Germicidal Sterilamp 254nm Lamps

Twin Tube PL-S / PL-L Hot Cathode

38186-3	PL-S 5W/TUV	5.5	1.0	PL-S	G23	9000	4	
32512-6	PL-S 9W/TUV	9.0	2.3	PL-S	G23	9000	6½	
21064-1	PL-L 18W/TUV	18.0	5.5	PL-L	2G11	9000	8⅝	
13726-5	PL-L 35W/TUV	35.0	11.0	PL-L	2G11	9000	8⅝	
26585-0	PL-L 36W/TUV	36.0	12.0	PL-L	2G11	9000	16⅞	
29464-5	PL-L 55W/TUV	55.0	17.0	PL-L	2G11	9000	22½	
13035-1	PL-L 60W/TUV	65.0	19.0	PL-L	2G11	9000	16⅞	
13725-7	PL-L 95W/TUV	90.0	27.0	PL-L	2G11	9000	22½	
28566-8	TUV PL-S 9W/4P	9.0	2.3	PL-S	2G7	9000	6⅜	
28565-0	TUV PL-S 11W/2P	11.0	3.2	PL-S	G23	9000	9⅞	
13502-0	TUV PL-S 13W/2P	13.0	3.4	PL-S	GX23	9000	7	
15127-1	TUV PL-L 24W/4P	24.0	7.1	PL-L	2G11	9000	12⅝	

* Rated Average Life is the length of operation (in hours) at which point 50% of a large sample of lamps will still be operational and 50% will not

1) Wattages shown are for operation from a transformer or ballast, currently standard, under specified test conditions

2) 100 Hour

3) UVC 100 Hour on HF gear

For the most current product information, go to the e-catalog on www.philips.com



PL-S Twin Tube
G23 Base

PL-L Hot Cathode
2G11 Base

Product Number	Description	Technical Lamp Watts (1)	UV-C Watts (2)(3)	Bulb	Base	Rated Avg. Life (Hrs.)*	Nom. Length (In.)
TUV T5							
38542-7	TUV 11W 4P SE	11	2.6	T5	4-Pin	9000	10
38541-9	TUV 16W 4P SE	15	4.0	T5	4-Pin	9000	13
23061-5	TUV 20W 4P SE	20	6.0	T5	4-Pin	11,000	17
13341-3	TUV 25W 4P SE	23	8.0	T5	4-Pin	9000	20
29267-2	TUV 36T5 SP	40 ⁽⁴⁾	15.0	T5	Single Pin	9000	34
36209-5	TUV 36T5 4P SE	40 ⁽⁴⁾	15.0	T5	4-Pin	9000	34
13389-2	TUV 36T5 HO 4P SE	75	25.0	T5	4-Pin	9000	34
29269-8	TUV 64T5 SP	75	31.0	T5	Single Pin	9000	62
38303-4	TUV 64T5 4P SE IS	75	31.0	T5	4-Pin	9000	62
36217-8	TUV 64T5 4P SE	75	31.0	T5	4-Pin	9000	62
39200-1	TUV 64T5 HO 4P SE	145	48.0	T5	4-Pin	9000	62

* Rated Average Life is the length of operation (in hours) at which point 50% of a large sample of lamps will still be operational and 50% will not

1) Wattages shown are for operation from a transformer or ballast, currently standard, under specified test conditions.

2) 100 Hour

3) UVC 100 Hour on HF gear

4) Wattage shown is for lamp operating current of 420 ma. Wattage will vary at other operating currents as follows: 120 ma. — 17 watts; 200 ma. — 25 watts; 300 ma. — 32 watts.

For the most current product information, go to the e-catalog on www.philips.com



Slimline T5
TUV
4-Pin

Slimline T5
TUV
Single Pin

Specialty Lamps

Base Types and Bulb Shapes


Base Types (Not Actual Sizes)



PG22-6.35
DIN: 4975 I
iec: 7004-48



RX7s
DIN: 49750
IEC: 7004-92
ANSI: Recessed
single contact base
C8.61-1990
sheet I-770-1



G5.3
IEC: 7004-73-2
ANSI: Miniature
2-pin
C81.61-1990
sheet I-20-1



BA 15s
DIN: 49720
IEC: 7004-1 IA
ANSI: Single contact
candelabra
bayonet base
C81.61-1990
sheet I-20-1



BA 15d
DIN: 49720
IEC: 7004-1 IA
ANSI: Candelabra
bayonet base
double contact
C81.61-1990
sheet I-20-1



B15d
DIN: 49721
IEC: 7004-1 I



B22d/22
IEC: 7004-10



G3.9
ANSI:
C81.61-1990
sheet I-300-1



G4
IEC: 7004-72



GX5.3
(Round pin)
IEC: 7004-73
ANSI:
C61.61-1990
sheet I-321-1




G6.35
GX6.35
GY6.35
IEC: 7004-59
ANSI: C81.61-1990
sheet I-340-1



GZ6.35
DIN: 49754
IEC: 7004-59A




GZ4
IEC: 7004-67





GX9.5
DIN: 49638
IEC: 7004-70A



GY9.5
IEC: 7004-70B
ANSI: C81.61-1990
sheet I-369-1




G22
IEC: 7004-75
ANSI: Medium
bipost
C81.61-1990
sheet I-466-1



G38
IEC: 7004-76
ANSI: Mogul
bipost
C81.61-1990
sheet I-519-1

Bulb Shapes (Not Actual Sizes)



T-2.5
T-3




T-3.5
T-4
T-4.5




T-5
T-6



G-7



MR-11
MR-13
MR-16




R7s




RX7s

Base Types and Bulb Shapes (Not Actual Sizes)


Double-Ended Tungsten Halogen lamps
 3 $\frac{1}{8}$ ", 3 $\frac{3}{8}$ ", 4 $\frac{1}{8}$ ", 4 $\frac{1}{4}$ ", 5" and 6" MOL
 R7 Base




Medium 2-Pin
 Tungsten Halogen Lamps (G9.5)




Medium Prefocus Lamps with 2 $\frac{3}{8}$ " L.C.L. (P28s)
 Medium Prefocus Lamps with 3 $\frac{1}{2}$ " L.C.L. (P28s)

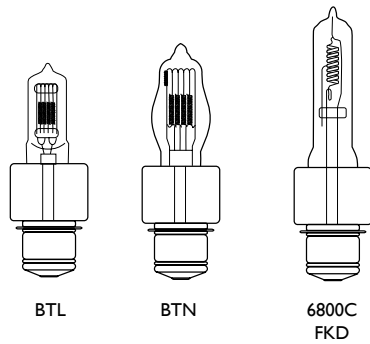


Medium Bipost Lamps with 2 $\frac{1}{2}$ " L.C.L. (G22)
 Medium Bipost Lamps with 5" and 6 $\frac{1}{2}$ " L.C.L.
 (G38)

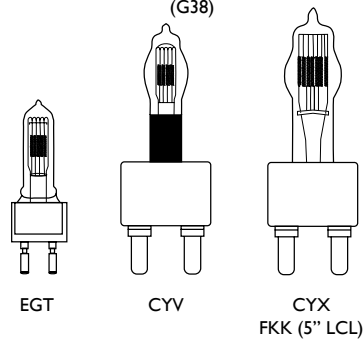


MSR Lamps
 (Medium Source Rare Earth Lamps)




MSR/HR Lamps (Medium Source Rare Earth
 Lamps Hot Restrike Version)




MSR Short
 Arc Lamps



MSD Lamps



MHD Lamps




MSR 400 MSR 700 MSR 1200

MSR 575/HR MSR 1200/HR MSR 2500/HR


MSR 400W SA

MSD 200W/2

MHD 1800



MSR 400 SA/MSR 700 SA



MSR 1200 SA/MSR 2000 SA


Specialty Lamps

Base Types and Bulb Shapes

Specialty Bulb Shapes (Not Actual Sizes)



T12 Medium Bipin



T8 Medium Bipin



T5 Miniature Bipin




Hot Cathode Sterilamp




Cold Cathode and Slimline Sterilamp



Slimline Sterilamp



PL-L




PL-S

XPT



Xtra



Accent Lighting

Concentrated light on a subject which highlights it and causes it to stand out from its surrounding. Depending on degree of drama desired, accent light should minimally be 10x the general light or ambient light.

Accommodation

The involuntary muscular process by which the eye changes focus from one distance to another.

Adaptation

The involuntary process by which the visual system changes its sensitivity, depending on the luminances prevailing in the visual field. The process involves both the iris and the light sensitive cells of the retina.

AllnGaP

The preferred LED (Light Emitting Diode) chip technology containing Aluminum, Indium, Gallium, and Phosphorous to produce red, orange and amber-colors.

ALTO Lamp Technology

Philips ALTO Lamp Technology is widely recognized as a leading low-mercury solution for fluorescent lighting. This technology uses capsule dosing to precisely control the amount of mercury in each ALTO lamp. Long-life ALTO lamps further reduce the need to replace lamps and, as a result, decrease the amount of mercury used over life of any lighting installation.

Ballast

The ballast is an electrical device that performs two basic functions: 1) provides the starting voltage and 2) limits the current to sustain lamp operation.

Ballast types for fluorescent lamps:

Instant Start: Instant start electronic ballasts are the most popular type of electronic ballast today because they provide maximum energy savings and they start lamps without delay or flashing. Since they do not provide lamp electrode heating, instant start ballasts consume less energy than comparable rapid start, program rapid start or programmed start ballasts. As a result, they provide the most energy efficient solution to fluorescent lamp ballasting. The instant start ballast uses 1.5 to 2 watts less energy per lamp than the rapid start alternative.

Instant-start electronic ballasts provide a high initial voltage (typically 600V for F32T8 lamps) to start the lamp. This high voltage is required to initiate discharge between the unheated electrodes of the lamp. However, the cold electrodes of lamps operated by an instant start ballast may deteriorate more quickly than the warmed electrodes of lamps operated by a rapid start, program rapid start or programmed start ballast. Lamps operated by instant start ballasts will typically withstand 10–15K switch cycles. Instant start ballasts are typically wired in *parallel*. This means that if one lamp fails, the other lamps in the circuit will remain lit.

Rapid Start: Rapid start ballasts have a separate set of windings which provide a low voltage (approx. 3.5 volts) to the electrodes for one second prior to lamp ignition. A starting voltage somewhat lower than that of instant ballast (typically 450–550V for F32T8 lamps) is applied, striking an electrical arc inside the lamp. Most rapid start electronic ballasts continue to heat

the electrode even after the lamp has started, which results in a power loss of 1.5 to 2 watts per lamp. Lamps operated by a rapid start electronic ballast will typically withstand 15–20K switch cycles. Rapid start ballasts are typically wired in *series*. This means that if one lamp fails, all other lamps in the circuit will extinguish.

Programmed Start: Programmed start (PS) electronic ballasts provide maximum lamp life in frequent starting conditions (up to 50,000 starts). PS ballasts use a custom integrated circuit (IC) which monitors lamp and ballast conditions to ensure optimal system lighting performance. Like Program rapid start ballasts, PS ballasts also precisely heat the lamp cathodes. However, PS ballasts heat the lamp cathodes to 700°C prior to lamp ignition. This puts the least amount of stress on the lamp electrodes, resulting in maximum lamp life regardless of the number of lamp starts. Programmed start ballasts are typically wired in *series*.

Ballast types for HID lamps:

Reactor: Single coil, very efficient, but poor voltage regulation to the lamp.

Constant Wattage Autotransformer (CWA): Employing two coils, the ballast is less efficient than reactor types, but have better voltage regulation. Most popular type in use.

Magnetically Regulated (Mag Reg) or Regulated

Lag (Reg Lag): Three coils make for very effective voltage regulation but also not very efficient.

Electronic: Allows for both high efficiency and the best voltage regulation.

Beam Angle

The beam angle defines the light pattern around the beam's central axis for which the luminous intensity is half that of the maximum luminous intensity.

Bin

In LEDs, the systematic dividing of distribution of performance parameters (Flux, Color or CCT, and Vf) in to smaller groups that meet aesthetic requirements of the assembly.

Binning

The separation of LEDs subsequent to a production run for full manufactured, distribution in terms of color, flux and forward voltage.

Candela (cd) (Luminous Intensity)

The intensity base unit for light. Intensity is the luminous flux emitted from a point per unit solid angle into a particular direction, regardless of distance.

Candlepower (cp)

Luminous intensity expressed in candelas.

Chip

A very small square of semi-conducting material. Also known as a die, it is the active light-emitting component of an LED.

Color Rendering Index (CRI)

A method for describing the effect of a light source on the color appearance of objects, compared to a reference source of the same color temperature (CCT). The highest CRI attainable is 100. Originally based on an eight standardized color comparisons, it was later extended to fourteen colors.

Additional Information

Glossary

Color Temperature or Correlated Color Temperature (CCT)

The color temperature of a light emitter refers to the temperature to which one would have to heat a “blackbody” source (Planckian radiator) to produce light of similar overall appearance or chromaticity. A low color temperature implies warmer color (more yellow/red) light while high color temperature implies a cooler light (more blue). The standard unit for color temperature measurement is expressed in Kelvin (K).

Die—Chip

heart of the LED

Diode

A two-electrode device with an anode and a cathode that passes current in only one direction. It may be designed as an electron tube or as a semiconductor device.

Driver

Electronics used to power illumination sources. Ballast.

Field Angle

The field angle defines the light pattern around the beam’s central axis for which the luminous intensity is 10% that of the maximum luminous intensity.

Footcandle

The unit of measure for the density of light on a surface unique to the USA. One footcandle is equal to one lumen per foot (lm/ft²). One footcandle = 10.674 lux.

General Lighting (Ambient Lighting)

Lighting designed to deliver a predominately uniform level of light throughout an area.

Glare

Glare is an interference with visual perception caused by an uncomfortably bright light source or reflection within one’s field of view; a form of visual noise. In its simplest form, glare (unwanted light) is a consequence of the human eye to adapt to different light levels. In the case of glare, the eye adapts to the high level of the glare source, which makes it difficult to perceive details in the now too dark work area.

Direct Glare: Glare resulting from high luminances in the visual environment that are directly visible from a viewers position; such as an insufficiently shielded luminaire.

Reflected Glare or Veiling Reflection: A reflection of incident light that partially or totally obscures the details to be seen on a surface by reducing the contrast.

Discomfort Glare: Glare which is distracting or uncomfortable (subjective), which interferes with the perception of visual information, but which does not significantly reduce visual performance.

Disability Glare: The effect of light which significantly reduces visual performance and perception; such as car high beams in your face on a dark country road.

Illuminance

The total density of visible light—from all directions —illuminating, falling on or incident to, a surface. Standard unit of measure for illuminance is LUX (lx) which is lumens per square meter (lm/m²). See [Footcandle](#).

InGaN

The preferred LED (Light Emitting Diode) semiconductor technology containing Indium, Gallium, and Nitrogen to produce green, blue and white-colored LED light sources.

Initial vs. Mean Lumens

The measured luminous output of a new light source versus the output at 40% of lamp life.

Inverse Square Law

This law says that the measured flux density from a light source decreases along any line from the source. It falls off in proportion to the square of the relative distance traversed. Thus the illuminance measurement 2 feet from the light source will be ¼ of the measurement 1 foot from the source—not ½.

Kelvin

The Kelvin unit is the basis of all temperature measurement. In lighting, Kelvin is the unit of measure for Color Temperature used to indicate the overall color of the light produced from a source. See [Color Temperature](#).

Kilowatt Hour (kWh)

The measure of electrical energy from which electricity billing is determined. For example, at the rate of \$0.11 per kWh, a 100 watt lamp operating for 2000 hours will cost \$22.00 (100×2000/1000 = 200 kWh × .11 = \$22.00)

LED Driver

See ‘Driver’

Light

Radiant energy that stimulates the sense of sight.

The “visible” part of the electromagnetic spectrum from 380–770 nm. Light is the energy which allows us to see.

Light Emitting Diode (LED)

A solid-state semiconductor device that converts electrical energy directly into light. On its most basic level, the semiconductor is comprised of two regions. The p-region contains positive electrical charges while the n-region contains negative electrical charges. When voltage is applied and current begins to flow, the electrons move across the n region into the p region. The process of an electron moving through the p-n junction releases energy. The dispersion of this energy produces photons with visible wavelengths.

Lumen (lm)

SI unit of luminous flux. Photometrically, it is the luminous flux emitted within a unit solid angle (1sr) by a point source having a uniform luminous intensity of 1 cd. —or— The SI unit for measuring the flux of light being produced by a light source or received by a surface.

Luminaire (light fixture)

A complete lighting unit which consists of lamp(s), ballast(s)—if applicable—as well as mechanism for light distribution, lamp protection and alignment and connection to power.

Luminaire Efficacy

The ratio of luminous flux emitted by the fixture to that emitted by the lamp(s) within the fixture. Expressed as a percentage.

Luminance (The physical measure of brightness)

Luminance is the amount of visible light leaving a point on a surface in a given direction. The light leaving the surface can be due to reflection, transmission and/or emission. Standard unit of luminance is candela per square meter (cd/m²).

Luminous Efficacy

The expression of efficiency in converting power (watts) into light (lumens). Expressed as lumens per watt or l/w.

Luminous Exitance

Refers to the total amount of visible light leaving a surface in all directions. Unit for luminous exitance is lumens per square meter (lm/m²)

Packaged LED

Consists of the die, a lead frame, which houses the die, the encapsulation epoxy that protectively surrounds the die, and also disperses the light.

Parallel (LED)

Electrical condition where LEDs operate under the same voltage being provided by a driver.

Photocell

A transducer used to detect and measure light and other radiations.

Photometry

Photometry is the science of measuring visible light in units that are weighted according to the sensitivity of the human eye known as the Visual Wavelength (Vλ) factor. Photometric theory does not address how we perceive colors.

Radiometry

Radiometry is the science of quantifying the phenomena of electromagnetic radiation. In our context, we are interested in light, the limited range of electromagnetic radiation that is visible to the human eye, sometimes extended to the areas of infrared and ultraviolet.

Rated Average Life

The length of operation (in hours) at which point an average of 50% of a large sample of lamps will still be operational and 50% will not.

Series (LED)

Electrical condition where LEDs operate under the same current being provided by a driver.

Task Lighting

Lighting designed for a specific visible operation which requires higher light levels; most often characterized by proximity to that task.

Transformer

An electrical device by which alternating current of one voltage is changed to another voltage

Voltage

A measure of electromotive force or simply said, the pressure of electricity. This is analogous to pressure in a water line. In this catalog, voltage refers to supply voltage required by the lamp (incandescent) or operating voltage required by the arc tube (discharge lamps).

Watt

Unit used to measure electric power consumed by a lamp or any electrical device.

Additional Information

Technical Descriptions

Lamp Listing Sequence

Lamps are listed in wattage sequence except for special groupings such as Street Lighting, Tungsten Halogen, High Intensity and Silicone Coated Lamps.

Ordering Code

The complete information shown in the ordering code column together with the voltage, if applicable, should be used when placing orders. In a number of instances a lamp type may be available in different kinds of packaging such as 2 or 4 lamp wrappers. Some small lamp types which are generally multiple packed on a platform with an overwrap are also packaged as a blister-carded item for the retail market. Each of these items is shown as a separate listing. To identify them, additional information is included with the ordering code. The following examples illustrate this:

Ordering Code	BC-7T7/W 12/2
Pkg. Qty.*	12cds
Explanation	Carded pack—2 lamps per card. The number shown under "Pkg. Qty" is the number of cards per min. shipping case.
Ordering Code	60T/SW 12/4
Pkg. Qty.	48
Explanation	12-4 lamp wrappers = 48 lamps per min. shipping case.
Ordering Code	50/150T/WL/TP 96/1
Pkg. Qty.	96
Explanation	96-1 lamp wrappers = 96 lamps per min. shipping case.

* Quantity shown is minimum shipping container. Refer to Net Price Schedule for number of lamps required for qualification as a standard case.

Voltage

Lamps listed are available only in the voltage shown. Lamps listed in range voltages such as 115–125 or 230–250 are intended for use on circuits normally varying within these voltage limits and are designed for an average voltage suitable for operation on such circuits. Lamps intended for operation in range voltages have a design volt center as follows, unless otherwise noted by a footnote:

Range Voltage	Design Voltage
115–125	120
120–125	120
120–130	125
125–130	130
230–250	240

Class of Lamp

Incandescent lamps are classified as type B or type C. The type B lamp is one in which the filament operates in a vacuum. The type C lamp is one in which the filament operates in an atmosphere of inert gas. For gas-filled lamps which can be operated in any position, the lumen maintenance is best when lamps are operated base up. For the vacuum type lamps which have no restrictions on operating position, the lumen maintenance is the same in all operating positions.

Lamp Dimensions

Bulb designations consist of a letter or letters to indicate shape and a number to indicate the approximate diameter in eighths of an inch.

Maximum Overall Length (MOL)

Maximum Overall Length is measured from the top of the bulb to bottom of the base.

Nominal Length

A measurement of fluorescent lamp length based on the length of the lamp plus the proper allowance for standard lamp holders.

Light Center Length (LCL)

Light Center Length is the distance from a reference point on a lamp base (usually the eyelet) to the center of the light source. For high intensity discharge lamps, it is the distance from the center of the filament or center of the arc to the point shown below for the base indicated.

All Screw Bases: Bottom base contact

Medium and Mogul Prefocus: Top of base pin

Medium Bipost: Bottom of bulb

Bayonet Candelabra and Medium Bayonet: Top of base pins

SC or DC Prefocus: Plane of locating bosses of prefocusing collar

Mini-Can: Intersection of 45° taper with max. diameter of base

Inches to Metric Conversion

To calculate the metric equivalent of inches in millimeters (mm) use the following formula:
inches x 25.4001 = millimeters

Operating Position

Lamps may be operated in any position unless otherwise indicated.

Base Pin Position for Bayonet Candelabra-Based Lamps

When lamps are based with a bayonet candelabra base, the plane of the base pins will be approximately at right angles to the plane of the filament, unless otherwise indicated.

SC or DC Prefocus Based Lamps

The plane containing the base axis and the major locking eyelet, which is the eyelet equidistant from the two other eyelets, will be at right angles to the plane of the filament or lead wires unless otherwise indicated. The letter (A) shown in the Base column after SC or DC Pref. based lamps indicates that the distance from the bottom of base contact or contacts to the bottom of the collar is .406". In the case of DC Pref. based lamps, the letter (A) also indicates that the plane containing the base axis and contacts is at right angles to the plane containing the base axis and the major locking eyelet.

Additional Information


Measuring Lamps and Understanding Ordering Codes

Measuring Incandescent, Halogen, CFL and HID Lamps


Letters designate the shape of the glass bulb and numbers indicate the diameter of the bulb in eighths of an inch.

For example:


“A19” indicates a standard bulb having a diameter of 1⁹/₈ or 2 ³/₈ inches.



“T10” indicates a tubular shaped having a diameter of 1⁰/₈ or 1 1/4 inches.



“MR16” indicates mini reflector having a diameter of 1⁶/₈ or 2 inches.




“ED37” indicates a large HID bulb having a diameter of 3⁷/₈ or 4 5/8 inches.




Measuring Fluorescent Lamps

To determine the length of a fluorescent lamp, you do not measure the bulb. The Nominal Length of the bulb is the measurement from back of socket to back of socket on the fixture.

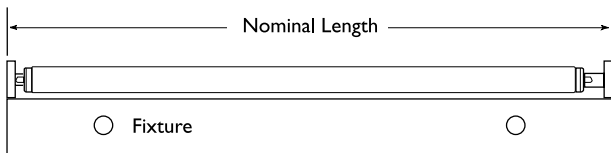

To determine the type of lamp you need, measure the endcap and use the illustration below as a guide.

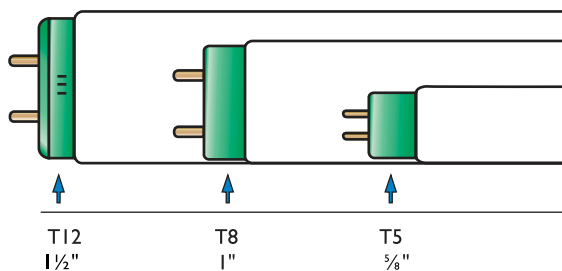

Understanding Ordering Codes

Typical ordering codes can be understood with the examples below:

Incandescent ordering code: BC15BA9C/CL/LL

- BC = Blister Carded Package
- 15 = Lamp Wattage
- BA9 = Lamp Type
- C = Candelabra Base (Blank = Medium)
- CL = Clear (W = White, etc.)
- LL = Long Life (Blank = Standard)

Halogen ordering code: 45PAR38/HAL/SP10

- 45 = Lamp Wattage
- PAR38 = Lamp Type
- Hal = Halogen
- SP = Spot Lamp
- 10 = Beam Spread in Degrees

CFL ordering code: PL-C 13W/827/4P/ALTO

- PL-C = Lamp Type
- 13W = Lamp Wattage
- 827 = Lamp Color
- 4P = Base has 4-Pins
- ALTO = Low Mercury Content

Fluorescent ordering code: F32T8/ADV841/ALTO

- F = Fluorescent
- 32 = Nominal Lamp Wattage
- T8 = 1" Diameter Tube
- ADV = Advantage
- 841 = CRI of 80+ and Color Temp. of 4100K
- ALTO = Low Mercury Content

HID ordering code: MS320/C/U/PS

- MS = High Output Arc Tube
- 320 = Lamp Wattage
- C = Coated
- U = Universal Burning Position
- PS = Pulse Start



© 2015 Koninklijke Philips N.V. All rights reserved. Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

SG-100 07/15 philips.com

Philips Lighting
North America Corporation
200 Franklin Square Drive
Somerset, NJ 08873
Tel. 855-486-2216

Imported by: Philips Lighting
A division of Philips Electronics Ltd.
281 Hillmount Rd,
Markham, ON, Canada L6C 2S3
Tel. 800-668-9008