
2 Circuit set-up

Before operating Trilogy 100, you need to configure the circuit type.

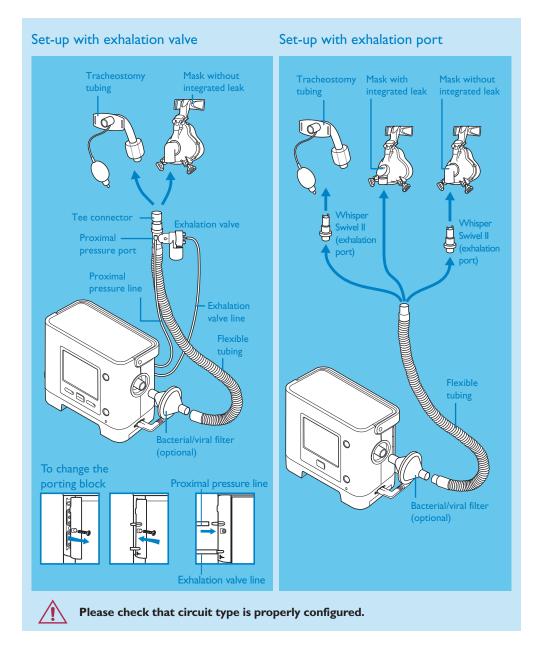

How to reach us

Respironics 1001 Murry Ridge Lane Murrysville, PA 15668

Customer Service 724 387 4000 800 345 6443 (toll free)

Respironics, Trilogy, Whisper Swivel, and Alice are trademarks of Respironics, Inc. and its affiliates.

© 2009 Respironics Inc. All Rights Reserved.

Respironics reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

1062062 JH 4/3/09

Trilogy 100




Quick start guide

- 1 Overview
- 2 Circuit set-up
- 3 Set-up screen
- 4 Prescription set-up




1 Overview

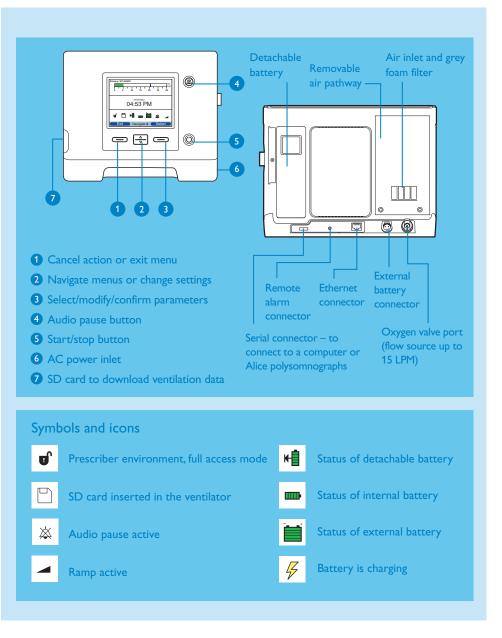


Set-up screen

Setting the Active or Passive circuit

Make sure Trilogy100 is turned off before taking the following steps




Press and hold and for a few seconds to access **Set-up** page



Navigate to **Circuit Type** and press Modify



Select Settings And Alarms



Use to choose **Active PAP** (exhalation valve set-up) or **Passive** (exhalation port set-up) and then press OK twice to confirm

Setting menu access


To enable full access to the settings




Navigate to **Options** and press Select




Press Modify to enter Menu Access



Use to choose Full or Limited Access and press OK to confirm




Press Finish and Exit to return to Initial Screen



Press to begin therapy or continue navigating through the menu to set-up the ventilation parameters

Prescription set-up



From main screen, press **Menu**




Use $\frac{\triangle}{\nabla}$ to change the value or status of setting




Dual Prescription

If **Dual Prescription is** enabled, both prescriptions Two prescriptions to set need to be adjusted as previously explained



Select Settings And Alarms



RR ZUBPM Vte 435ml Peak Flow 07.9l/min PIP $\mathbf{5.9}^{cm}_{H_2O}$ Leak $\mathbf{21}$ l/min MinVent $\mathbf{8.7}$ l/min

Exit Navigate \$ Select

Press OK to validate new setting


Switch to Secondary Settings Safely Remove SD Card

Primary Settings and Alarms


Secondary Settings and Alarm



Scroll up and down using $\frac{\Delta}{\forall}$ to navigate through the settings and alarms



Press Finish and Exit to return to the main screen



Press Modify to change the parameter highlighted in blue

