



HF-Selectalume II for TL-D lamps

HF-S 236 TL-D II 220-240V 50/60Hz

HF-Selectalume II TL-D is the most cost-effective, reliable and outstanding solution for fluorescent lamps. These ballasts are part of an overall high-efficiency lighting system that may help you or your customers to achieve any international or local energy code you need to comply with. HF-Selectalume II TL-D ballasts are the ideal choice for a broad range of new construction and retrofit applications within the commercial sector, including general surface mounting or office lighting, parking garages, warehouses, waterproof and other applications.

Product data

• General Characteristics

Application code	II
Rated Lamptype	TL-D
Rated Number of Lamps	2 piece
Rated Ballast-Lamp Power	36
Line Voltage	220-240 V
Line Frequency	50/60 Hz
Housing	L 280x30x28
Energy Efficiency Index	A2 BAT
Lifetime 90% surv.@Tcaselife	50000 hr

• Operating Characteristics

Automatic restart	Yes
Preheat time	1.6 s
Operating frequency *	45 kHz
Mains voltage safety (AC)	198-264V -10%/+10%
Mains voltage performance (AC)	202-254V -8%/+6%
Inrush current Peak	18 (max) A
Inrush current Width	0.35 ms
Earth leakage current	0.5 (max) mA
Power losses gear	4.6 W
Ballast Lumen Factor	1.01 -
PowerFactor 100% output power	0.98 -
Overvoltage protection 320Vac	48 hr
Overvoltage protection 350Vac	2 hr

Max ballast on MCB(16A type B)	28 x
Crestfactor	1.7 -
Hum and Noise level	< 30 dB(A)

• Wiring Characteristics

Cable-Cap output-wires mutual	200 (max) pF
Conn.type input terminals	WAGO 744 connector
Conn.type output terminals	WAGO 744 connector [Suitable for manual wiring]
Max. cable length	0.75 m
Hot Wires	
Striplength	8.0-9.0 mm
Dual fixture Master/Slave	Possible, lamp wires 2m max. length [Master/Slave operation possible]
Wcs Input terminals	0.50-1.50 mm ²
Wcs Output terminals	0.50-1.50 mm ²
Cable-Cap hot out-wires-earth	200 (max) pF
Cable-Cap cold out-wires-earth	200 (max) pF

• System Chars on driver level

Rated Lamp Power on TL-D	36
System Power on TL-D	71.2
Lamp Power on TL-D	66.6
Power Loss on TL-D	4.6

PHILIPS

HF-Selectalume II for TL-D lamps

• Temperature Characteristics

F-marking	Yes
T-case life	75 C
T-case maximum	75 (max) C
T-ambient	-20 (min), 55 (max) C
T-storage	-40 (min), 80 (max) C

• Emergency Characteristics

Bal Lm Fac Emer- gency operation	0.7 -
Light output after 5 sec	50% of EBLF
Light output after 60 sec	100% of EBLF
Normal operating voltage (DC)	220-240 V
Batt volt guaranteed ignition	186-275 V
Batt volt guaranteed operation	176-275 V

• Product Dimensions

Length A1	280 mm
Fixing Hole Distance	265 mm
Length A2	
Width B1	30 mm
Height C1	28 mm
Fixing Hole Diameter	4.2 mm
D1	


• Approval & Application Chars

EMI 9kHz .. 30 MHz	EN 55015
Vibrations	IEC 68-2-6 Fc
Bumps	IEC 68-2-29 Eb (10G/16ms)
Approval marks	CE / CCC / ENEC / VDE-EMV
CE marking	Yes
ENEC certificate	Yes
C-Tick certificate	Yes
CCC certificate	Yes
PSB certification	Yes
TISI marking	Yes
SIRIM approval	Yes
CB Certificate	Yes

• Product Data

Order code	913713032466
Full product code	913713032466
Full product name	HF-S 236 TL-D II 220-240V 50/60Hz
Order product name	HF-S 236 TL-D II 220-240V 50/60Hz
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8711500999313
Bar code on outerbox - EAN3	8727900905533
Logistic code(s) - 12NC	913713032466
Net weight per piece	0.193 kg

Dimensional drawing

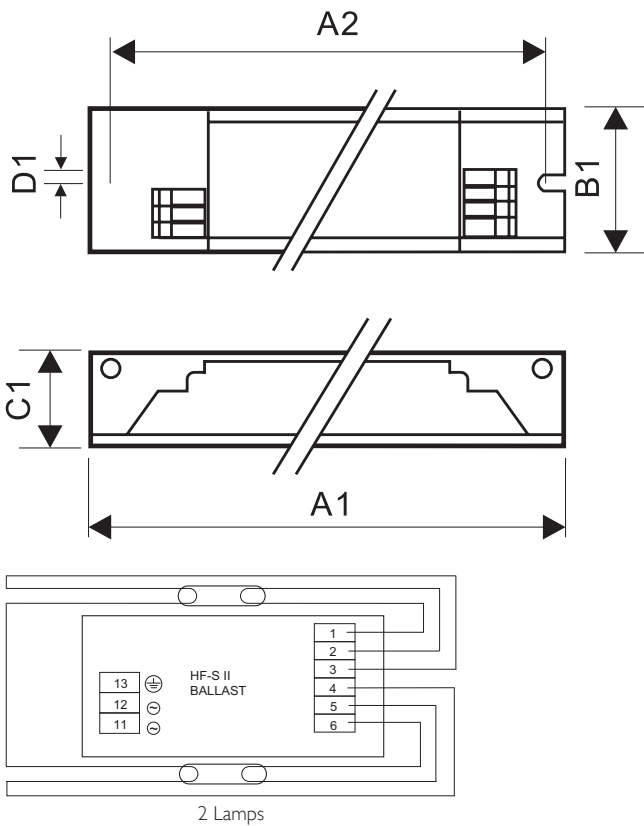

HF-S 236 TL-D II 220-240V 50/60Hz

Product	A1 (Norm)	A2 (Norm)	B1 (Norm)	C1 (Norm)	D1 (Norm)
HF-S 236 TL-D II 220-240V 50/60Hz	280	265	30	28	4.2

Ballast type

HF-S 236 TL-D II 220-220V 50/60Hz



© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, August 29
data subject to change