



# HF-Selectalume II for TL-D lamps

HF-S 136 TL-D II 220-240V 50/60Hz

HF-Selectalume II TL-D is the most cost-effective, reliable and outstanding solution for fluorescent lamps. These ballasts are part of an overall high-efficiency lighting system that may help you or your customers to achieve any international or local energy code you need to comply with. HF-Selectalume II TL-D ballasts are the ideal choice for a broad range of new construction and retrofit applications within the commercial sector, including general surface mounting or office lighting, parking garages, warehouses, waterproof and other applications.

## Product data

### • General Characteristics

Application code	II
Rated Lamptype	TL-D
Rated Number of Lamps	1 piece
Rated Ballast-Lamp Power	36
Line Voltage	220-240 V
Line Frequency	50/60 Hz
Housing	L 280x30x28
Energy Efficiency Index	A2 BAT
Lifetime 90% surv.@Tcaselife	50000 hr

### • Operating Characteristics

Automatic restart	Yes
Preheat time	1.6 s
Operating frequency *	45 kHz
Mains voltage safety (AC)	198-264V -10%/+10%
Mains voltage performance (AC)	202-254V -8%/+6%
Inrush current Peak	18 (max) A
Inrush current Width	0.35 ms
Earth leakage current	0.5 (max) mA
Power losses gear	3.8 W
Ballast Lumen Factor	1.05 -
PowerFactor 100% output power	0.98 -
Overvoltage protection 320Vac	48 hr
Overvoltage protection 350Vac	2 hr

Max ballast on MCB(16A type B)	28 x
Crestfactor	1.7 -
Hum and Noise level	< 30 dB(A)

### • Wiring Characteristics

Cable-Cap output-wires mutual	200 (max) pF
Conn.type input terminals	WAGO 744 connector
Conn.type output terminals	WAGO 744 connector [Suitable for manual wiring]
Max. cable length	0.75 m
Hot Wires	
Striplength	8.0-9.0 mm
Dual fixture Master/Slave	Possible, lamp wires 2m max. length [Master/Slave operation possible]
Wcs Input terminals	0.50-1.50 mm <sup>2</sup>
Wcs Output terminals	0.50-1.50 mm <sup>2</sup>
Cable-Cap hot output-wires-earth	200 (max) pF
Cable-Cap cold output-wires-earth	200 (max) pF

### • System Chars on driver level

Rated Lamp Power on TL-D	36
System Power on TL-D	38.8
Lamp Power on TL-D	35
Power Loss on TL-D	3.8

**PHILIPS**

# HF-Selectalume II for TL-D lamps

## • Temperature Characteristics

F-marking	Yes
T-case life	75 C
T-case maximum	75 (max) C
T-ambient	-20 (min), 55 (max) C
T-storage	-40 (min), 80 (max) C

## • Emergency Characteristics

Bal Lm Fac Emer- gency operation	0.7 -
Light output after 5 sec	50% of EBLF
Light output after 60 sec	100% of EBLF
Normal operating voltage (DC)	220-240 V
Batt volt guaranteed ignition	186-275 V
Batt volt guaranteed operation	176-275 V

## • Product Dimensions

Length A1	280 mm
Fixing Hole Distance	265 mm
Length A2	
Width B1	30 mm
Height C1	28 mm
Fixing Hole Diameter	4.2 mm
D1	


## • Approval & Application Chars

EMI 9kHz .. 30 MHz	EN 55015
Vibrations	IEC 68-2-6 Fc
Bumps	IEC 68-2-29 Eb (10G/16ms)
Approval marks	CE / CCC / ENEC / VDE-EMV
CE marking	Yes
ENEC certificate	Yes
C-Tick certificate	Yes
CCC certificate	Yes
PSB certification	Yes
TISI marking	Yes
SIRIM approval	Yes
CB Certificate	Yes

## • Product Data

Order code	913713032166
Full product code	913713032166
Full product name	HF-S 136 TL-D II 220-240V 50/60Hz
Order product name	HF-S 136 TL-D II 220-240V 50/60Hz
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8711500999290
Bar code on outerbox - EAN3	8727900905519
Logistic code(s) - 12NC	913713032166
Net weight per piece	0.200 kg

## Dimensional drawing

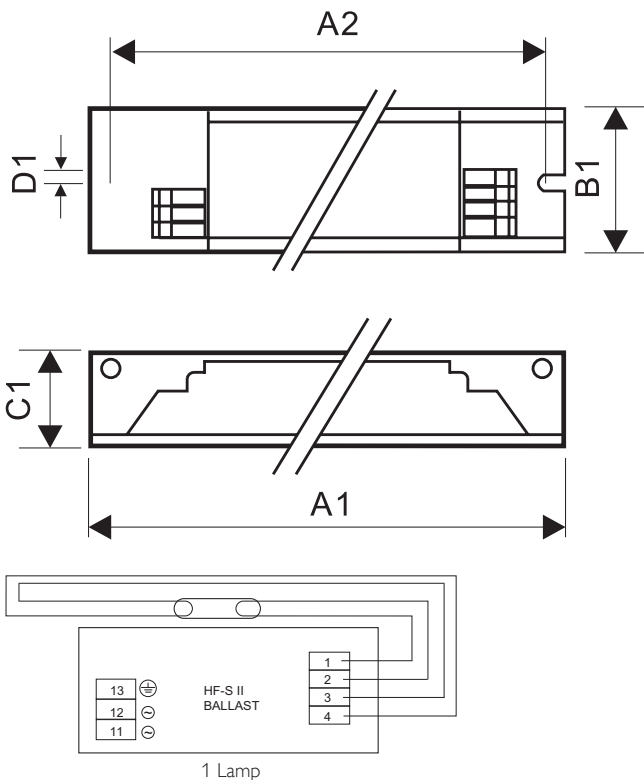

## HF-S 136 TL-D II 220-240V 50/60Hz

Product	A1 (Norm)	A2 (Norm)	B1 (Norm)	C1 (Norm)	D1 (Norm)
HF-S 136 TL-D II 220-240V 50/60Hz	280	265	30	28	4.2

# Ballast type

**HF-S I36 TL-D II 220-220V 50/60Hz**



© 2015 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2015, August 29  
data subject to change