




DUS804C Multifunction Sensor

Low profile recessed 360° flush mount ceiling sensor

The DUS804C is a recess mountable 360 degree multifunction sensor that combines motion detection (PIR), Infrared remote control reception (IR) and ambient light level detection (PE) into one device in applications such as offices, lecture theaters and homes.

- Motion detection feature — Detects the presence or absence of motion and adjusts lights accordingly.
- Segmented click-up bezel — Surrounds the motion sensor element and enables a portion of the sensing field to be masked. This prevents nuisance detection from adjacent doorways or corridors.
- Ambient light level detection and daylight harvesting — In applications where it is critical to maintain precise light, the PE function reads ambient levels and adjusts artificial light accordingly.
- Infrared receive capability — Manually adjust light levels using a hand-held remote control, via the inbuilt IR receive sensor of the DUS804C.
- Daylight Harvesting mode — Delivers automatic energy savings.

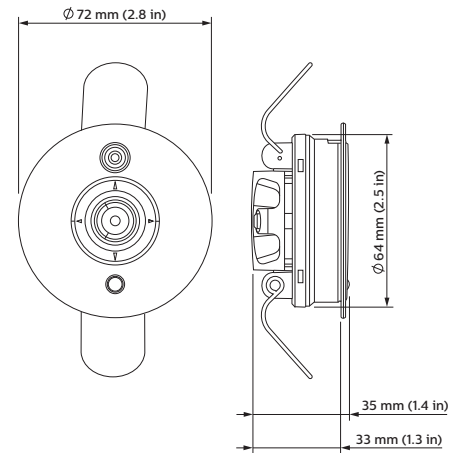


For detailed product information, please refer to the product information pages at www.philips.com/dynalite and follow the links.

Specifications

Due to continuous improvements and innovations, specifications may change without notice.

Item	Specification	Details
Hardware	Motion Detector	<p>DUS804C Standard sensitivity Maximum detection range: 5 m Detection area: 7.4 m to 5.6 m rectangular (at a height of 2.5 m) Detection speed: 1.0 m/s Detection object: 700 mm x 250 mm Detection zones: 64 LED activation indicator Sensor: Quad element pyroelectric</p> <p>DUS804C-SM Slight motion sensitivity Maximum detection range: 2 m Detection area: 5 m circular (at a height of 2 m) Detection speed: 0.5 m/s Detection object: 200 mm x 200 mm Detection zones: 104 LED activation indicator Sensor: Quad element pyroelectric</p>
	PE Cell	Range <5 lux to >5000 lux Automatic 'Daylight Harvesting' mode
	Infrared Remote Control Receiver	Range up to 6 m LED activation indicator Can be used with DTK500 series infrared remotes or other learning IR remote control
	Terminals	Standard: 5 way terminal strip, 1 x 2.5 mm ² max conductor size RJ12 Option: Two RJ12 network sockets
	Controls	Walk test/IR received LED indicator Tamper switch
Network	Control Inputs/Outputs	One RS-485 DyNet serial port
	DyNet DC Load	20 mA
	Configurations	All functions remotely programmable
Physical	Dimensions (H x W x D)	72 mm dia. x 35 mm (2.8" dia. x 1.4")
	Packed Weight	0.116 kg
	Construction	ABS plastic enclosure
	Operating Conditions	Temperature: -0 to 45° C ambient Humidity: 10 to 90% non-condensing
	Storage & Transport	Temperature: -25 to 60° C ambient Humidity: 0 to 90% non-condensing
Certification	Certification	CE, C-Tick
Options & Ordering	Standard Product	DUS804C (Philips 12NC - 913703071009)
	Slight motion sensitivity	DUS804C-SM (Philips 12NC - 913703071109)
	2 x RJ12 network sockets	DUS804C-RJ (Philips 12NC - 913703071209)
	2 x RJ12 sockets/slight motion	DUS804C-RJ-SM (Philips 12NC - 913703071309)

Lens Pattern

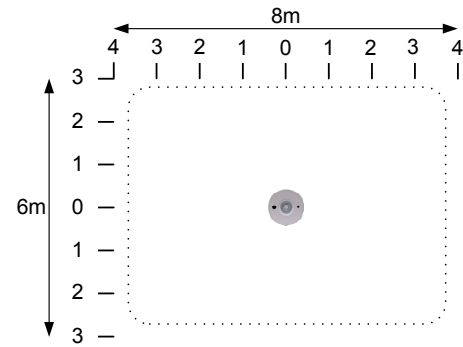

Philips Dyalite
 6 / 691 Gardeners Road
 Mascot, NSW 2020
 Australia
 Tel: +61 2 8338 9899
 Email: dyalite.info@philips.com
 Web: www.philips.com/dyalite

Specifications subject to change without notice. ©WMGD Pty Ltd Trading as Dyalite. Unit 6, 691 Gardeners Road Mascot 2020 Australia. ABN 33 097 246 921. All rights reserved. Dyalite, DyNet and associated logos are the registered trademarks of WMGD Pty Ltd. Not to be reproduced without permission.