



# PAR38 LED

## 17PAR38/EXPERTCOLOR RETAIL/F25/930/DIM

Philips PAR38 LED Single Optic Lamps with AirFlux Technology improves shopping experience with superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.


### Product data

General Information		Lamp Current (Nom)	
Cap-Base	E26 [ Single Contact Medium Screw]	Wattage Equivalent	120 W
Nominal Lifetime (Nom)	25000 h	Starting Time (Nom)	0.5 s
Switching Cycle	50000X	Warm Up Time to 60% Light (Nom)	0.5 s
Technical Type	17-120W	Power Factor (Nom)	0.9
		Voltage (Nom)	120 V
Light Technical		Temperature	
Color Code	930 [ CCT of 3000K]	T-Case Maximum (Nom)	90 °C
Beam Angle (Nom)	25 °		
Luminous Flux (Nom)	1200 lm	Controls and Dimming	
Luminous Flux (Rated) (Nom)	1200 lm	Dimmable	Yes
Luminous Intensity (Nom)	6000 cd	Approval and Application	
Color Designation	White (WH)	Suitable For Accent Lighting	Yes
Rated Beam Angle	25 °	Product Data	
Correlated Color Temperature (Nom)	3000 K	Order product name	17PAR38/EXPERTCOLOR RETAIL/F25/930/DIM
Luminous Efficacy (Rated) (Nom)	70 lm/W	EAN/UPC - Product	046677471002
Color Consistency	<6	Order code	929001285304
Color Rendering Index (Nom)	90	Numerator - Quantity Per Pack	1
LLMF At End Of Nominal Lifetime (Nom)	70 %	Numerator - Packs per outer box	6
Operating and Electrical		Material Nr. (12NC)	929001285304
Input Frequency	60 Hz		
Power (Rated) (Nom)	17 W		




# PAR38 LED

## Photometric data




PAR38 120V 17-120W 25D 3000K E26 D WH

## Lifetime

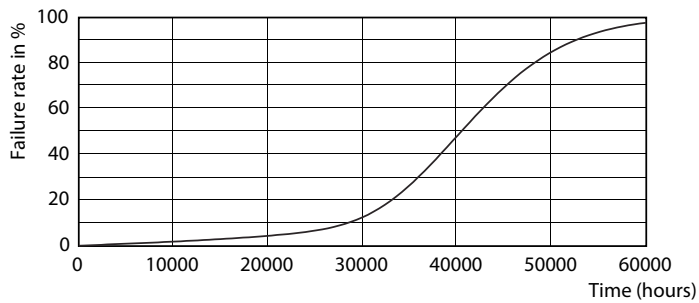

ExpertColor PAR38 30S 30L Dim 120V Life Expectancy Diagram

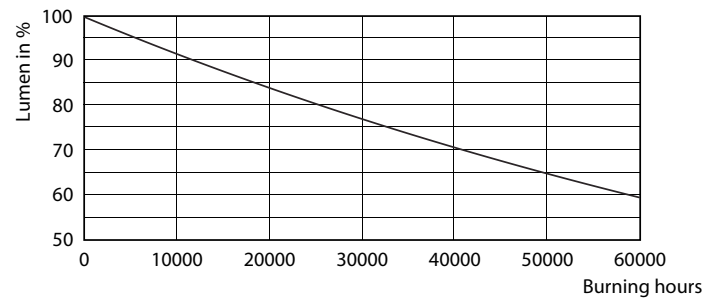

ExpertColor PAR38 30S 30L Dim 120V Lumen Maintenance Diagram

