





## DR2PE Revolution Series User Interfaces

Clip-on cover system provides the ultimate design flexibility

The Philips Dynalite Revolution series of user interfaces provides a direct connection to the DyNet network. The devices can communicate directly with each other, with lighting load controllers and with other integration devices, offering a simple user interface capable of complex automation system functions. The DR2PE range is suitable for, but not limited to, European, Middle Eastern, African and Asian markets.

- Extensive designer range — Innovative clip-on cover fastening system provides the ultimate flexibility in décor-matching. Standard finishes include brushed stainless steel and white or black glass. Custom options available in wood grain, processed stone, laminate or fabric.
- A choice of button colors — To complement the cover color and finish choice, buttons are available in silver, white or charcoal grey. Buttons with IR receive capability are also offered, giving flexible control via a hand-held remote.
- Custom engraving options — Identification of button function is made simple through custom engraving. Buttons can be labeled to identify purpose or area, providing accurate explanation of function. Backlighting assists to locate the panel and provides ease of readability, even in a darkened environment.
- LED status indicators — Easily discern which mode is in operation via the LED indicator on each button.
- Standard control options — Each button can be programmed to perform a range of standard control options that are individually configured to perform functions including toggle lighting on/off and ramp lighting up/down.
- Complex functionality in a single action — A single button press can be used to effect an entire system change, providing a true automation solution.
- Designed to meet any requirement — Available in one to 24 button configurations, the Revolution series user interfaces can be designed to perform as many or as few functions as required.

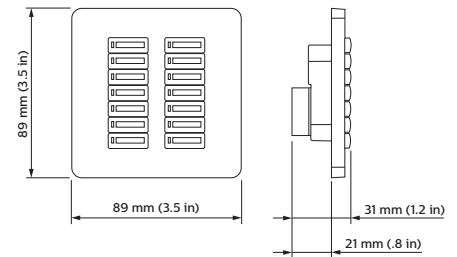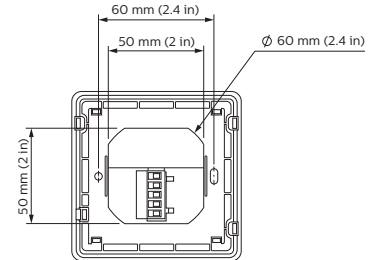

For detailed product information, please refer to the product information pages at [www.philips.com/dynalite](http://www.philips.com/dynalite) and follow the links.

# Ordering

The Philips Dynalite Revolution series provides limitless flexibility and design choice through provision of finish, color, backlight and engraving options. Select one component from each column to specify a complete configuration.

Series Prefix      Column 1      Column 2 (X if not being used)      Column 3 (X if not being used)      Always X

## DR2PE-MXX-X-C-WE-P-BW-X-C-L

Column Configurations *See notes below			IR Button Cap		Button Color		Cover Finish		Option		Engraving ##	
A	B	C	X	Not fitted	W	White	SS	Brushed Stainless Steel	P	Pluggable Screw Terminal	C	Custom
			I **	Fitted	C	Charcoal	BG	Black Borosilicate Glass	LEDs & Backlight#		S	Standard
<b>D</b>	<b>E</b>	<b>F</b>	<b>** IR Button Cap Note:</b> If IR receiver selected, button color choice must be charcoal.		S	Silver	SG	White Optically Clear Starfire Glass	BW	Blue Indicator LEDs White Backlight	N	None
							PB	Polished Brass (gold plated stainless)			<b>## Engraving Note:</b> If Standard engraving selected, buttons will be engraved as shown in Column Configuration illustrations for single column UIs. For dual column UIs, numbering will start at top-most left button and continue to bottom-most right hand button.	
<b>G</b>	<b>H</b>	<b>I</b>					AB	Antique Bronze				
							WE	White (powder coated stainless)				
<b>J</b>	<b>K</b>	<b>L</b>					MS	Mirrored Stainless Steel				
							XX	No cover				
<b>M</b>	<b>Q</b>	<b>R</b>										

**# Backlight Note:**  
BW option only available with charcoal button caps.

Engraving Definition	
X	Standard
C	Custom (details must accompany order)

## Specifications

Due to continuous improvements and innovations, specifications may change without notice.

Item	Specification	Details
Electrical	DyNet DC Supply	12 V @ 50 mA from the DyNet network
	Control Inputs	One RS-485 DyNet serial port
Physical	Dimensions (H x W x D)	89 mm x 89 mm x 31 mm (3.5" x 3.5" x 1.2")
	Packed Weight	0.2 kg
	Construction	Bezel, Key Carrier and Gridplate: Polycarbonate Cover: Various - contact your Philips representative for information
	Operating Conditions	Temperature: -0 to 50° C ambient Humidity: 10 to 95% non-condensing
Storage & Transport	Temperature: -25 to 60° C ambient Humidity: 0 to 90% non-condensing	
Certification	Certification	CE, C-Tick

**\* Column Configuration Notes:**  
1. Configurations A-F & H are only available in single column layouts. All others are available in single or dual column.  
2. OLEDs come non-programmed as standard. eg. include applications for HVAC & AV. Maximum one OLED per panel. Always positioned right-hand column.



Philips Dynalite  
6 / 691 Gardeners Road  
Mascot, NSW 2020  
Australia  
Tel: +61 2 8338 9899  
Email: [dynalite.info@philips.com](mailto:dynalite.info@philips.com)  
Web: [www.philips.com/dynalite](http://www.philips.com/dynalite)



Specifications subject to change without notice. ©WMGD Pty Ltd Trading as Dynalite. Unit 6, 691 Gardeners Road Mascot 2020 Australia. ABN 33 097 246 921. All rights reserved. Dynalite, DyNet and associated logos are the registered trademarks of WMGD Pty Ltd. Not to be reproduced without permission.