

Extra
long life,
extra low mercury.



PHILIPS
T8 32W TWICE
THE LIFE LAMPS

ALTO II TCLP
Compliant*

Philips T8 32W Twice the Life Lamps featuring ALTO II Technology offer long life and reduce maintenance.

Extra long life

- Significantly reduce maintenance and recycling costs by extending the relamping cycle
- Almost twice the longer life than an industry standard T8 lamp**
- Limited warranty period based on usage*

Outstanding lumen performance

- 97% lumen maintenance and reduced lamp-end blackening

Better for the environment

- Only 1.7mg of mercury with ALTO II Technology
- Reduced impact on the environment without sacrificing performance

(*; **, + See back of page for footnotes)

PHILIPS

PHILIPS T8 32W TWICE THE LIFE LAMPS

Ordering, Electrical and Technical Data (Subject to change without notice)

Product Number	Ordering Code	Watts	Pack Qty.	Color Temp. (K)	Nom. Length (in.)	Rated Average Life (Hrs.) ¹		Approx. Initial Lumens ²	Design Lumens ³	CRI	Lumen Maint.
						12-hr on Instant Start	12-hr on Prog. Start				
43405-0	F32T8/835ADV/2XL/ALTO	32	30	3500	48	52,000	70,000	2950	2800	84	97%
43406-8	F32T8/841ADV/2XL/ALTO	32	30	4100	48	52,000	70,000	2950	2800	82	97%
43407-6	F32T8/850ADV/2XL/ALTO	32	30	5000	48	52,000	70,000	2850	2700	82	97%

- Average life under engineering data with lamps turned off and restarted once every 12 operating hours.
- Approximate initial lumens. The lamp lumen output is based upon lamp performance after 100 hours of operating life, when the output is measured during operation on a reference ballast under standard laboratory conditions. For expected lamp lumen output, commercial ballast manufacturers can advise the appropriate ballast factor for each of their ballasts when they are informed of the designated lamp. The ballast factor is a multiplier applied to the designated lamp lumen output.
- Design lumens are the approximate lamp lumen output at 40% of the lamp's rated average life. This output is based upon measurements obtained during lamp operation on a reference ballast under standard laboratory conditions. Design lumens rated at 3 hours per start on instant start ballast.
- Average life under specified test conditions with lamps turned off and restarted no more frequently than once every 3 operating hours. Lamp life is appreciably longer if lamps are started less frequently.
Lamp meets US Federal Minimum Efficiency Standards.


- This lamp is better for the environment because of its reduced mercury content. All Philips ALTO II lamps give you end-of-life options which can simplify and reduce your lamp disposal costs depending on your state and local regulations.

Footnotes from the front:
 * The EPA's TCLP test is used to determine if an item can be managed as hazardous or nonhazardous waste. Philips ALTO and ALTO II lamps are TCLP Compliant and can be managed as non-hazardous waste.


** When replacing a standard 4' T8 32W lamp with 24,000 hours rated average life and 2850 lumens with a Philips T8 32W Twice The Life lamp with 46,000 hours rated average life and 2950 lumens. RAL based on 3 hours per start on an instant start ballast.

+ See your sales representative for details

97% Lumen Maintenance Philips T8 32W 2XL Lamps

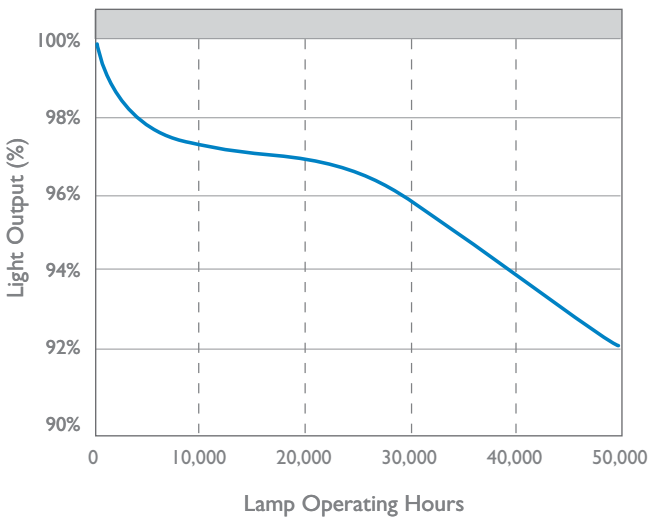

Rated Average Life Philips T8 32W 2XL Lamps

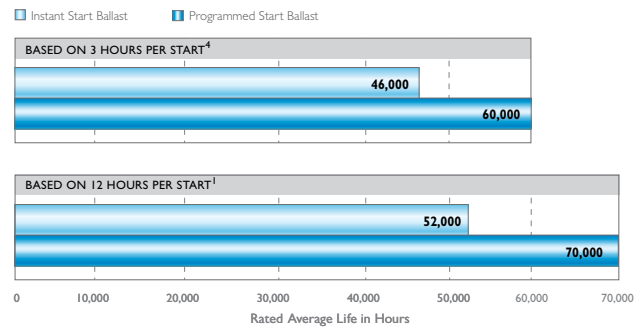

© 2014 Koninklijke Philips N.V.
 All rights reserved.
 Specifications are subject to change without notice.

PLt-1418BN 06/14

Philips Lighting
 North America Corporation
 200 Franklin Square Drive
 Somerset, NJ 08873
 Phone: 855-486-2216

Philips Lighting Company
 281 Hillmount Road
 Markham ON, Canada L6C 2S3
 Phone: 800-668-9008