

	<p>Step-down Transformer</p>	<p>Catalog Number: 71A9741-600J Step-down Transformer 277V:120V Max VA Load: 300 Status: RELEASED</p>
---	-------------------------------------	---

DIMENSIONS AND DATA

7/8 E-I Core

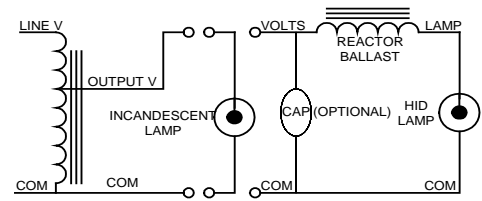
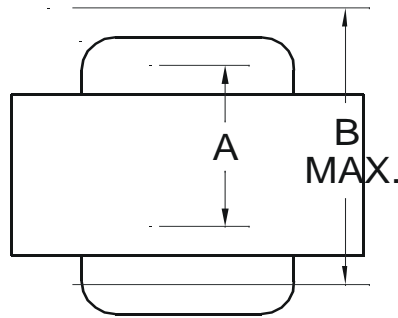


Fig. T-2

A Dimension	B Dimension	Input	Output
2.0"	4.0" (J-Box "B" DIM)	277V	120V
		1.1 A max.	300 VA Load max.
		300W	for 300W Incand.

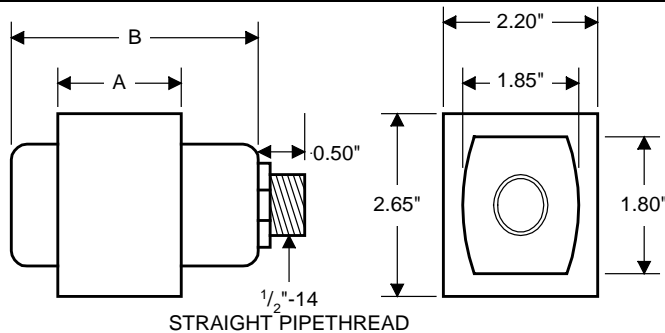


Fig. 11
J-Box Ballast

(2.4A Max.)



E65627
AD 180

Data is based on tests performed by Philips Advance in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

Philips Lighting Electronics

10275 West Higgins Road • Rosemont, IL 60018 • www.philips.com/advance
 Tel: 800-322-2086 • Fax: 800-423-1882 • Customer Support: 800-372-3331 • OEM Support: 866-915-5886