

	<p><b>Step-down Transformer</b></p>	<p>Catalog Number: 71A9839-600J                  Step-down Transformer                  277V:120V                  Max VA Load: 200                  Status: RELEASED</p>
---	-------------------------------------	---

**DIMENSIONS AND DATA**

**7/8 E-I Core**

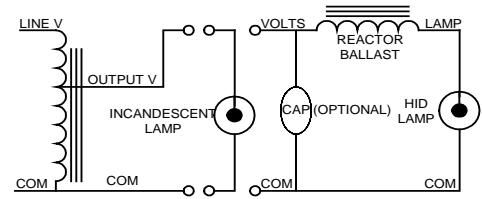
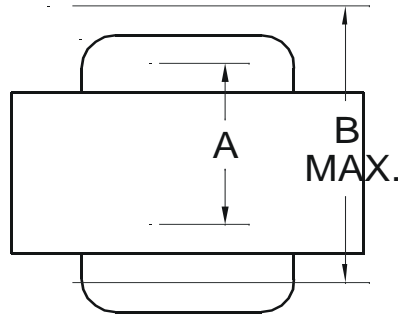


Fig. T-2

<b>A Dimension</b>	<b>B Dimension</b>	<b>Input</b>	<b>Output</b>
2.2"	4.2" (J-Box "B" DIM)	277V	115V
		0.8A max.	200 VA Load max.
		199W	for 200W Incand.

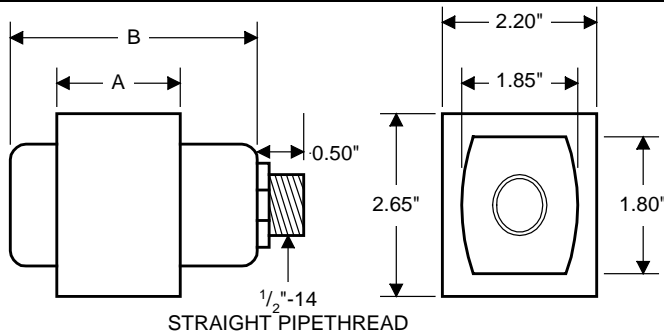


Fig. 11  
J-Box Ballast



E65627  
AD 180

Data is based on tests performed by Philips Advance in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

**Philips Lighting Electronics**

10275 West Higgins Road • Rosemont, IL 60018 • www.philips.com/advance  
 Tel: 800-322-2086 • Fax: 800-423-1882 • Customer Support: 800-372-3331 • OEM Support: 866-915-5886