


XR025C100V036XPM1

Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A TE/0-10V
Input Voltage	120V
Input Frequency	60Hz
RoHS	Yes
Status	Released

Electrical Specifications

Output Power (W)	Output Voltage (V)	Output Current (A)	Efficiency@ Max Load	Max Case Temp. (°C)	Input Current	Max. Input Power (W)	Inrush Current (A _{in} /50%-µs)		THD @ Max Load (%)	Power Factor @ Max Load	Surge Protection Common/Diff (KV)	Weight (Lbs/kgs)	Envir. Protection Rating
25	18 ~ 36	0.3-1.0	120V	75 °C	120V	34	120 Vin	13.7/ 160	12	>0.9	1.5/1.5	0.981/ 0.445	UL Dry & Damp
			81.5%		0.28A								


Wire Diagram

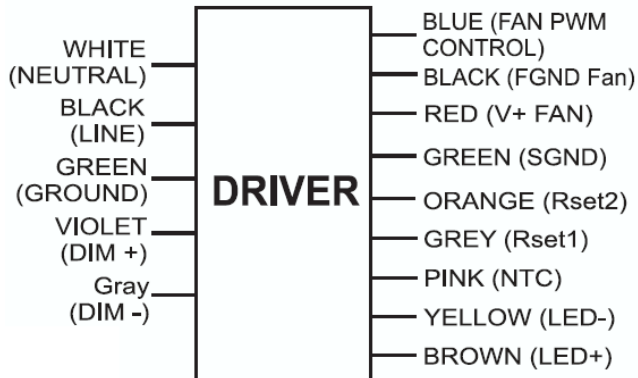

Input and output use lead-wires.
Lead-wires are 18AWG 105C/600V solid copper.

Dimming Method	Dimming Range	Minimum Output Current (A)	Min (typ). Output Power(W)	Other Comments
0-10V	10% ~ 100%	0.03	0.5	
Trailing edged	10% ~ 100%	0.03	0.5	

Enclosure



	in. (mm)
Case Length	4.21 (107)
Case Width	2.99 (76)
Case Height	1.29 (33)
Mounting Length	4.96 (126)
Mounting Width	2.99 (76)



Revised 03/05/2012

PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886



XR025C100V036XPM1

Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A TE/0-10V
Input Voltage	120V
Input Frequency	60Hz
RoHS	Yes
Status	Released

Electrical Specifications

Product Data

Order code	XR025C100V036XPM1
Full product code	XR025C100V036XPM1
Full product name	Xitanium 25W 0.3-1.0A TE/0-10V Dimming
Net weight per piece	0.455 KG / 0.981lbs
Interfaces	0-10V Dimming
Ambient Temp Range	-20C to +50C
Corresponding Tcase	-15C to +75C
Line Voltage	120V
Line Current	0.28A @ 120V
Line Frequency	60Hz
Envir. Protection Rating	UL Dry & Damp
Life @ TC 75 C	50000 hr
Suitable for Outdoor use?	NO
Max TC	75C
Inrush current Width	Refer to table
Min ballast number on MCB 16A type B	20
Input Over-voltage	Can survive input over-voltage stress of 320VAC for 48 hours and 350VAC for 2 hours
LED Current Tolerance	+/- 5% with full load
Earth leakage current	0.7 mA [max]
Mains voltage safety (AC)	+/-10%
Mains voltage performance (AC)	+/-10%
Min. Mains voltage operational	108 V [min]
Output peak voltage	40V [max]
Output Current ripple	20% @ 1000 mA (ripple = pk/avg)
THD total	< 20% @ max load
PF @ Max Load	>0.90
Wire Isolation	All wires are Double isolated to ground
Protections	Short Circuit and Open Circuit Protection for LED + and LED-

Revised 03/05/2012

PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886



XR025C100V036XPM1

Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A TE/0-10V
Input Voltage	120V
Input Frequency	60Hz
RoHS	Yes
Status	Released

Electrical Specifications

Installation & Application Notes:

Section I – Physical Characteristics

- 1.1 LED Driver shall be installed inside an electrical enclosure
- 1.2 Wiring inside electrical enclosure shall comply with 600V/105°C rating or higher.

Section II – Performance

- 2.1 LED Driver has a rated lifetime of 50,000 hours @ TC <=75C.
- 2.2 LED Driver tolerates sustained open circuit and short circuit output conditions without damage.
- 2.3 LED Driver maximum allowable case temperature is 75°C – see product label for measurement location.
- 2.4 LED Driver complies with the requirements of UL, CSA, FCC47 subpart 15.

Section III – UL Conditions of Acceptability (File E321253)

When installed in the end product, consideration shall be given to the following:

- 3.1 The equipment shall be installed in compliance with the enclosure, enclosure, mounting, spacing, casualty and the segregation requirements of the ultimate application.
- 3.2 Consideration should be given to measuring the temperatures on electronic components of power circuits and transformer windings when the unit is installed in the end-use equipment based upon mounting orientation, operating ambient and ventilation. Magnetic components L200, L300, L500 employ Class 130(B) insulation.
- 3.3 These drivers should be used within the recognized ratings.
- 3.4 The driver is suitable for use in “DAMP” and “DRY” locations.
- 3.5 The maximum available output parameters from 0-10v dimming circuit provided on LED driver were tested in accordance with supplement (SB) of UL935 and was found permissible for connection via Class 2 wiring.
- 3.6 When the drivers are installed in the end-use application, the case temperature should not exceed the temperature limits specified in the following table:

Model No.	Input Voltage, Hz	Max. Case @ Tc, °C
XR025C100V036XPM1	120, 60 Hz	75

- 3.7 The maximum measured leakage current was 0.10 MIU while was connected to a 120 V branch Source.

Revised 03/05/2012

PHILIPS LIGHTING ELECTRONICS N.A.




10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886



XR025C100V036XPM1

Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A TE/0-10V
Input Voltage	120V
Input Frequency	60Hz
RoHS	Yes
Status	Released

Electrical Specifications

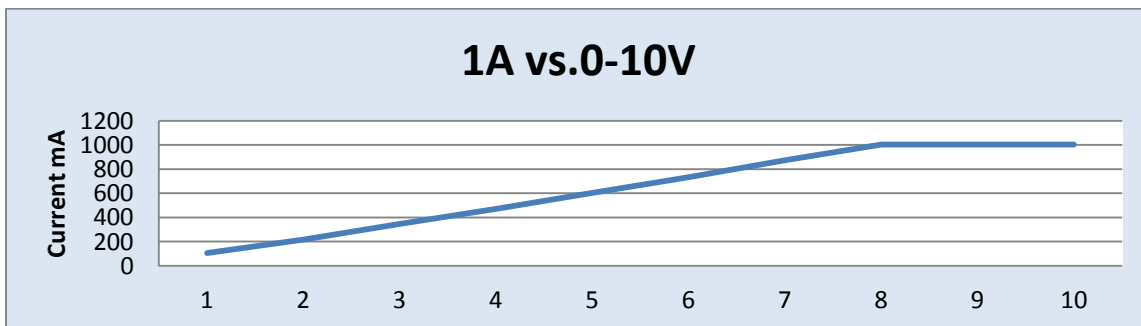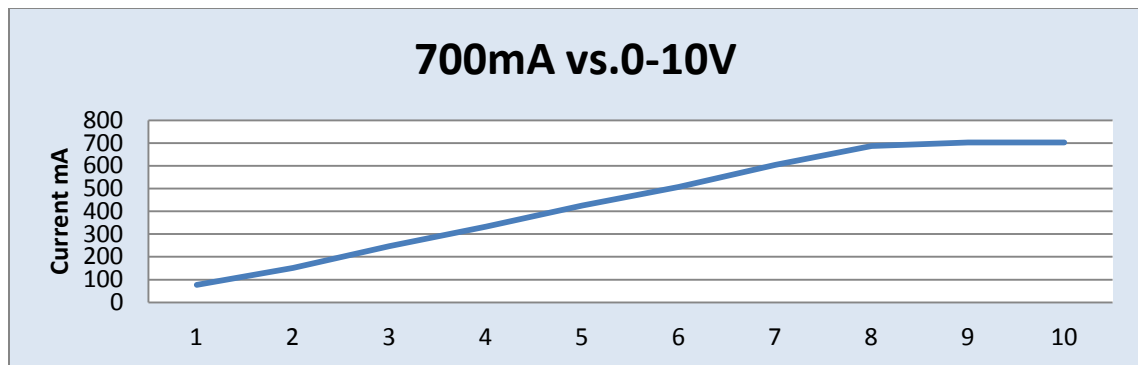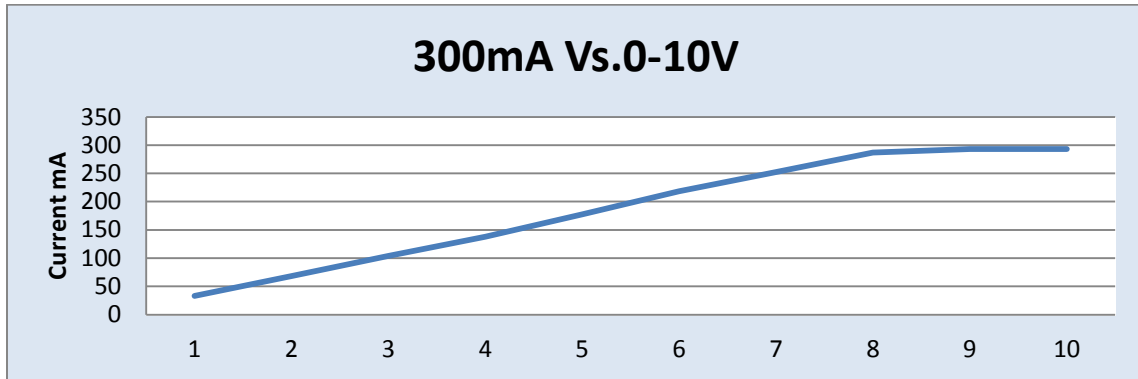

Revised 03/05/2012

XR025C100V036XPM1

Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A TE/0-10V
Input Voltage	120V
Input Frequency	60Hz
RoHS	Yes
Status	Released


Electrical Specifications

AOC (Adjustable Output Current) Settings:


LED current tolerance with variation of Rset 1 is within +/- 5% of Imax

1.1 Rset2 Table

(Valid Range of Current 0.3-1.0A)

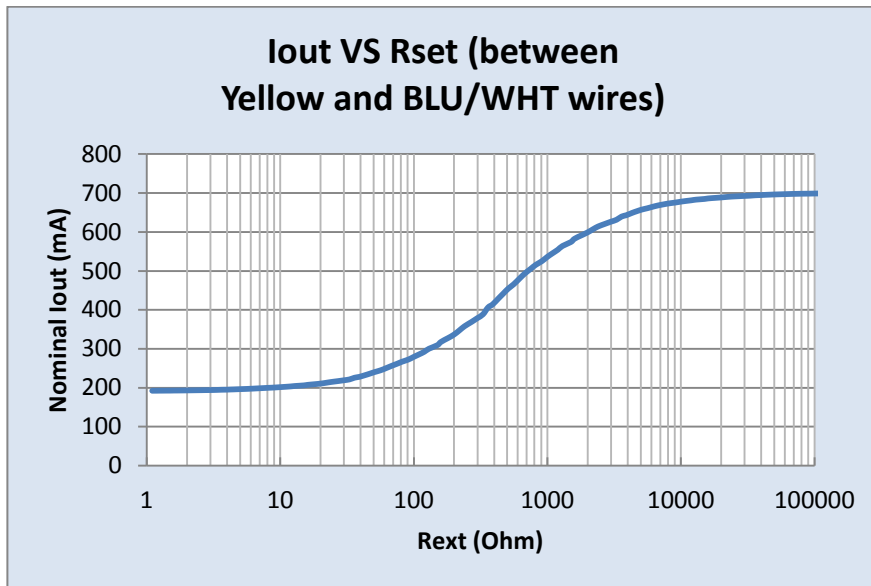

Rset1 (Ohms)	Current(mA)
1	191
100	214
620	309
910	347
935	350
1500	406
2200	455
3000	494
4115	530
4300	536
8200	599
18000	649
100000	691
1000000	700

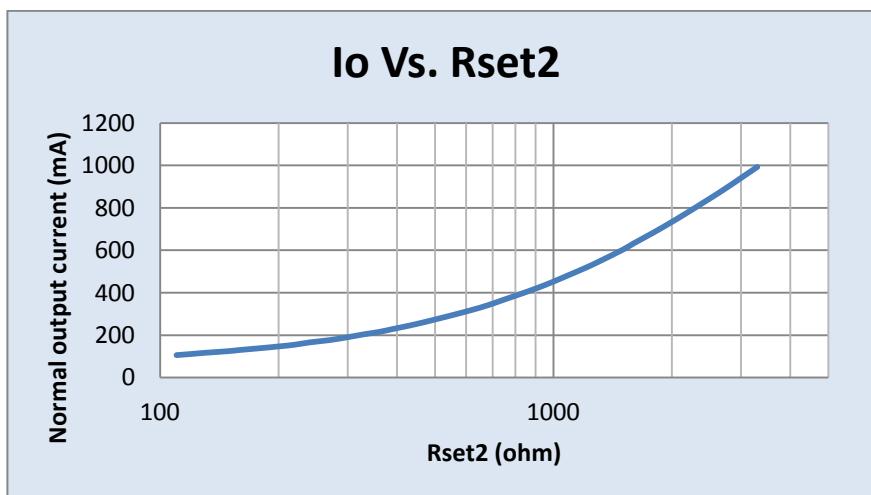

Rset2(Ohms)	Current(mA)
100	100
270	176.4368
360	214.6552
470	261.0632
560	296.5517
680	340.2299
750	367.5287
1000	452.1552
1300	544.9713
1500	602.2989
1800	684.1954
2700	883.477
3300	992.6724

Revised 03/05/2012

PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018

Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance


Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886

XR025C100V036XPM1

Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A TE/0-10V
Input Voltage	120V
Input Frequency	60Hz
RoHS	Yes
Status	Released

Electrical Specifications

25W high current, operating range 18-36V, 300-1000mA:

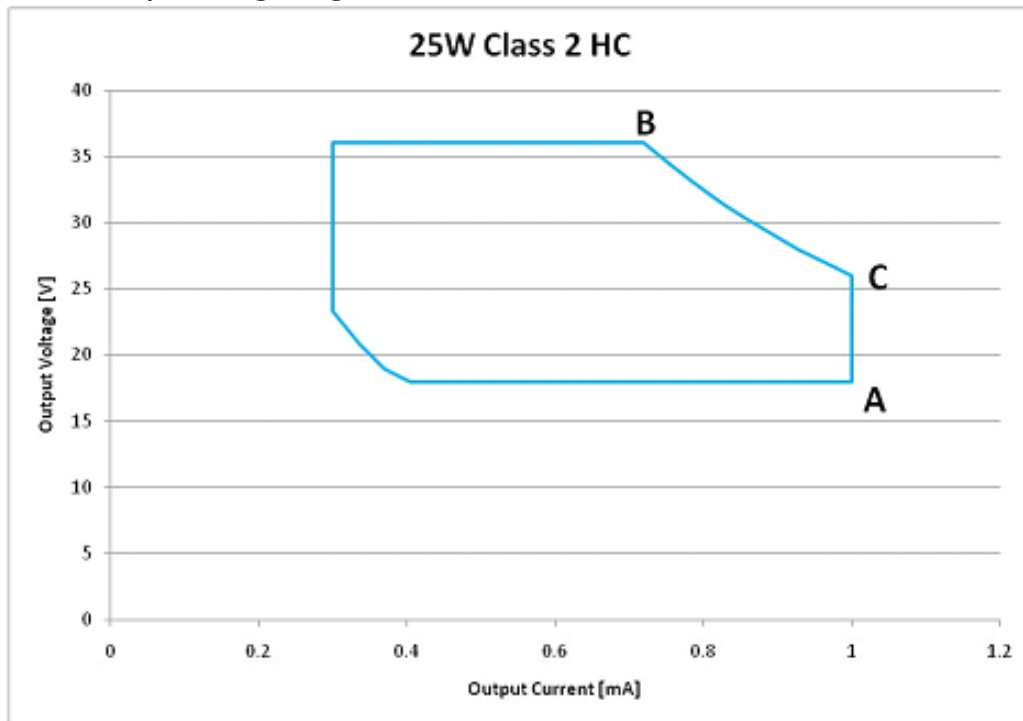

Edged Dimming performance note:

- Between 27V and 36V (full load) dimming performance is ok for all dimmers;
- Between 24V and 27V (full load) dimming performance (instabilities in light level) is dimmer dependent;
- Below 27V (full load) not recommended, instabilities in light level may occur during dimming and switching on.

Revised 03/05/2012

PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886


XR025C100V036XPM1

Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A TE/0-10V
Input Voltage	120V
Input Frequency	60Hz
RoHS	Yes
Status	Released


Electrical Specifications

Module Thermal Protection can be implemented between 65C to 90C. Please refer to design guide for more details

NTC part can be used: NTC from Vishay, part number is 238161554153 (15kOhm \pm 2% NTC, B25/85=3700)

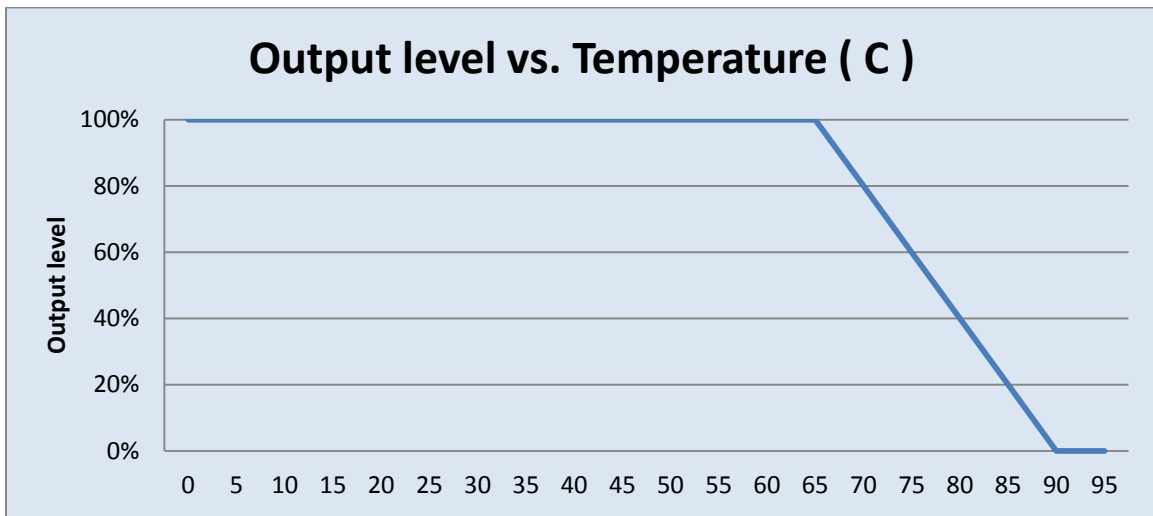

THD vs. Vin of Driver:

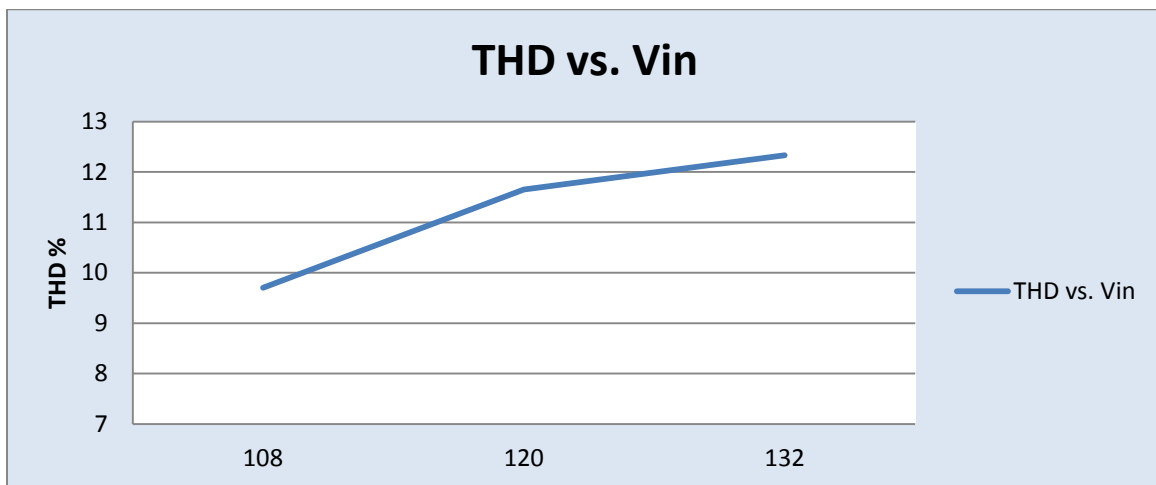

Revised 03/05/2012




XR025C100V036XPM1


Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A TE/0-10V
Input Voltage	120V
Input Frequency	60Hz
RoHS	Yes
Status	Released

Electrical Specifications

THD vs. Output Power

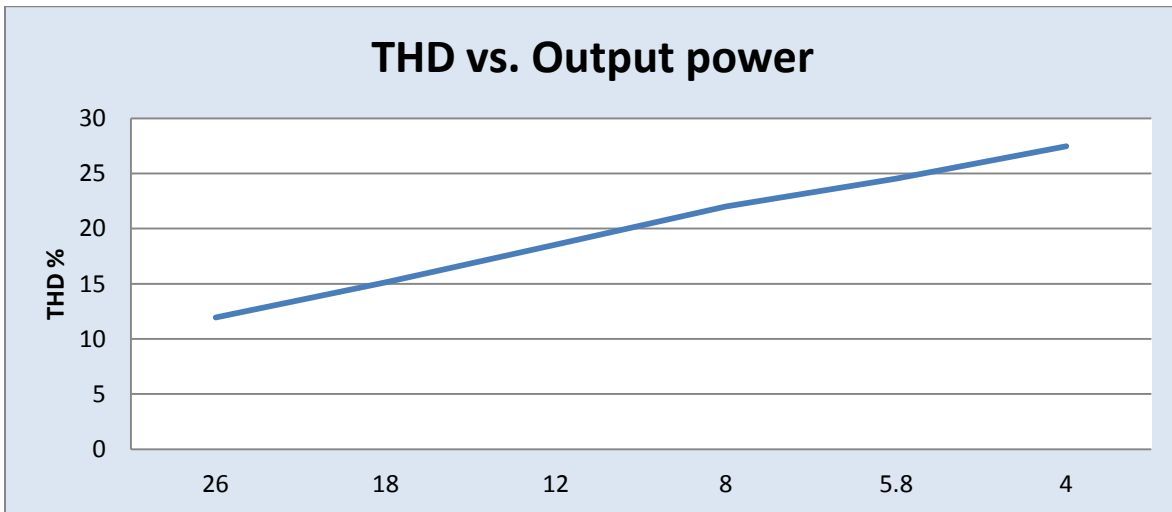

Efficiency vs. Output power

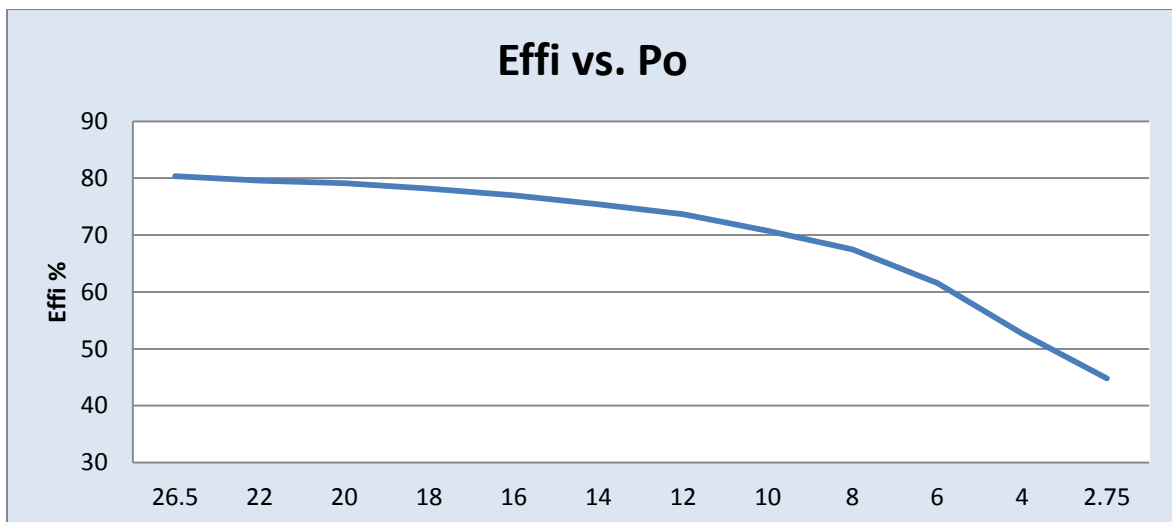


Revised 03/05/2012

XR025C100V036XPM1

Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A TE/0-10V
Input Voltage	120V
Input Frequency	60Hz
RoHS	Yes
Status	Released


Electrical Specifications

Inrush Current Info:

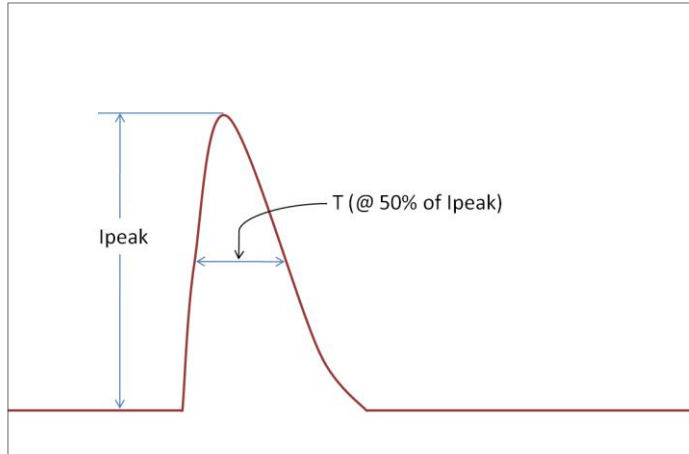

Vin	Ipeak	T (@ 50% of Ipeak)
120 Vrms	13.7 A	160 μ s

Lifetime vs. Tcase of Driver:

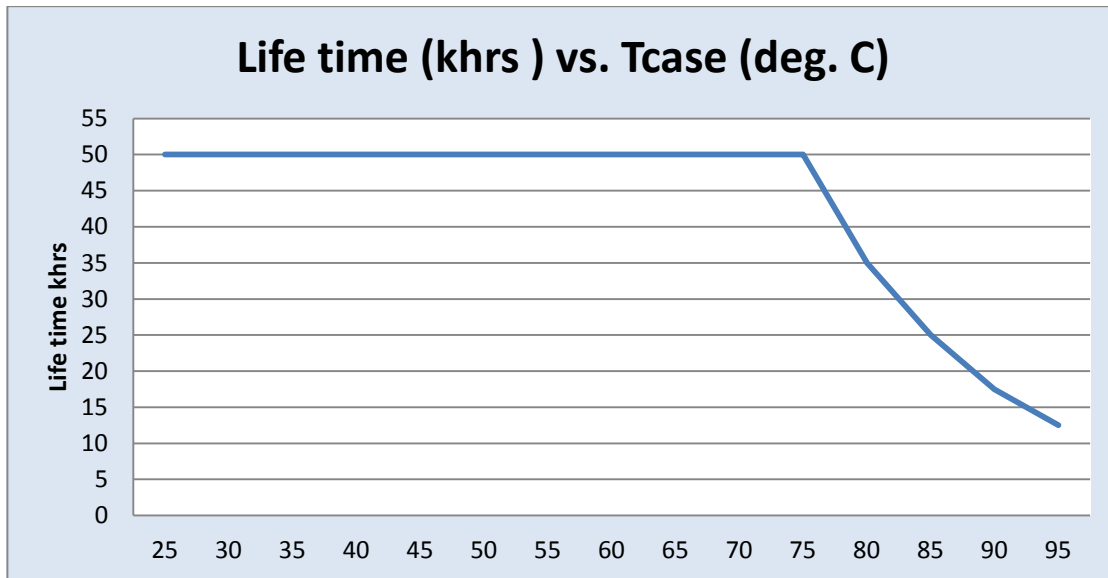

Revised 03/05/2012



XR025C100V036XPM1

Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A TE/0-10V
Input Voltage	120V
Input Frequency	60Hz
RoHS	Yes
Status	Released

Electrical Specifications

Failure Rate Info:

1. <0.2% per 1 kWh @<= Tcase 75 C

Isolation:

Isolation	Input Wires	Output Wires	0-10v Wires	Chassis
Input Wires	NA	2150	1500	2150
0-10v Wires	1500	500	NA	500
Chassis	2150	500	500	NA

Dimmer compatibility list	Lightolier ZP260QE (ELV 3-way)
	Lutron DVELV-303P (ELV 3-way)
	Leviton VZE06-1LZ (ELV 3-way)
	Lutron SELV-300P
	Lightolier ZP425QE
	Leviton IPEO4-1LX

Revision History:

Rev No.	Date	Description	Approval	Remarks
1.1	1/20/2012	* Add Envir. Protection Rating	N.T.	
1.2	03/02/2012	*Remove the "M" at the end of part#	N.T.	
1.3	03/05/2012	*Update Rset2 Table	N.T.	

Revised 03/05/2012

PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018

Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance

Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886